


Turbo Tube Silent M

IN METAL NOISE ABSORBING CASE

Fresh air in
your house!



REVOLUTIONARY QUIET & ENERGY EFFICIENT

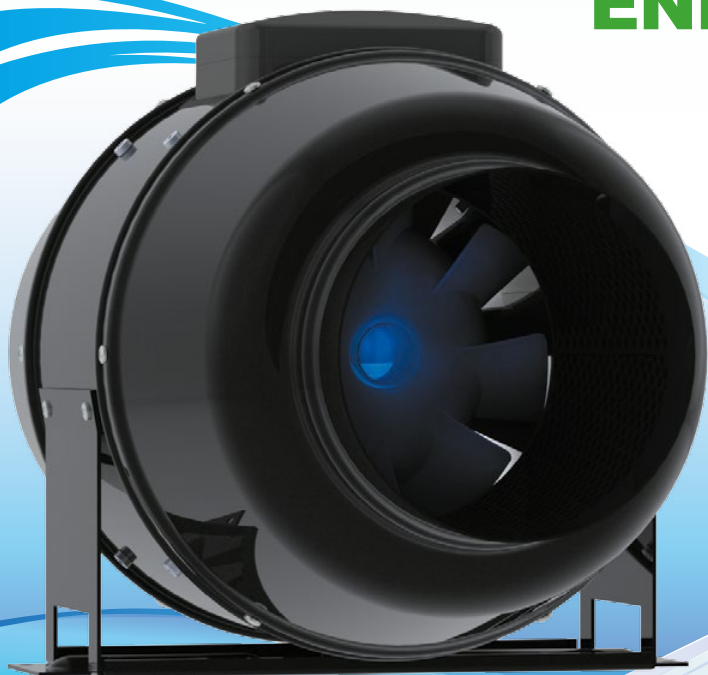

SOLUTION FOR:

- MOVIE THEATERS
- LIBRARIES
- MAN CAVES
- EDUCATION FACILITIES
- APARTMENTS
- GALLERIES and more
- OFFICES

Following the latest worldwide ventilation trends we developed a **NEW INLINE MIXED FLOW FAN – TURBO TUBE SILENT M** series – with **Super Low Noise** and **Excellent Aerodynamics**.

TURBO TUBE SILENT M fans provide ultra quiet operation & excellent airflow even in high pressure systems. The specifically designed and optimized case and the new aerodynamic mixed flow impeller ensure the highest performance.

TURBO TUBE SILENT M – BENEFITS

- SILENT OPERATION: **0.3 – 4.0 Sones**
- HIGH PERFORMANCE: **up to 1050 CFM**
- ENERGY EFFICIENT: **22 – 353 W**
- DUCT COMPATIBILITY: **Ø 4", 5", 6", 8", 10", 12 3/8"**
- COMPATIBLE WITH HIGH PRESSURE SYSTEM
- DOUBLE-SPEED CAPACITOR MOTOR WITH THERMAL OVERLOAD PROTECTION
- LONG-LIFE BALL BEARING (up to 40 000 hours)
- BUILT-IN SPEED SWITCH & POWER CORD
- ROTARY AND REMOVABLE CENTRAL BODY FOR EASY INSTALLATION & MAINTENANCE
- COMPACT SIZE FOR LIMITED SPACES
- DURABLE METAL NOISE ABSORBING CASE
- VIBRATION – FREE OPERATION



Tel: 888-640-0925
513-348-3853
Fax: 513-268-4597
Sales@ventsus.com
VentsUS.com
11013 Kenwood Road, Cincinnati, Ohio 45242




Turbo Tube Silent M product sheet


Dimensions

Model	Measurements [in.]				
	ØD	B	B1	H	L
TT Silent M 100	3 7/8"	8 7/16"	9 9/16"	9 5/16"	19 7/8"
TT Silent M 125	4 13/16"	8 7/16"	9 9/16"	9 5/16"	18 11/16"
TT Silent M 150	5 13/16"	9 3/4"	10 13/16"	10 1/4"	22 13/16"
TT Silent M 200	7 13/16"	11 9/16"	15 3/16"	11 5/8"	20 7/16"
TT Silent M 250	9 3/4"	14 1/8"	17 1/2"	14 3/16"	25 3/16"
TT Silent M 315	12 5/16"	17	20 1/2"	17 1/16"	31 7/8"

TT Silent M 100
TT Silent M 125
TT Silent M 150



TT Silent M 200
TT Silent M 250
TT Silent M 315



Performance

Model	Duct dia	Speed	RPM*	Sones	Watts*	Amps*	CFM vs. Static Pressure (Ps) in WG										Volts	
							0	0.1	0.2	0.3	0.4	0.5	0.6	0.7	0.8	0.9		1
							TT Silent M 100	4"	high	2363	1.2	28	0.24	128	113	97		76
TT Silent M 125	5"	high	2303	0.9	35	0.3	188	174	158	130	94	60	30	0	-	-	-	120 V / 60 Hz
TT Silent M 150	6"	high	2570	2.0	67	0.55	327	314	299	284	266	245	224	190	140	89	48	120 V / 60 Hz
TT Silent M 200	8"	high	2303	2.0	111	0.93	473	455	432	405	379	352	313	274	221	155	89	120 V / 60 Hz
TT Silent M 250	10"	high	2570	4.0	200	1.68	880	874	866	858	850	842	832	821	794	751	708	120 V / 60 Hz
TT Silent M 315	12 3/8"	high	2570	3.5	353	2.95	1050	1026	999	971	942	914	884	853	823	794	764	120 V / 60 Hz
		low	1847	2.0	236	1.95	830	804	770	726	682	638	581	524	464	399	335	

* The parameters RPM, Watts, Amps are indicated at 0.2 in WG static pressure.

Specification

Voltage: **120 V / 60 Hz**

Motor: **single-phase asynchronous two speed motor**

Duct compatibility: **Ø 4", 5", 6", 8", 10", 12^{3/8}"**

Airflow capacity: **up to 1050 CFM**

Sones: **0.3 – 4.0**

Power consumption: **22 – 353 W**

Suitable for working airstreams up to 140 °F

IPX4 protection

Thermal overload protection

Power cord included

Five year warranty

Contacts

Tel: 888-640-0925

513-348-3853

Fax: 513-268-4597

Sales@ventsus.com

VentsUS.com

11013 Kenwood Road, Cincinnati, Ohio 45242

VENTS-US reserves the rights to modify any of its products features, designs, components, and specifications at any time and without notice to maintain the development and quality of manufactured goods.

