



### DESCRIPTION

VKP fans are specially designed for extract and input ventilation and are perfect air movement solution for areas with tight spaces. It provides small to medium airflow. The fans offer a variety of choices of extract and input ventilation options and enables ducting from multiple sources. Suitable for working airstreams 13-140 °F. Power cord included.

IPX4 Protection / Thermal Overload Protection.  
Five year warranty.

### CASING

The fan's housing is made of galvanized steel. VKP 125/125\*2 and VKP 150/150\*2 models are available with two inlets.

### MOTOR

The external rotor motor on ball bearings and the backward curved, balanced impeller is suitable for high pressure application, prevent vibration and assure quiet operation.

### SUITABLE FOR:

General purpose ventilation and dryer exhaust application.

### DIMENSIONS

Model	Measurements [in.]						Figure
	ØD	ØD1	A	L	B	H	
VKP 100	4"	4"	19 31/64"	13 7/8"	9 7/8"	6 3/8"	1
VKP 125	5"	5"	19 31/64"	16 3/16"	12 3/16"	7 1/2"	1
VKP 150	6"	6"	19 19/64"	18 3/16"	15 7/16"	7 1/2"	1
VKP 125/125*2	5"	5"	19 19/64"	16 3/16"	12 3/16"	7 1/2"	2
VKP 150/150*2	6"	6"	19 19/64"	18 3/16"	15 7/16"	7 1/2"	2


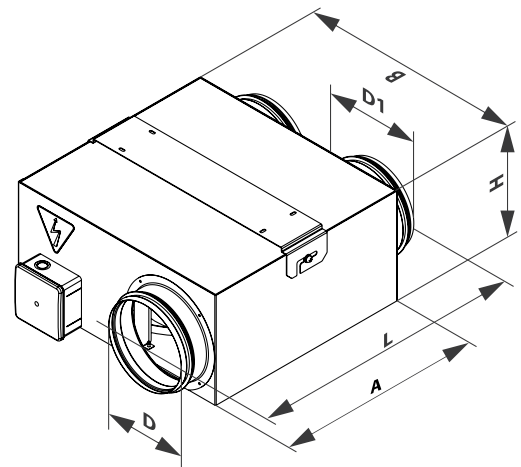


Fig. 1  
Inline dryer  
booster fan




Fig. 2  
Twin  
intake fan

Tel: 888-640-0925  
513-348-3853  
Fax: 513-268-4597

Sales@ventsus.com  
VentsUS.com  
11013 Kenwood Road,  
Cincinnati, Ohio 45242





**VKP**

**PRODUCT SPECIFICATIONS**

**TECHNICAL DATA**

**CENTRIFUGAL FAN**

**PERFORMANCE**

Model	Duct dia	Watts*	Amps*	CFM vs. Static Pressure (Ps) in WG											Max. Ps	Volts / Hz
				0"	0.1"	0.2"	0.3"	0.4"	0.5"	0.6"	0.7"	0.8"	0.9"	1"		
VKP 100	4"	30	0.27	104	98	94	89	84	77	69	61	52	43	33	1.2	120 / 60
VKP 125	5"	66	0.54	220	214	208	202	196	190	184	178	172	160	150	2.4	120 / 60
VKP 125/125*2	5" / 5"	74	0.61	244	234	223	213	204	194	183	170	160	150	140	1.9	120 / 60
VKP 150	6"	101	0.82	300	292	283	274	266	257	248	238	229	219	210	3.0	120 / 60
VKP 150/150*2	6" / 6"	119	1	360	348	332	316	302	289	272	259	245	323	220	3.0	120 / 60

\* Indicated at 0.2 in.W.G.

MODEL	QUANTITY	COMMENTS	PROJECT
			location:
			architect:
			engineer:
			contractor:
			submitted by:

Tel: 888-640-0925      Sales@ventsus.com  
 513-348-3853          VentsUS.com  
 Fax: 513-268-4597      11013 Kenwood Road,  
 Cincinnati, Ohio 45242

