


3PATW14002

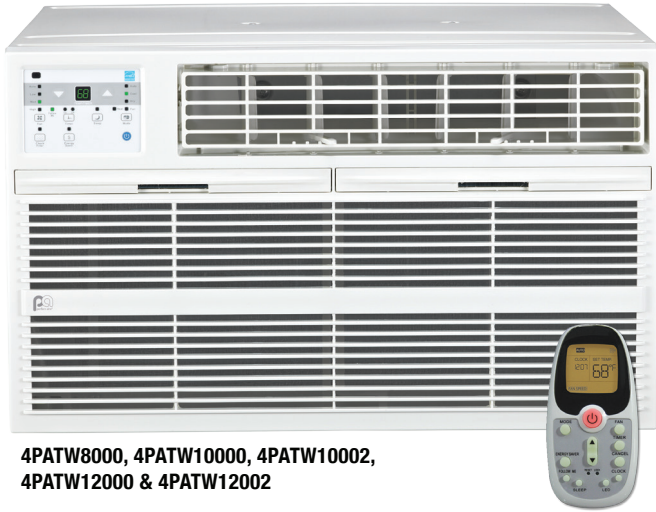

4PATW8000, 4PATW10000, 4PATW10002,
4PATW12000 & 4PATW12002

8K, 10K, 12K, 14K BTU THRU-THE-WALL AC FEATURES

- Electronic controls
- Full range air direction control
- Temperature output range of 62°F–86°F (17°C–30°C)
- Auto, Sleep, Dry & Energy Saver modes
- Full function remote control
- 24 hour timer
- Auto restart function
- Slide-out filter access



FOLLOW ME
Portable remote control thermostat feature for total room coverage

THRU-THE-WALL ACS

| | ENERGY STAR | | | | | NON-ENERGY STAR |
|--------------------------------------|---|---|---|---|---|--|
| | 4PATW8000 | 4PATW10000 | 4PATW10002 | 4PATW12000 | 4PATW12002 | 3PATW14002 |
| UPC CODE | 8-42149-02564-9 | 8-42149-02565-6 | 8-42149-02566-3 | 8-42149-02567-0 | 8-42149-02568-7 | 8-42149-02569-4 |
| COOLING CAPACITY (Btu) | 8,000 | 10,000 | 10,000/9,800 | 12,000 | 12,000/11,700 | 14,000/13,600 |
| COVERAGE (sq. ft.) | 300–350 | 400–450 | 400–450 | 450–550 | 450–550 | 550–700 |
| EER | 10.6 | 10.6 | 10.6 | 10.5 | 10.5 | 9.3/9.5 |
| ENERGY STAR RATED | Yes | Yes | Yes | Yes | Yes | No |
| FAN SPEEDS (Cool/Fan) | 3/3 | 3/3 | 3/3 | 3/3 | 3/3 | 3/3 |
| AMPS | 7.0 | 8.3 | 4.5/4.8 | 10.0 | 5.2/5.6 | 6.9/7.5 |
| WATTS | 754 | 943 | 943/924 | 1,142 | 1,142/1,114 | 1,505/1,431 |
| DECIBELS (Hi/Mi/Lo) | 57/54/52 | 57/55/53 | 58/56/54 | 61/59/57 | 61/59/57 | 61/60/59 |
| INTERIOR TRIM KIT INCLUDED | Yes | Yes | Yes | Yes | Yes | Yes |
| FITS STANDARD WALL SLEEVES | Yes (sold separately) | Yes (sold separately) | Yes (sold separately) | Yes (sold separately) | Yes (sold separately) | Yes (sold separately) |
| UNIT DIMENSIONS (WxHxD) (in.) | 24 ^{1/4} x 14 ^{1/2} x 20 ^{1/2} | 24 ^{1/4} x 14 ^{1/2} x 20 ^{1/2} | 24 ^{1/4} x 14 ^{1/2} x 20 ^{1/2} | 24 ^{1/4} x 14 ^{1/2} x 20 ^{1/2} | 24 ^{1/4} x 14 ^{1/2} x 20 ^{1/2} | 24 x 14 ^{1/2} x 20 ^{1/2} |
| PKG. DIMENSIONS (WxHxD) (in.) | 28 x 17 x 26 ^{3/4} | 28 x 17 x 26 ^{3/4} | 28 x 17 x 26 ^{3/4} | 28 x 17 x 26 ^{3/4} | 28 x 17 x 26 ^{3/4} | 28 x 17 x 26 ^{3/4} |
| STUFFING QTY. (20/40/40' HQ) | 120/255/306 | 120/255/306 | 120/255/306 | 120/255/306 | 120/255/306 | 120/255/306 |
| WEIGHT (Net/Gross) (lbs.) | 65/76 | 68/80 | 69/80 | 76/87 | 78/89 | 78/89 |
| REFRIGERATION | R410A | R410A | R410A | R410A | R410A | R410A |
| OUTLET CONFIGURATION | 15 AMP 115V | 15 AMP 115V | 15 AMP 230V | 15 AMP 115V | 15 AMP 230V | 15 AMP 230V |