


2019 KALEA Bay Fireplace







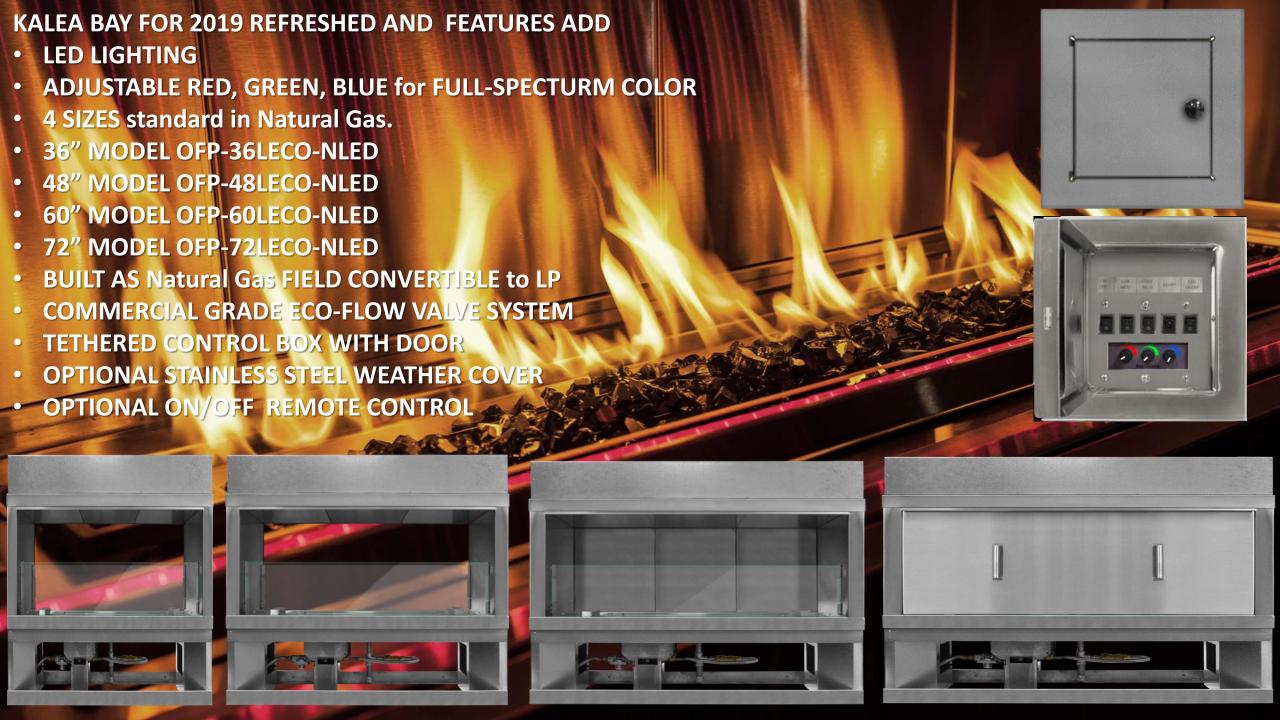

KALEA BAY

















304 Stainless 6"x12" flat vents provided



CONTROL CENTER has 6' lead allowing it to be installed into side wall of on site built enclosure

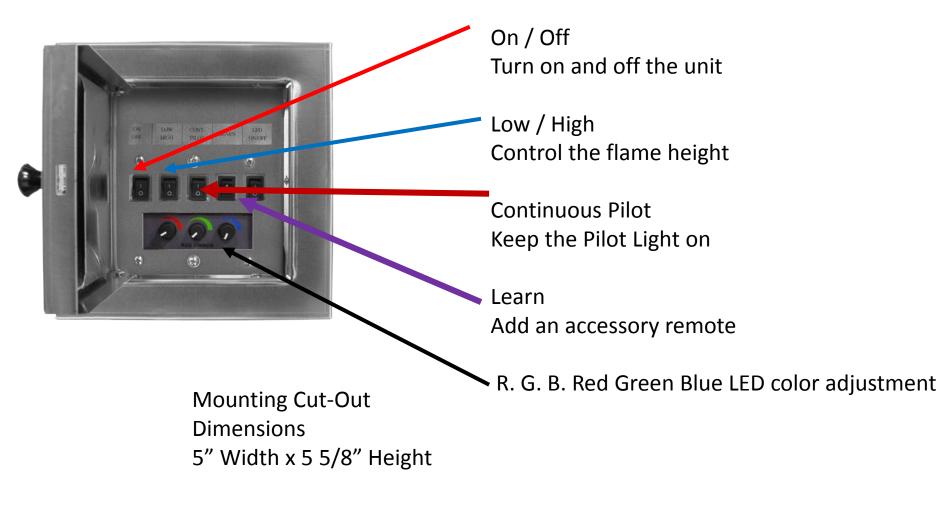






Electrical Power is needed to operate the fireplace

Step 1: Install the GFCI outlet double gang junction box with a weatherproof cover on the opposite side of the inlet gas supply.

NOTE: This is not a requirement; however, with the gang box on the opposite side of inlet will create more room for LED installation.

Figure 16 shows GFCI gang box installed. The electric junction box (GFCI) with a weatherproof cover must be installed in the shaded area shown below. Ensure the j-box is close to the floor area where the fireplace is sitting and not touching the burner pan.

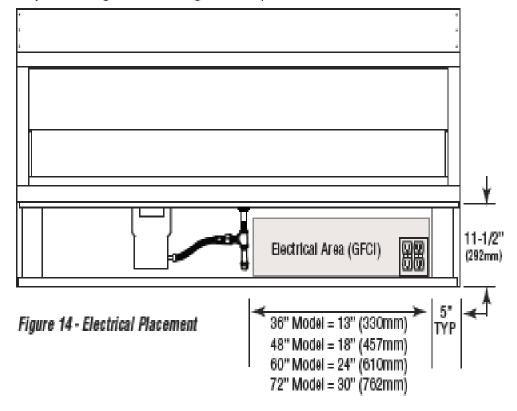




Figure 16 - Show GFCI box mounted in fireplace

Broken Glass will need to be purchased for the correct operation of the units.


FIREPLACE Model # Cover the Entire Burner tube in Trough area Only


• OFP-36LECO-NLED 15lbs (3-5# bag)

• OFP-48LECO-NLED 20lbs (4-5# bag)

• OFP-60LECP-NLED 25lbs (5-5# bags)

• OFP-72LECO-NLED 30lbs (30-5# bags)



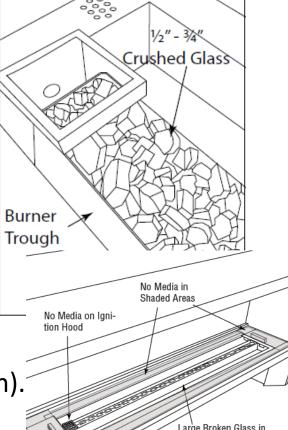

Media specifications. The Kalea Bay Requires Firegear glass

• Burner Trough (Cover the Entire burner tube in the pan filling the trough).

- Model GL ½"-¾" large broken glass
- Or Model GLR ½"-¾" large reflective glass
- Use the tables in the manual to assist in determining the amount of media needed for your specific model

OPTIONAL ACCESSORIES

You can easily convert your Kalea Bay into a see-through unit with one of our See-Through Conversion Kits.

See Through conversion Kits.

PART NUMBERS:

73230 36" Glass Windshield + Stainless Steel Hood 74230 48" Glass Windshield + Stainless Steel Hood 75230 60" Glass Windshield + Stainless Steel Hood 76230 72" Glass Windshield + Stainless Steel Hood



304 stainless Weather cover is made for all sizes. Need to purchase two for see through unit applications

PART # 36" unit OFP-36CVO / 48" unit OFP-48COV / 60" unit OFP-60COV / 72" unit OFP-72COV



"GL" Broken Glass 7 colors available



"GLR" Reflective
5 colors available



PART# PAVER-VENT-4LNTS Stainless vents for 4" block



PART# PAVER-VENT-6LNTS Stainless vents for 6" block