



Submittal Data: CONS09HP230V1AF 9,000 BTU/H Mini Floor Console Unit

Job Name	Location	Date
Purchaser	Engineer	
Submitted To	For	<input type="checkbox"/> Reference <input type="checkbox"/> Approval <input type="checkbox"/> Construction
Unit Designation	Schedule No.	

GENERAL FEATURES

- Quiet Operation -Multi-Speed Fan
- Swing Louvers
- Wireless Remote Controller
- Remote Control Lockout
- Limited 5 yr. Parts Warranty



System Ratings

Cooling*	
Rated Capacity	8,874 BTU/H
Heating*	
Rated Capacity	9,556 BTU/H
Sound Pressure (Hi/Lo)**	
Cooling	40/25 dbA
Heating	40/25 dbA
Air Flow (max)	
Indoor Fan	294 CFM

Physical Specifications

Unit Dimensions (LxHxD)	27.5 x 24.0 x 8.5 -in 700 x 600 x 215-mm
Weight (Net/Shipping)	33/40 LBS
Drain Size (OD)	0.67-in 17-mm

Electrical Ratings

Fan Motor	
Output Power	30 W
FLA	0.36 A
Power Supply	
Normal Operational Voltage	208/230 V, 1 Phase, 60 Hz
Voltage Range	187 - 253 V
MCA	1.0 A
Interconnecting Cable Wire Size	14-4 AWG

Refrigerant Piping Data


Refrigerant Type	R410A
Gas Pipe Size (OD)	3/8-in
Liquid Pipe Size (OD)	1/4-in
Connection Method	Flared

* Test conditions are based on AHRI 210/240.
**Sound Power ratings are per AHRI 270 and AHRI 350



9,000 BTUH MODEL


Model # CONS09HP230V1AF 9,000 BTUH 230V

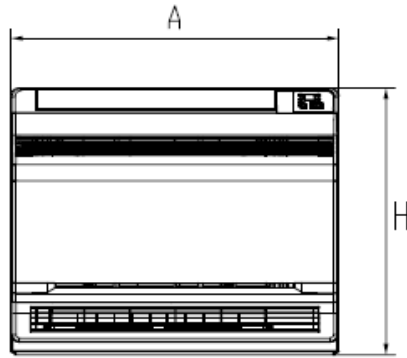

Front



Side

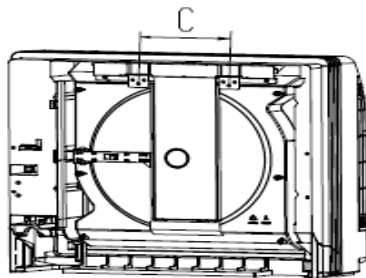


Back

Dimensions

	A	B	C	H
(mm)	700	215	200	600
(inches)	27.6	8.5	7.875	23.6

Note: Size refrigerant lines based on evaporator port sizes.

MINIMUM & MAXIMUM CLEARANCES

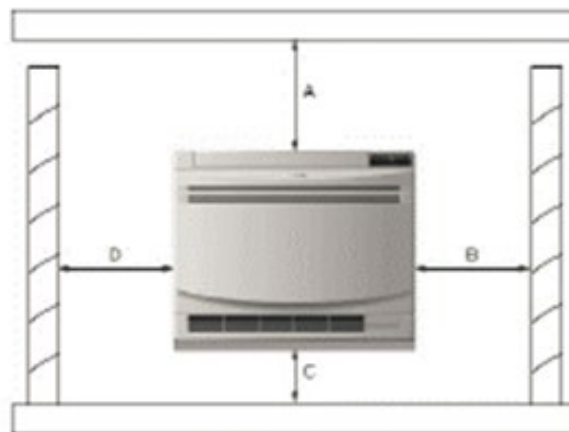

CLEARANCES			
MIN	MIN	MAX	MIN
A	B	C	D
60 (1524)	24 (610)	6 (152)	24 (610)

Notes:

1. Recommended Interconnecting Cable Type Stranded Bare Copper Conductors THHN 600V Unshielded Wire
2. Power wiring cable size must comply with applicable national and local codes.
3. Test conditions are based on AHRI 210/240.



Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs without notice or without incurring obligations. All rights reserved.