


RVF Series

Exterior-Mount Fan

STANDARD FEATURES

- Galvanized steel housing with powder coat finish
- Powered by external rotor motorized impeller
- Permanently lubricated sealed ball bearings
- 100% speed controllable
- Automatic reset thermal overload protection

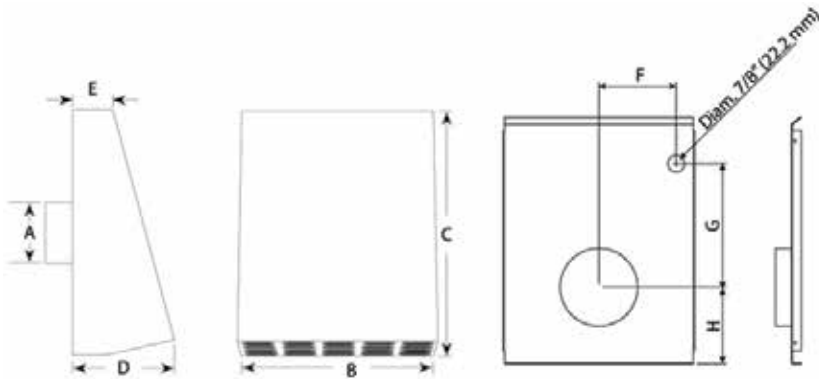

Model	A	B	C	D	E	F	G	H	Metal Gauge	Weight
RVF 4'	3 7/8	10 1/4	13	6	2 3/4	4 3/32	6 1/2	4 1/16	20	8
RVF 4XL	3 7/8	10 1/4	13	6	2 3/4	4 3/32	5 1/4	5 1/4	20	10
RVF 6	5 7/8	10 1/4	13	6	2 3/4	4 3/32	5 1/4	5 9/32	20	10
RVF 6XL	5 7/8	14 1/4	17	6	2 3/4	6 1/16	7 3/8	7 1/16	20	14
RVF 8XL	7 7/8	14 1/4	17	6	2 3/4	6 1/16	7 9/8	7 1/16	20	14

All dimensions in inches. Weights in pounds.
¹ Model is Energy Star® qualified.

Fan Specifications							Motor Specifications				
Line	Qty	Model No.	Tag	CFM	SP	Fan RPM	Watts	Volts	Phase	Hertz	Encl
1											
2											
3											
4											

Accessory Items	1	2	3	4	Accessory Items	1	2	3	4
<input type="checkbox"/>					<input type="checkbox"/>				
<input type="checkbox"/>					<input type="checkbox"/>				
<input type="checkbox"/>					<input type="checkbox"/>				
<input type="checkbox"/>					<input type="checkbox"/>				

Project: _____ Submitted: _____
 Customer: _____ Approved: _____
 Location: _____

United States 10048 Industrial Blvd. • Lenexa, KS 66061 • 1.800.747.1762 • www.fantech.net
Canada 50 Kanalfakt Way • Bouctouche, NB E4S 3M5 • 1.800.565.3548 • www.fantech.net

Fantech reserves the right to make technical changes.
 For updated documentation please refer to www.fantech.net

