


Project Name:			
Location:		Approval:	
Engineer:		Approval: Date:	
Submitted to:			
		Construction:	
Submitted by:		Unit #:	
Reference:		Drawing #:	
Performance			
Indoor Unit Model No:	FTQ42PBVJU	Indoor Unit Type: Vertical A	ir Handler (and Horizontal R)
Outdoor Unit Model No:	RZQ42PVJU9	Condensing Unit Type:	SkyAir Heat Pump
Rated Cooling Capacity (Btu/hr):	40000		Indoor: 80°F DB/67°F WB
Sensible Capacity (Btu/hr):	27900	Rated Cooling	Outdoor: 95°F DB/75°F WB
Max/Min Cooling Capacity (Btu/hr / kW):	N/A/N/A	Conditions	Catacon. 60 1 22/76 1 112
Cooling Input Power (kW):	3.59		Indoor: 70°F DB/60°F WB
SEER:	17	Rated Heating	Outdoor: 47°F DB/43°F WB
Rated Heating Capacity (Btu/hr):	47000	Conditions	Outdoor: +1 1 DB/+0 1 VVB
	N/A/N/A	Rated Piping Length(ft)	25
Max/Min Heating Capacity (Btu/hr / kW):		Rated Height Separation(ft)	0
Heating Input Power (kW):	4.3	nated Height Separation(it)	0
Heating COP (Btu/hr / Btu/hr):	3.2		
HSPF:	9		
Indoor Unit Details			
Power Supply (V/Hz/Ph:)	208-230/60/1ph	Airflow Rate (CFM wet coil)	1400/1190/980
Power Supply Connections:	L1, L2, Ground	Moisture Removal (pt/h):	
Min Circuit Amps MCA (A):	3.6	Gas Pipe Connection (inch):	5/8
Max Overcurrent Amps MFA (A):	15	Liquid Pipe Connection (inch):	
Dimensions (HxWxD):	58-1/4x22x26	Condensate Connection (inch)	
Panel (HxWxD):	N/A	Sound Pressure Level (dBA):	,, <u> </u>
Net Weight (lbs):	203	Sound Power Level (dBA):	
Weight with Panel (lbs):	200	Static Pressure Rated/Max (in	Wg) 0.5 / 0.5/0.5
worght with ranor (1869).		Class Trocours Tlatourman (III	11g) 0.0 / 0.0/0.0
Condensing Unit Details			
Power Supply (V/Hz/Ph):	208-230/60	Compressor Type:	Inverter
Power Supply Connections:	L1, L2, Ground	Capacity Control Range (%):	30 - 100
Min. Circuit Amps MCA (A):	27	Airflow Rate (CFM):	3740
Max. Overcurrent Amps MFA (A):	30	Gas Pipe Connection (inch):	5/8
Max. Starting Current MSC(A):		Liquid Pipe Connection (inch):	3/8
Rated Load Amps RLA (A):	19.6	Sound Pressure Level (dBA):	58
	6x35-7/16x12-5/8	Sound Power Level (dBA):	
Net Weight (lbs):	283		
Occiona Batalla			
System Details	B 4461	Ma Distant de de des	10.0
Refrigerant Type:	R-410A	Max. Pipe Length (Vertical ft):	164 ft
Holding Refrigerant Charge (lbs):	8.8	Cooling Operation Range (%)	
Additional Charge (oz/ft):	install data	Cooling Range w/Baffle (°F):	0 - 115
Pre-charge Piping (Length ft):	_	Heating Operation Range (°F)	
Max. Pipe Length (Total ft):	230 ft	Heating Range w/Baffle (°F):	0 - 77




Project Name:	
Location:	Approval:
Engineer:	Date:
Submitted to:	Construction:
Submitted by:	Unit #:
Reference:	Drawing #:

### **Dimensional Drawing - Indoor Unit**

FTQ42PBVJU

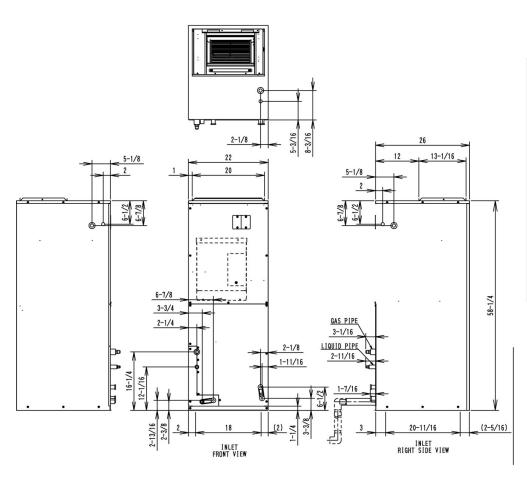

### FTQ30/36/42PBVJU Unit: Inches

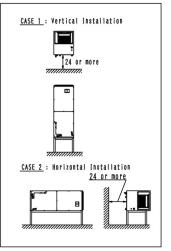




Project Name:	
Location:	Approval:
Engineer:	Date:
Submitted to:	Construction:
Submitted by:	Unit #:
Reference:	Drawing #:

### **Dimensional Drawing - Condensing Unit**

RZQ42PVJU9

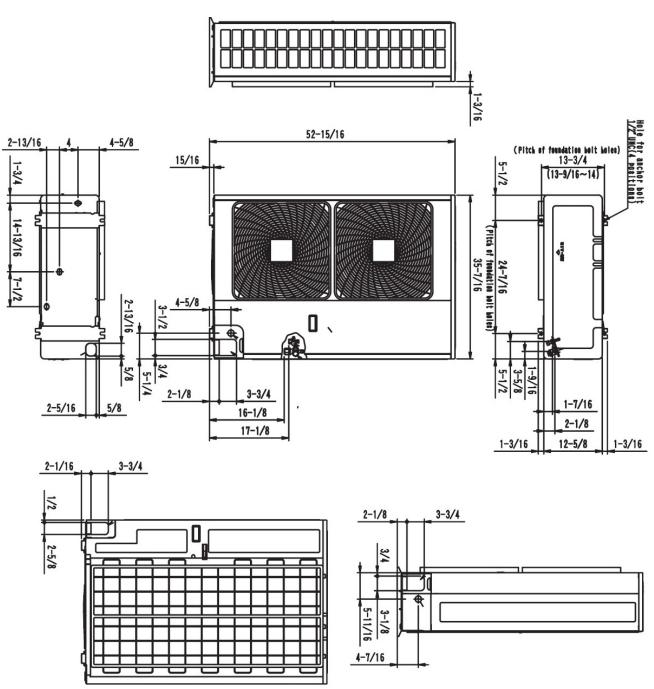




Project Name:	
Location:	Approval:
Engineer:	Date:
Submitted to:	Construction:
Submitted by:	Unit #:
Reference:	Drawing #:



# FTQ42PBVJU Std U.S. Warranty: 7yrs Compressor, 5yrs Parts

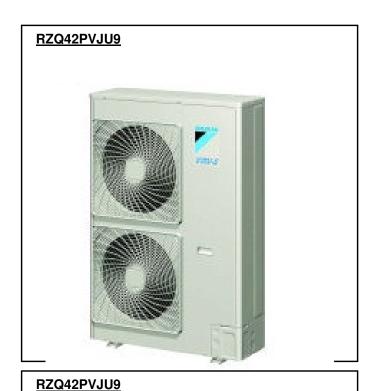

# Std U.S. Warranty: 7yrs Compressor, 5yrs Parts