

High Wall Heat Pump Ductless System

Indoor Model: 45MAHAQ33XA3



Turn to the experts

Job Data:

Tag #:

Date:


Location:

Carrier#:



- INDOOR STANDARD FEATURES**
- Modes: Cool, Heat, Dry, Fan, Auto
  - Four fan speeds
  - Sleep Mode
  - Turbo Mode
  - Follow Me (senses temperature at handheld remote)
  - Auto-Restart function
  - Quiet indoor operation
  - Anti-corrosive fin coating
- RESIDENTIAL APPLICATION LIMITED WARRANTY\***
- Ten (10) years if properly registered within ninety (90) days after original installation, parts are warranted to the original purchaser for a period of ten (10) years. Otherwise, parts warranty is five (5) years.

NOTE: Images for illustration purposes only. Actual models may be slightly different.

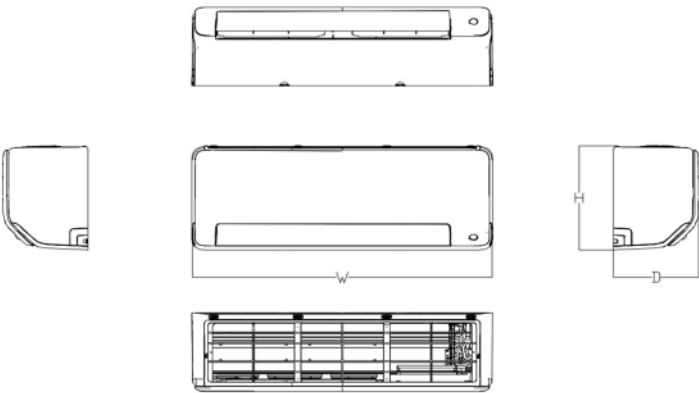

| INDOOR UNIT DIMENSIONS |      |       |       |       |
|------------------------|------|-------|-------|-------|
| Capacity               | Unit | W     | D     | H     |
| 6K/9K/12K              | mm   | 795   | 225   | 295   |
|                        | inch | 31.3  | 8.86  | 11.61 |
| 18K                    | mm   | 965   | 239   | 319   |
|                        | inch | 37.99 | 9.41  | 12.56 |
| 24K ~ 36K              | mm   | 1140  | 275   | 370   |
|                        | inch | 44.88 | 10.83 | 14.57 |



| 45MAHAQ33XA3    |                                                |                                     |                                   |
|-----------------|------------------------------------------------|-------------------------------------|-----------------------------------|
| System          | Indoor Model #                                 |                                     | 45MAHAQ33XA3                      |
|                 | Indoor Size                                    |                                     | 33000                             |
| Electrical      | Voltage, Phase, Cycle                          | V/Ph/Hz                             | 208/230-1-60                      |
|                 | Power Supply                                   | Indoor unit powered by outdoor unit |                                   |
|                 | MCA                                            | A.                                  | 3                                 |
| Operating Range | Cooling Indoor DB Min - Max                    | *F(*C)                              | 60~90(16~32)                      |
|                 | Heating Indoor DB Min - Max                    | *F(*C)                              | 32~86(0~30)                       |
| Indoor Coil     | Face Area                                      | Sq. Ft.                             | 3.6                               |
|                 | No. Rows                                       |                                     | 3                                 |
|                 | Fins per inch                                  |                                     | 20                                |
|                 | Circuits                                       |                                     | 7                                 |
| Indoor Unit     | Number of Fan Speeds                           |                                     | 1050/880/630                      |
|                 | Airflow (highest to lowest)                    | CFM                                 | 882.9 / 635.7 / 506.2 / 382.6 / / |
|                 | Sound Pressure (highest to lowest)             | dB(A)                               | 53.0/45.5/40/30.5/19.5            |
|                 | Moisture Removal                               | L/h                                 | 4                                 |
|                 | Air Throw Data                                 | ft(m)                               | 30.1(9.18)                        |
| Dimensions      | Height                                         | in (mm)                             | 14.57(370)                        |
|                 | Width                                          | in (mm)                             | 44.88(1140)                       |
|                 | Depth                                          | in (mm)                             | 10.83(275)                        |
|                 | Net Weight                                     | lbs (kg)                            | 43.21(19.6)                       |
|                 | Shipping Height                                | in (mm)                             | 13.98(355)                        |
|                 | Shipping Width                                 | in (mm)                             | 48.43(1230)                       |
|                 | Shipping Depth                                 | in (mm)                             | 17.91(455)                        |
|                 | Shipping Net Weight                            | lbs (kg)                            | 55.78(25.3)                       |
| CONTROLS        |                                                |                                     |                                   |
| Standard        | Wireless Remote Controller (*F/*C Convertible) |                                     |                                   |
| Optional        | Wired Remote Control 7 Day Programmable        |                                     | KSACN1401AAA                      |
|                 | Wired Remote Control with Timer Function       |                                     | KSACN1201AAA                      |
|                 | Wi-Fi™ Kit High Wall                           |                                     | KSAIF0701AAA                      |
|                 | 24V Mini Interface                             |                                     | KSAIC0601230                      |

