


FIT® 120E-D-EC-HC

Fresh Air Appliance (FAA/ERV)

Product #: 463411



FIT 120 E - D - EC - HC
Product Name CFM @ 0.4 in. w.g. Energy Recovery Damper Electronically Commutated Hard Connect

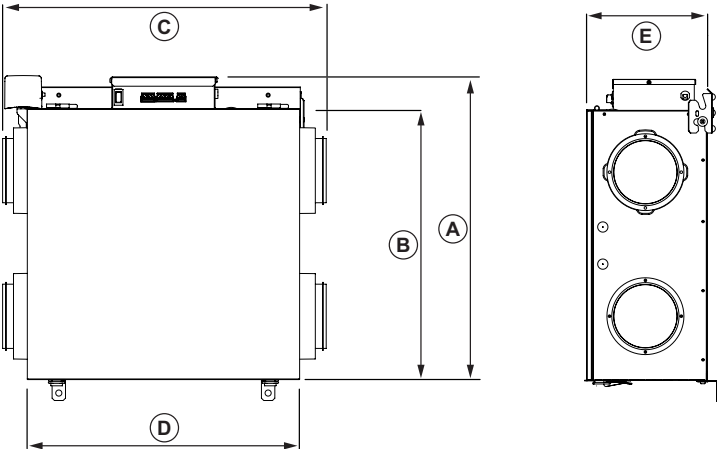

A		B		C		D		E	
in	mm	in	mm	in	mm	in	mm	in	mm
23 5/32	588	20 3/4	527	25	636	20 27/32	529	9 1/4	235

Clearances:
8 1/2 in. (216 mm.) in front of the product for removal of core.
2 3/8 in. (61 mm.) above the electrical box to do the wire connections.

STANDARD FEATURES

- Hard-connect system, no power cord provided
- Warm supply and return air on the right-hand side
- Average airflow: 129 cfm (61 L/s) @ 0.4 in. wg (100Pa)
- Compact design: 25 in. x 9 1/4 in. x 23 5/32 in. (636 mm x 235 mm x 588 mm)
- Lightweight: 35 lbs (16 kg) including core
- Electronically Commutated (EC) motors
- Mechanical shutoff damper
- Easy to install on ceiling or wall with mounting bracket included
- Energy recovery core
- Electrostatic filters (washable)
- No drain required
- Removable screw terminal for easy connection with external access
- Multiple speed operation
- Recommended Control: ECO-Feel® AUTO IAQ – Automatic IAQ Control

Fan Specifications							Motor Specifications								
Line	Qty	Model No.	Tag	CFM	SP	Fan RPM	Watts	Volts	Phase	Hertz	Insulation Class				
1											A				
2											A				
3											A				
Accessory Items				1	2	3	4	Accessory Items				1	2	3	4

Project: _____ Submitted: _____
Customer: _____ Approved: _____
Location: _____

United States 10048 Industrial Blvd. • Lenexa, KS 66215 • 1.800.747.1762 • www.fantech.net
Canada 50 Kanafllakt Way • Bouctouche, NB E4S 3M5 • 1.800.565.3548 • www.fantech.net

Fantech reserves the right to make technical changes.
For updated documentation please refer to www.fantech.net

