



Submittal Data Sheet

Indoor Unit Model#: ACiQ-60-ACL-B

Outdoor Unit Model#: ACiQ-48-EHPD

60K EVAPORATOR A-COIL & 48K STD. HEAT PUMP CONDENSER

Location:	Approval:
Engineer:	Date:
Submitted to:	Construction:
Submitted by:	Unit #:
Reference:	Drawing #:

System Product Code: 810175552798
A-Coil Product Code: 810175552682
Outdoor Unit Product Code: 810175550480



EFFICIENCY RATINGS			
Cooling		Heating	
SEER2	14.7	HSPF2-4	7.5
EER2	9.5	COP	2.75

COOLING PERFORMANCE	
Cooling (Btu/hr)	
Rated Capacity	45,000
Min/Max Capacity	15,500~47,000
Moisture Removal (L/h)	4
Standard Operating Range (°F/°C)	-13~122 (-25~50)
Rated Cooling Conditions:	Indoor: 80°F DB/67°F WB Outdoor: 95°F DB/75°F WB

HEATING PERFORMANCE	
Heating (Btu/hr)	
1. @ 47°F Rated	46,000
1. @ 47°F Min/Max Capacity	10,600~47,000
2. @ 17°F Rated	28,000
3. @ 5°F Rated: Capacity / COP	42,000 / 1.75
3. @ 5°F Max. Capacity	40,000
Standard Operating Range (°F/°C)	-13~75 (-25~24)
1. Rated Heating Conditions:	Indoor: 70°F DB/60°F WB Outdoor: 47°F DB/43°F WB
2. Rated Heating Conditions:	Indoor: 70°F DB/60°F WB Outdoor: 17°F DB/15°F WB
3. Heating Conditions*	Indoor: 70°F DB/60°F WB Outdoor: 5°F DB/5°F WB

*Compressor Operating at Max. Frequency

INDOOR UNIT SPECIFICATIONS		
Dimension (W×D×H)	inch	24-1/2 x 21 x 28
	mm	622 × 533 × 711
Package (W×D×H)	inch	27-3/4 x 26-1/8 x 30-3/8
	mm	705 × 665 × 770
Net/Gross Weight	lbs	81 / 92
	kg	36.8 / 41.9


OUTDOOR UNIT SPECIFICATIONS		
Compressor Type		ROTARY
Compressor Model		MTH550UKPC8FU
Refrigerant		R454B
Refrigerant Oil Charge (mL)		1,800
Refrigerant Oil		HAF68D1C
Outdoor Air Flow (Max) (CFM)		3,037
Outdoor Noise Level (dBA)		65
Dimension (W×D×H)	inch	38-9/16 x 16-3/8 x 38-3/8
	mm	980 × 415 × 975
Package (W×D×H)	inch	45-1/16 x 19-11/16 x 42-1/2
	mm	1145 × 500 × 1080
Net/Gross Weight	lbs	193 / 224
	kg	87.5 / 101.7

ELECTRICAL SPECIFICATIONS	
Indoor Power Supply	24V, 60Hz, 1Ph
Indoor MCA 115V/(208/230V)	N/A
Indoor MOP	N/A
Outdoor Power Supply	208/230, 60Hz, 1Ph
Outdoor MCA	36.0
Outdoor MOP	40.0
Communication Wiring	AWG 20-2
Compressor RLA	27
Outdoor Fan Motor RLA	2
Outdoor Fan Motor W	250
Indoor Fan Motor RLA	N/A
Indoor Fan Motor W	N/A
System Power Input @ Cooling (W)	4,736 (1,430~5,050)
System Power Input @ Heating (W)	4,910 (1,400~5,010)
MCA: Min. circuit amps (A)	MOP: Max. overcurrent protection (A)
RLA: Rated load amps (A)	W: Fan motor rated output (W)

REFRIGERANT PIPING SPECIFICATIONS	
Throttle type (Indoor)	EXV
Throttle type (Outdoor)	EXV
Liquid Size	3/8" (9.52mm)
Gas Size	3/4" (19mm)
Max. Piping Length (ft/m)	246 (75)
Max. Height Difference (ft/m)	98.4 (30)
Max. Pre-charged Length (ft/m)	25 (7.5)
Refrigerant Pre-charged Amount (oz/kg)	134 (3.8)
Additional Charge of Refrigerant ((oz/ft)/(g/m))	0.7 (65)
Connection Method	Flared

INDOOR UNIT DIMENSIONS


Unit: inch (mm)

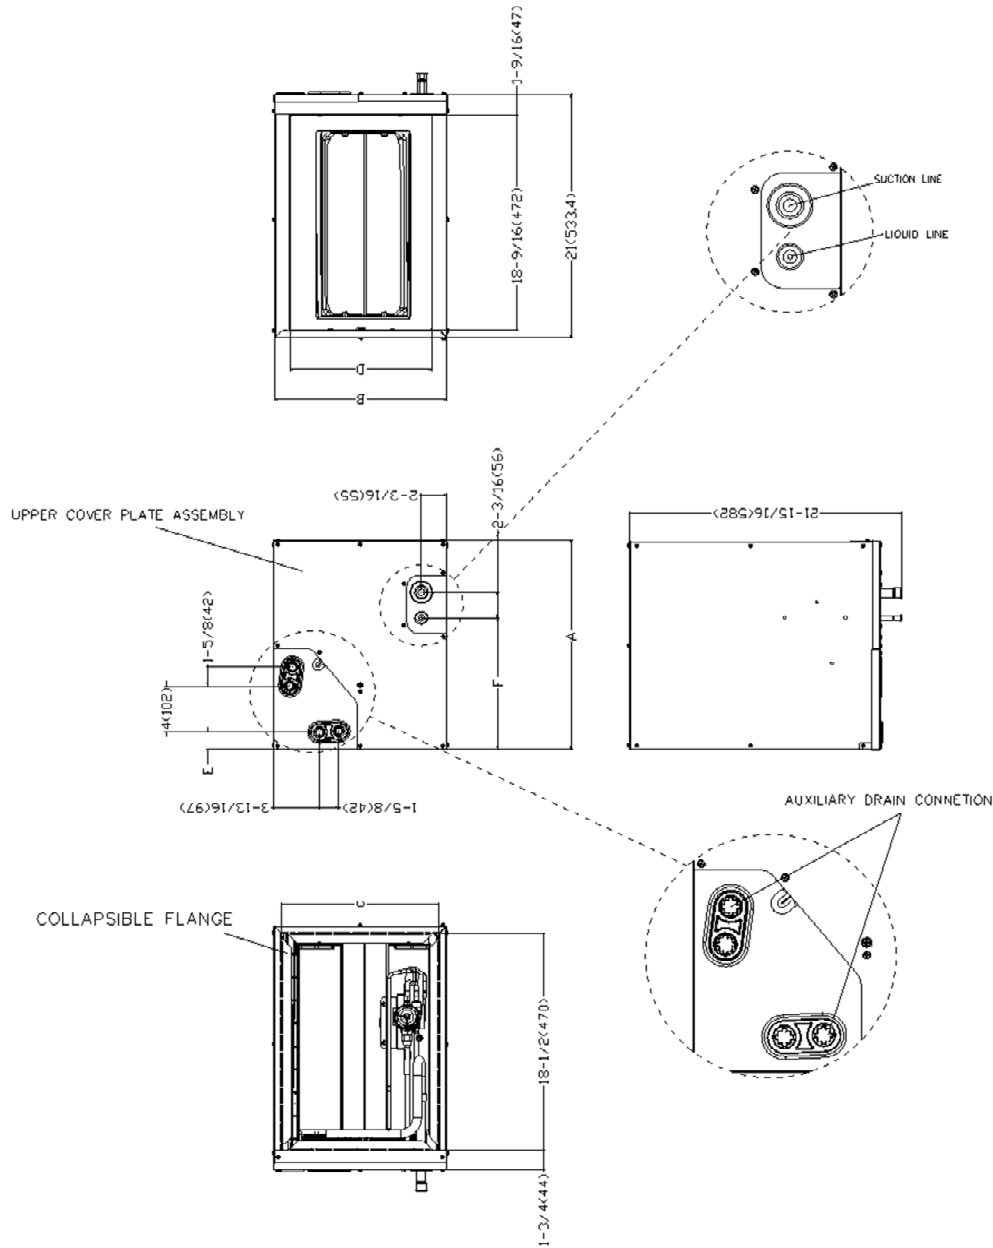


Model		ACiQ-24-ACL-B	ACiQ-24-ACL-14-B	ACiQ-36-ACL-B	ACiQ-36-ACL-17-B	ACiQ-48-ACL-B	ACiQ-60-ACL-B
		inch (millimeter)	inch (millimeter)	inch (millimeter)	inch (millimeter)	inch (millimeter)	inch (millimeter)
A	Unit Height	18 (457)	18 (457)	24 (611)	23-9/16 (599)	27-3/4 (706)	28 (711)
B	Unit Width	17-1/2 (445)	14-1/2 (368)	21 (534)	17-1/2 (445)	21-5/8 (549)	24-1/2 (622)
C	Supply Air Opening Width	16-3/16 (411)	13-1/4 (336)	19-3/4 (502)	16-3/16 (411)	21-1/4 (514)	23-1/4 (591)
D	Return Air Opening Width	14-15/16 (380)	11-15/16 (303)	19-1/2 (498)	14-15/16 (380)	20 (509)	23-1/8 (587)
E	Condensate Drain Height	1-7/16 (38)	1-7/16 (38)	2-3/16 (55)	1-7/16 (38)	2-1/8 (50)	2-3/16 (55)
F	Liquid Line Height	11-3/8 (290)	11-3/8 (290)	17-1/2 (445)	16-3/8 (417)	17-5/8 (449)	21-7/16 (545)

OUTDOOR UNIT DIMENSIONS

Unit: inch (mm)

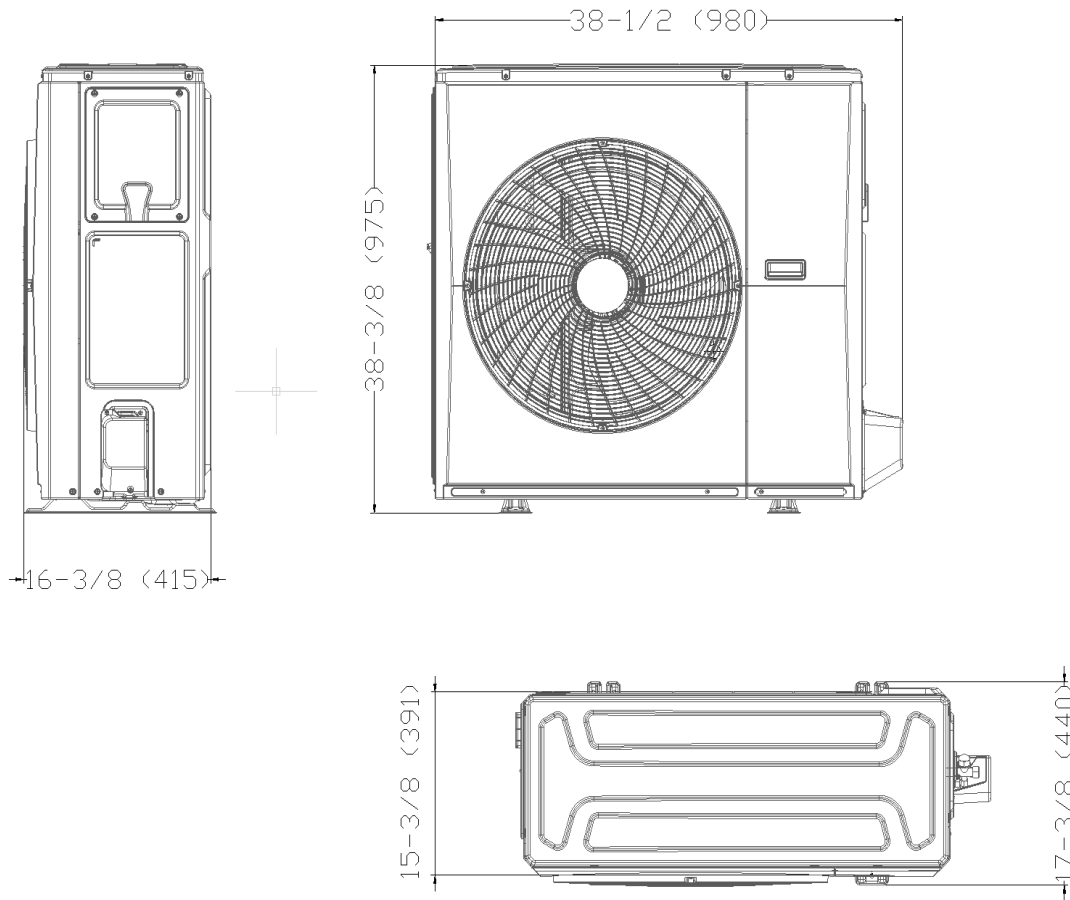

INSTALLATION INSTRUCTIONS FOR OUTDOOR UNIT

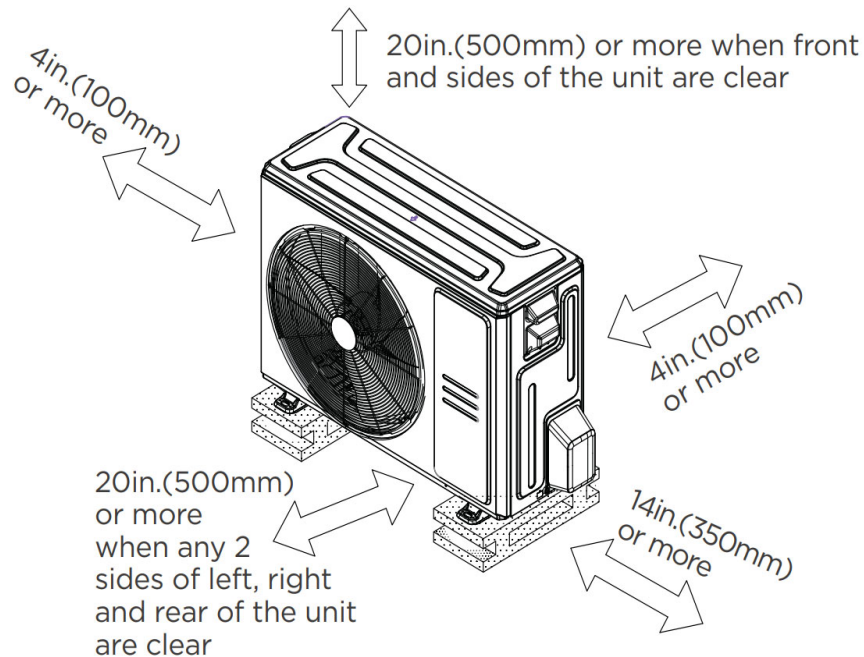

FEATURES

- Multi-position installation: horizontal (left or right), vertical (up or down)
- Aluminum Coil
- R454B refrigerant sensor
- Easy Maintenance
- Multiple control options available:
 - Two way communication wired controller with built-in WiFi:120N(X6W)
 - Third-Party 24V Thermostat