



Submittal Data Sheet

Indoor Unit Model#: ACiQ-60-ACL-B

Outdoor Unit Model#: ACiQ-60-HPD

60K EVAPORATOR A-COIL & 60K EXT. HEAT PUMP CONDENSER

Location:	Approval:
Engineer:	Date:
Submitted to:	Construction:
Submitted by:	Unit #:
Reference:	Drawing #:

System Product Code: 810175552927
A-Coil Product Code: 810175552682
Outdoor Unit Product Code: 810175550664



INDOOR UNIT SPECIFICATIONS

Dimension (W×D×H)	inch	24-1/2 x 21 x 28
	mm	622 × 533 × 711
Package (W×D×H)	inch	27-3/4 x 26-1/8 x 30-3/8
	mm	705 × 665 × 770
Net/Gross Weight	lbs	81 / 92
	kg	36.8 / 41.9

OUTDOOR UNIT SPECIFICATIONS

Compressor Type		TWIN-ROTARY
Compressor Model		ETPQ480D66UMU1
Refrigerant		R454B
Refrigerant Oil Charge (mL)		1300
Refrigerant Oil		VG75
Outdoor Air Flow (Max) (CFM)		2,649
Outdoor Noise Level (dBA)		64
Dimension (W×D×H)	inch	37-1/2 x 16-3/8 x 52-1/2
	mm	952 × 415 × 1333
Package (W×D×H)	inch	43-1/8 x 19-1/2 x 58-1/4
	mm	1095 × 495 × 1480
Net/Gross Weight	lbs	242 / 275
	kg	110.2 / 124.8

EFFICIENCY RATINGS

Cooling		Heating	
SEER2	14.5	HSPF2-4	8.1
EER2	8.8	COP	2.76

COOLING PERFORMANCE

Cooling (Btu/hr)	
Rated Capacity	53000
Min/Max Capacity	17,600~53,400
Moisture Removal (L/h)	8.5
Standard Operating Range (°F/°C)	-22~122 (-30~50)
Rated Cooling Conditions:	Indoor: 80°F DB/67°F WB
	Outdoor: 95°F DB/75°F WB

HEATING PERFORMANCE

Heating (Btu/hr)	
1. @ 47°F Rated	58,000
1. @ 47°F Min/Max Capacity	21,200~59,000
2. @ 17°F Rated	36,000
3. @ 5°F Rated: Capacity / COP	43000 / 1.83
3. @ 5°F Max. Capacity	43,000
Standard Operating Range (°F/°C)	-22~75 (-30~24)
1. Rated Heating Conditions:	Indoor: 70°F DB/60°F WB
	Outdoor: 47°F DB/43°F WB
2. Rated Heating Conditions:	Indoor: 70°F DB/60°F WB
	Outdoor: 17°F DB/15°F WB
3. Heating Conditions*	Indoor: 70°F DB/60°F WB
	Outdoor: 5°F DB/5°F WB

*Compressor Operating at Max. Frequency


ELECTRICAL SPECIFICATIONS

Indoor Power Supply	24V, 60Hz, 1Ph
Indoor MCA 115V/(208/230V)	N/A
Indoor MOP	N/A
Outdoor Power Supply	208/230, 60Hz, 1Ph
Outdoor MCA	40
Outdoor MOP	40
Communication Wiring	AWG 20-2
Compressor RLA	31
Outdoor Fan Motor RLA	1.2
Outdoor Fan Motor W	N/A
Indoor Fan Motor RLA	N/A
Indoor Fan Motor W	N/A
System Power Input @ Cooling (W)	6020 (1,520 ~ 6,040)
System Power Input @ Heating (W)	6,159 (1,580 ~ 6,750)
MCA: Min. circuit amps (A)	MOP: Max. overcurrent protection (A)
RLA: Rated load amps (A)	W: Fan motor rated output (W)

REFRIGERANT PIPING SPECIFICATIONS


Throttle type (Indoor)	EXV
Throttle type (Outdoor)	EXV
Liquid Size	9.52 mm (3/8 in)
Gas Size	19 mm (3/4 in)
Max. Piping Length (ft/m)	246 (75)
Max. Height Difference (ft/m)	98 (30)
Max. Pre-charged Length (ft/m)	24.6 (7.5)
Refrigerant Pre-charged Amount (oz/kg)	183.42 (5.2)
Additional Charge of Refrigerant ((oz/ft)/(g/m))	0.7 (65)
Connection Method	Flared

INDOOR UNIT DIMENSIONS

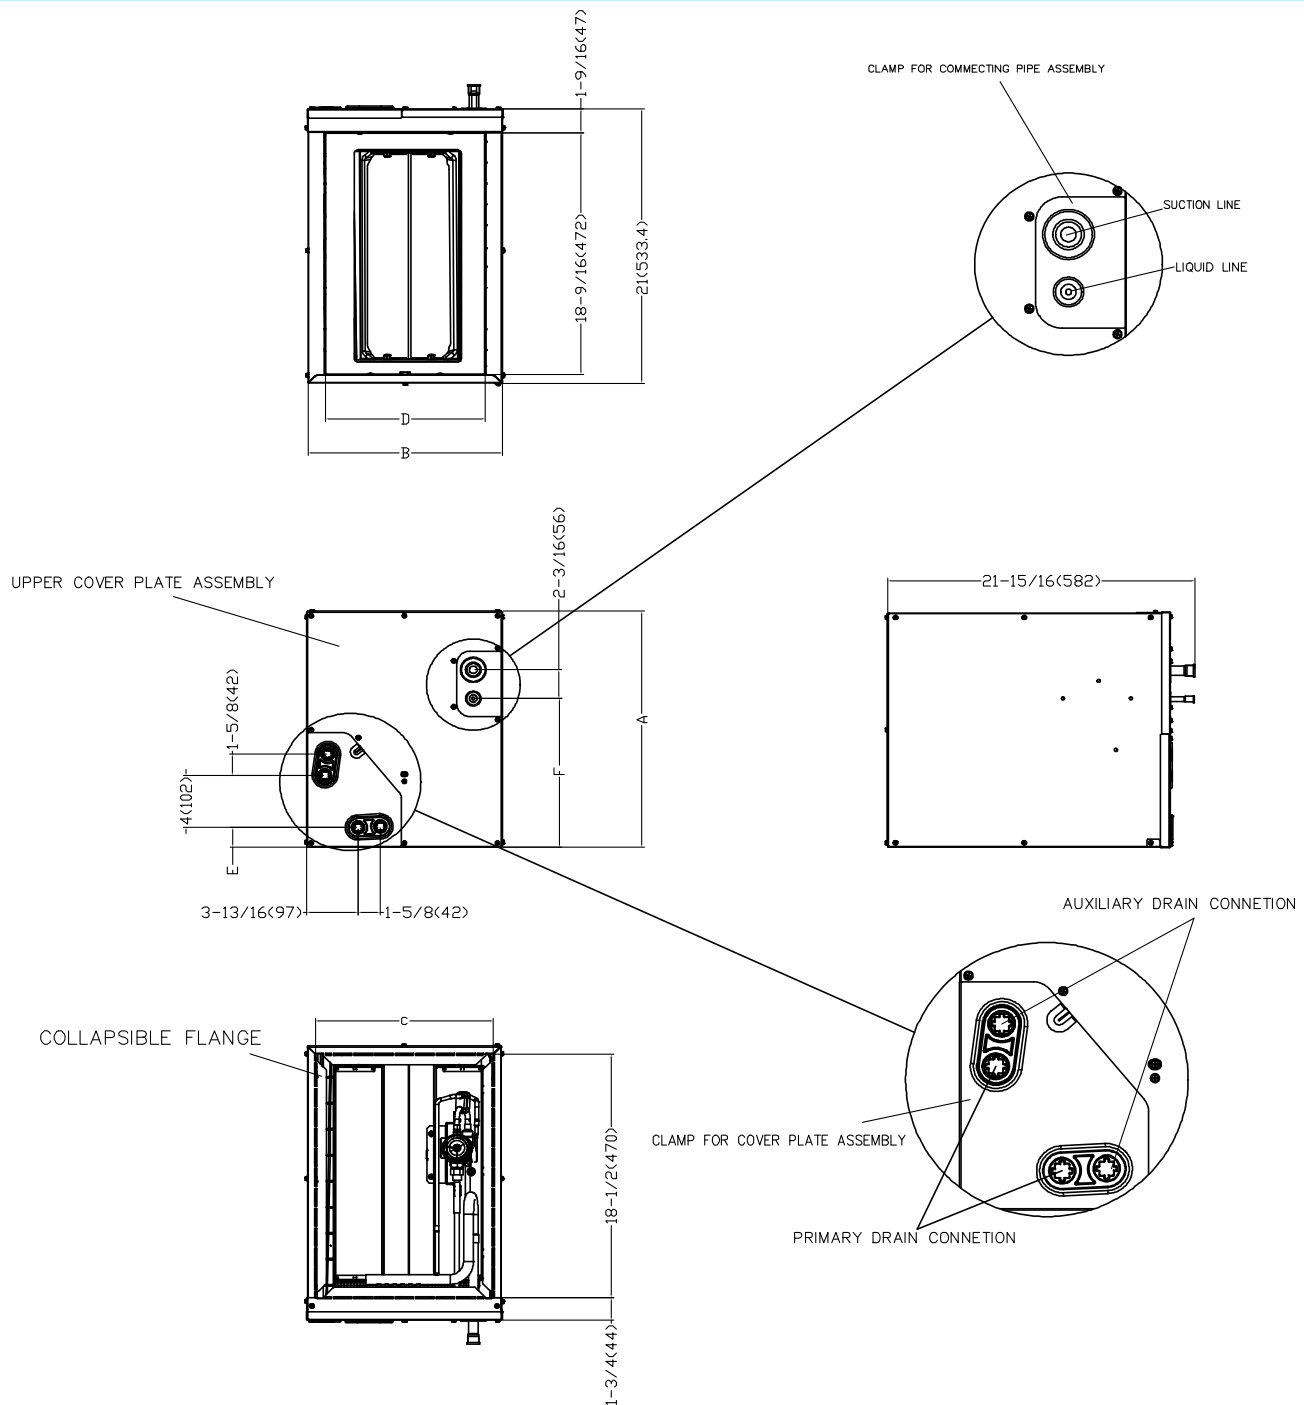


Model		ACiQ-24-ACL-B	ACiQ-24-ACL-14-B	ACiQ-36-ACL-B	ACiQ-36-ACL-17-B	ACiQ-48-ACL-B	ACiQ-60-ACL-B
		inch (millimeter)	inch (millimeter)	inch (millimeter)	inch (millimeter)	inch (millimeter)	inch (millimeter)
A	Unit Height	18 (457)	18 (457)	24 (611)	23-9/16 (599)	27-3/4 (706)	28 (711)
B	Unit Width	17-1/2 (445)	14-1/2 (368)	21 (534)	17-1/2 (445)	21-5/8 (549)	24-1/2 (622)
C	Supply Air Opening Width	16-3/16 (411)	13-1/4 (336)	19-3/4 (502)	16-3/16 (411)	21-1/4 (514)	23-1/4 (591)
D	Return Air Opening Width	14-15/16 (380)	11-15/16 (303)	19-1/2 (498)	14-15/16 (380)	20 (509)	23-1/8 (587)
E	Condensate Drain Height	1-7/16 (38)	1-7/16 (38)	2-3/16 (55)	1-7/16 (38)	2-1/8 (50)	2-3/16 (55)
F	Liquid Line Height	11-3/8 (290)	11-3/8 (290)	17-1/2 (445)	16-3/8 (417)	17-5/8 (449)	21-7/16 (545)

OUTDOOR UNIT DIMENSIONS

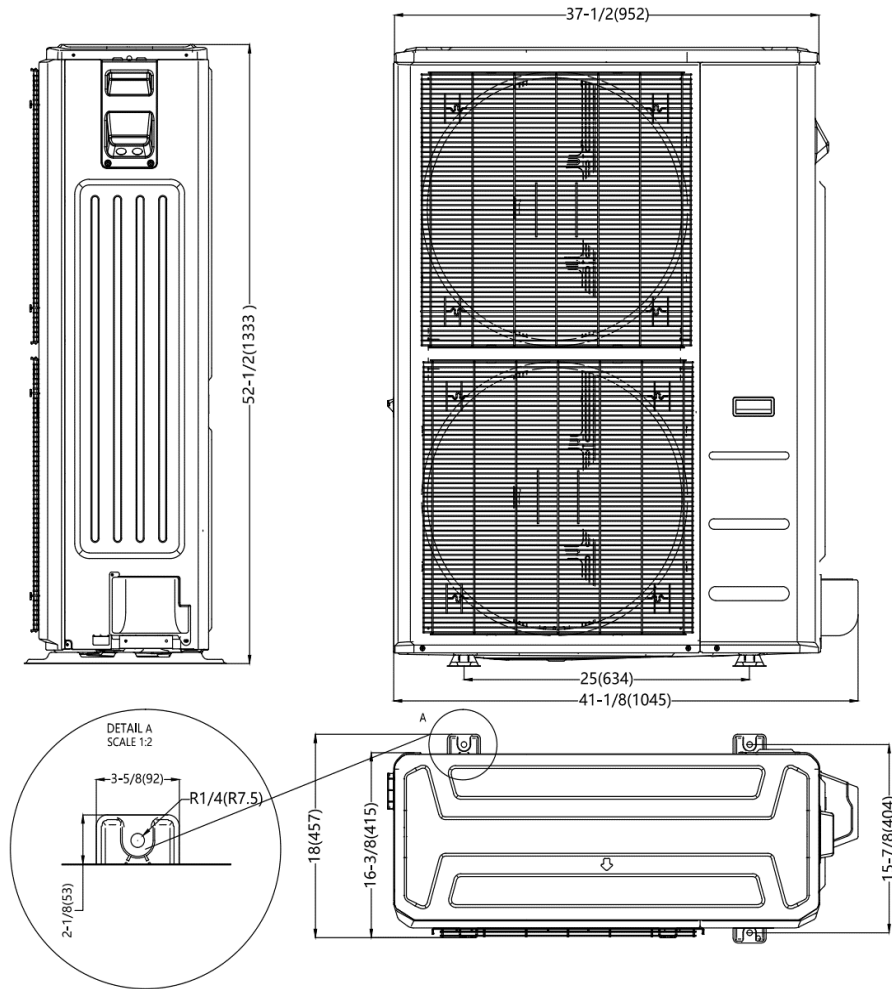

INSTALLATION INSTRUCTIONS FOR OUTDOOR UNIT

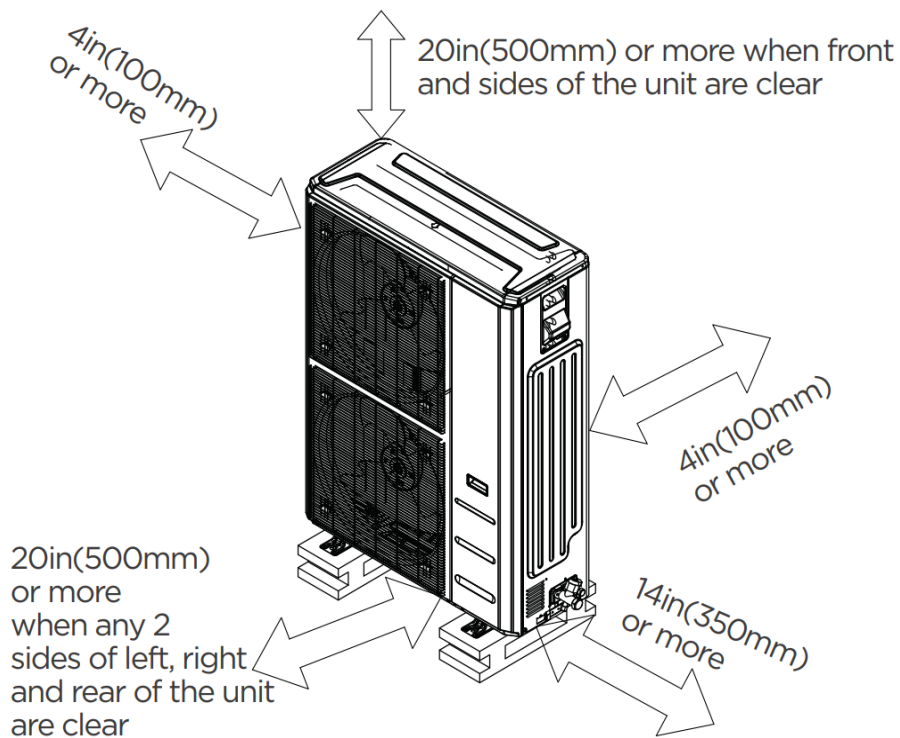

FEATURES

- Multi-position installation: horizontal (left or right), vertical (up or down)
- Aluminum Coil
- R454B refrigerant sensor
- Easy Maintenance
- Multiple control options available:
 - Two way communication wired controller with built-in WiFi:120N(X6W)
 - Third-Party 24V Thermostat