






**SUBMITTAL DATA SHEET**

<b>Duct Heat Pump System</b>	<b>ACIQ-18CD-HH-MB</b>
Location: _____	Approval: _____
Engineer: _____	Date: _____
Submitted to: _____	Construction: _____
Submitted by: _____	Unit #: _____
Reference: _____	Drawing #: _____

<b>Set Code</b>	22023010005845
Indoor unit code	22023011003474
Outdoor unit code	22022016015900
<b>Set Model</b>	
Indoor unit model	ACIQ-18CD-HH-MB
Outdoor unit model	
<b>Certified</b>	  




SYSTEM PERFORMANCE DATA			
<b>Power supply</b>			
Normal Operational Voltage	(V, Ph, Hz)	208-230V, 1Ph,	60Hz
Voltage Range	(V)		187-253
<b>Electrical</b>			
Minimum circuit ampacity(Outdoor)	(A)		20.0
Max.fuse(Outdoor)	(A)		25.0
Connection wiring			14AWG*4
<b>Cooling</b>			
Capacity	(Btu/h)	17000(6500~18800)	
Power Input	(W)	1460(310~1900)	
Current	(A)	9.32(2.3~8.9)	
SEER2	(Btu/W)		18.0
EER2	(Btu/W)		11.7
<b>Heating</b>			
Capacity	(Btu/h)	19000(8900~22000)	
Power Input	(W)	1900(550~2250)	
Current	(A)	11.50(3.80~12.0)	
HSPF2.4	(Btu/W)		9.5
HSPF2.5	(Btu/W)		7.5
COP	W/W		2.93
Heat at 17F(H32)	(Btu/h)		15000
Heat at 5F(H42)	(Btu/h)		17700
COP at 5F(H42)	W/W		1.85

INDOOR UNIT DATA			
<b>Indoor fan motor</b>			
Model			ZKFN-160-8-1-2
Qty			1
Input	(W)		90.00
Output	(W)		160.0
RLA	(A)		1.2
Speed(Hi/Mi/Lo)	(r/min)		850/700/450
<b>Air flow &amp; Noise level</b>			
Indoor air flow (Hi/Med/Lo) (No duct)	(CFM)		//529.41/450.00/370.59
Indoor noise level (Hi/Med/Lo)	[dB(A)]		40/37.5/35
<b>Dehumidification</b>	(L/H)		1.6
<b>Indoor unit</b>			
Dimension (WxDxH)	(inch)		34.65x26.54x8.27
	(mm)		880x674x210
Packing(WxDxH)	(inch)		42.13x28.54x11.02
	(mm)		1070x725x280
Net/Gross weight	(lbs.)		55.34/67.02
	(kg)		25.1/30.4

REFRIGERANT PIPE DATA			
Throttle type	Indoor unit		N/A
	Outdoor unit		EXV
Design pressure	(PSIG)		550/340
Refrigerant Type			R410A
Refrigerant charge	oz		65.26
Refrigerant precharge	(ft)		25.0
	(m)		7.5
Additional charge for each ft	(oz/ft)		0.16
Additional charge for each m	(g/m)		15.0
Liquid side/ Gas side(indoor)	(inch)		1/4"/1/2"
	(mm)		6.35/12.7
Liquid side/ Gas side(outdoor)	(inch)		1/4"/1/2"
	(mm)		6.35/12.7
Max. pipe length	(ft)		98.4
	(m)		30.0
Max. difference in level	(ft)		65.6
	(m)		20.0
Connection method			Flared
Indoor(cooling)	(Deg. °F)		62~90
	(Deg. °C)		17~32
Indoor(heating)	(Deg. °F)		32~86
	(Deg. °C)		0~30
Outdoor(cooling)	(Deg. °F)		-22~122
	(Deg. °C)		-30~50
Outdoor(heating)	(Deg. °F)		-22~75
	(Deg. °C)		-30~24


OUTDOOR UNIT DATA			
<b>Compressor</b>			
Type			Twin-ROTARY
Model			KTM240D43UKT
Brand			GMCC
Capacity	(Btu/h)		25931
Input	(W)		2045
Rated current (RLA)	(A)		14.25
Refrigerant oil/oil charge	(ml)		ESTER OIL VG74 620
<b>Outdoor fan motor</b>			
Model			ZKFN-80-8-3
Qty			1
Input	(W)		/
Output	(W)		80
RLA	(A)		0.8
Speed	(r/min)		810/720
<b>Air flow &amp; Noise level</b>			
Outdoor air flow (Max.)	(CFM)		1765
Outdoor noise level	[dB(A)]		59.0
<b>Outdoor unit</b>			
Dimension (WxDxH)	(inch)		35.04x13.46x26.50
	(mm)		890x342x673
Packing (WxDxH)	(inch)		39.17x15.67x29.13
	(mm)		995x398x740
Net/ Gross weight	(lbs.)		100.97/108.03
	(kg)		45.8/49

**Indoor unit dimension(internal pump)**

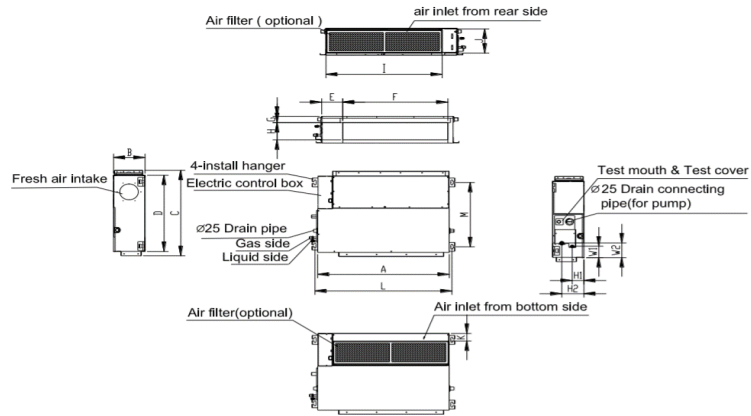





Model (KBTu/h)	unit	A	B	C	D	E	F	G	H	I	J	K	L	M	H1	H2	W1	W2
9/12	mm	700	200	506	450	137	537	30	152	599	186	50	741	360	84	140	84	84
	inch	27.6	7.9	19.9	17.7	5.4	21.1	1.2	6.0	23.6	7.3	2.0	29.2	14.2	3.3	5.5	3.3	3.3
18	mm	880	210	674	600	140	706	50	136	782	190	40	920	508	78	148	88	112
	inch	34.6	8.3	26.5	23.6	5.5	27.8	2.0	5.4	30.8	7.5	1.6	36.2	20.0	3.1	5.8	3.5	4.4
24	mm	1100	249	774	700	140	926	50	175	1001	228	5	1140	598	80	150	130	155
	inch	43.3	9.8	30.5	27.6	5.5	36.5	2.0	6.9	39.4	9.0	0.2	44.9	23.5	3.1	5.9	5.1	6.1
36	mm	1360	249	774	700	140	1186	50	175	1261	228	5	1400	598	80	150	130	155
	inch	53.5	9.8	30.5	27.6	5.5	46.7	2.0	6.9	49.6	9.0	0.2	55.1	23.5	3.1	5.9	5.1	6.1
48	mm	1200	300	874	800	123	1044	50	227	1101	280	5	1240	697	80	150	185	210
	inch	47.2	11.8	34.4	31.5	4.8	41.1	2.0	8.9	43.3	11.0	0.2	48.8	27.4	3.1	5.9	7.3	8.3

**Indoor unit dimension(external pump)**

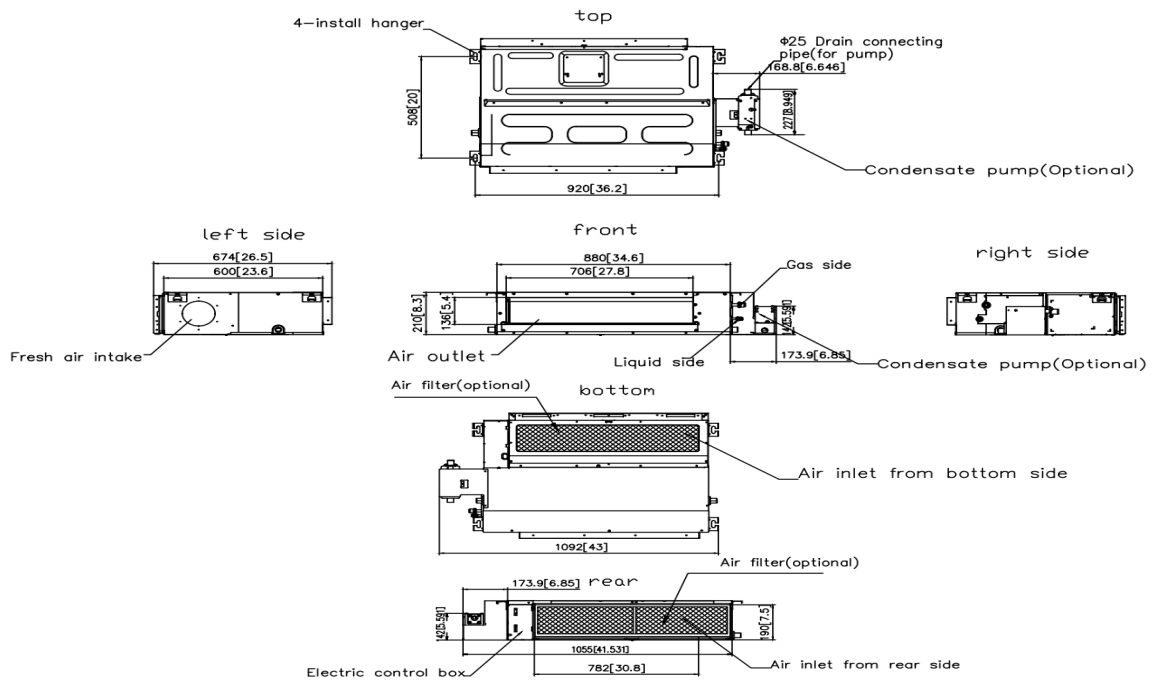

**Outdoor unit dimension**

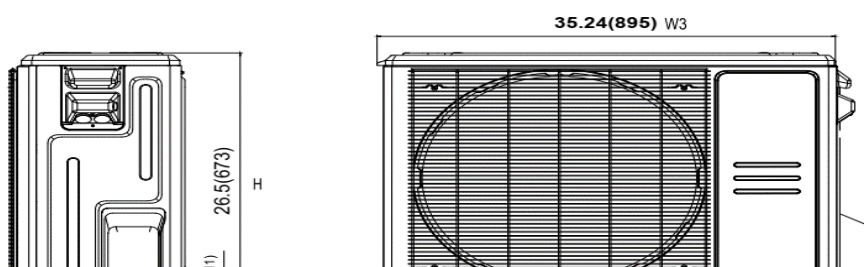

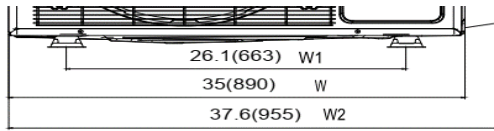

DETAIL A  
SCALE 1:1

