


MH SERIES

Upflow/Downflow Aluminum Coils for use with
Manufactured Home Furnaces

ACiQ™

PRODUCT FEATURES AND SPECIFICATIONS

- Rifled aluminum tubing, enhanced aluminum fins.
- Multi-stage leak testing with high-pressure testing at 500 psi, mass spectrometer pressure decay with helium, then sealed and nitrogen pressurized.
- Left-hand refrigerant and plumbing connections, with downturn suction line for easy installation in manufactured housing applications.
- Downflow plates and manufactured housing drain hose included.
- Fully insulated cabinets with faced insulation.
- Liquid line - 3/8" ODS, suction line - 3/4" ODS on 1-1/2 - 3 ton and 7/8" ODS on 3-1/2 - 5 ton.
- Liquid line Schrader valve for coil pressurization-confirmation testing.
- Heavy duty polypropylene drain pans.
- Drain connection: 177L pans have single LH 3/4" FPT, 195L pans have quad drains, 3/4" FPT.
- AHRI certifiable with all brands of A/C and heat pump systems.
- ETL listed for use with R-22, R-410A, R-454A, and R-32 when proper metering device is used.
- Standard five-year limited parts warranty. Upgrades to an extended 10 year parts warranty with online registration*

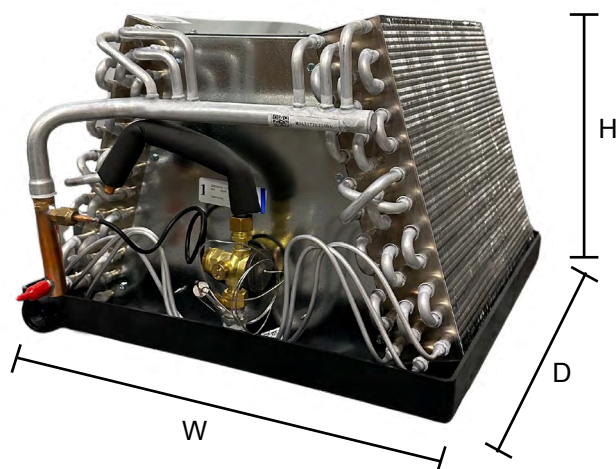

COIL MODEL	METERING DEVICE	NOMINAL CAPACITY	DIMENSIONS			SHIPPING INFORMATION			
			DRAIN PAN		COIL ASSY (H)	SHIPPING WEIGHT (LBS)			SKID QTY
			PAN WIDTH (W)	PAN DEPTH (D)		2 ROW	3 ROW	4 ROW	
ACiQ-MH36EU3VYED	R-32 TXV	36,000	17-3/4	19-5/8	15-1/2	-	21	-	25

Notes: Use metal drain pan on oil furnaces or other applications where outlet temperatures may exceed 290°F +/-5°F.

BRAND	PURPOSE	TONNAGE	FINN PER INCH/FACE AREA	CASED/UNCASED	ROWS OF DX COIL	CONFIG.	METERING	CABINET WIDTH	MATERIAL
ACiQ	MH=Mobile Home R=Residential	18 = 1.5 ton 24 = 2 ton 30 = 2.5 ton 36 = 3 ton 42 = 3.5 ton 48 = 4 ton 60 = 5 ton	A B C D E	U = Uncased C = Cased	2 = 2 3 = 3 4 = 4	M = Multi-Position V = Vertical H = Horizontal	P = Piston/Flowrator W = R454B TXV X = R410A TXV Y = R32 TXV E = EEV	A = 14" B = 17-1/2" C = 21" D = 24-1/2" E = 17-3/4" F = 19-1/2"	C = Copper D = Aluminum

In keeping with its commitment to continuous improvement, ACiQ reserves the right to make changes without notice and incurring obligation. Representative image only. Some models may vary in appearance. Due to continuous product improvement, specifications are subject to change without notice.