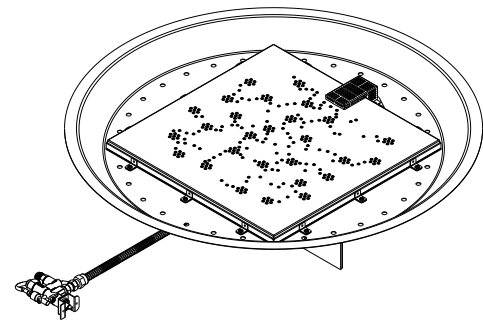
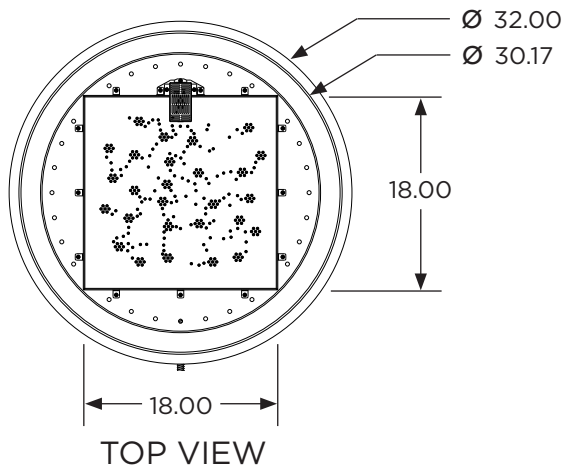


ITEM CODE	BTU/hr. (LP)	BTU/hr. (NG)	FIRE MEDIA	WEIGHT(lbs.)
			<i>Included 5 lb. Bags</i>	<i>Total, Installed</i>
CFP30-B	100,000	104,000	6 bags	60

Technical Specifications:

- CLEARANCE TO COMBUSTIBLES**
 - 72" from top of burner to any overhead combustible material. 24" from edge of burner trim to any combustible side wall materials. 4" from bottom of burner to combustible floor materials
- GAS SUPPLY**
 - Natural Gas - Operating Supply Pressure: Min 6" WC; Max 10.5" WC; IDEAL 7" WC
 - Liquid Propane - Operating Supply Pressure: Min 8" WC; Max 14" WC; IDEAL 11" WC
- CONTROLS**
 - Thermocouple safety valve and push-button sparker
 - Valve connected to appliance; intended for installation on enclosure
- LISTING**
 - Standard: ANSI Z21.97-2017/CSA 2.41-2017 Outdoor Decorative Gas Appliances
 - Testing Agency: Underwriters Laboratories (UL LLC)

Included Items: Manual control valve, push-button sparker, control panel, natural gas conversion kit, control knob and screws, standard fire media