

SER 1300

Light Commercial Energy Recovery Ventilators



STANDARD FEATURES

- Energy recovery core
- Fans with backward curved blades
- Dual service doors & Reversible electrical box
- Push-pull configuration
- External electrical box
- Electrostatic filters
- Removable screw terminal for easy connection
- Full length drain pan
- Outdoor ducts on the same side

OPTIONS & CONTROLS

- MERV 6–13 rated filters
- Compatible with all Fantech HRV/ERV controls
- CO2 sensor
- Shut off damper


Job Name:			
Job Location:			
Job Reference Number:			
Unit Reference Number:			
Engineer:			
Distributor:			
Contractor:			
For Reference:	For Approval:	For Construction:	
Submitted by:		Date:	
Address:			
Tel:	Fax:	Email:	
Notes:			

United States 10048 Industrial Blvd. • Lenexa, KS 66215 • 1.800.747.1762 • www.fantech.net
Canada 50 Kanalflokt Way • Bouctouche, NB E4S 3M5 • 1.800.565.3548 • www.fantech.net

Fantech reserves the right to make technical changes.
 For updated documentation please refer to www.fantech.net

 **fantech**®
 a systemair company

Descriptions	
Cabinet	22 gauge galvanized steel. Baked powder coated paint. Insulated with 1 in. (25 mm) fiberglass with FSK facing and 2 in. (50 mm) of foil-faced high density polystyrene foam on the outdoor air side for condensation control.
Fans	Two (2) factory balanced fans with backward curved blades. Motors come with permanently lubricated sealed ball bearings and (TOP) thermal overload protected.
Energy recovery core*	Three (3) modular energy recovery cores made from water vapor transport durable polymer membrane that is highly permeable to humidity. The ERV core is freeze tolerant and water washable. Core dimensions are 11.5" x 11.5" (290x 290 mm) with a 15" (380 mm) depth.
Filters	The exhaust and fresh air streams are protected by MERV 3 washable filters constructed to meet UL 900. Optional MERV 6, MERV 8, or MERV 13 filters are direct replacement to the MERV 3. Use of MERV 6 filters will add an additional system pressure of 0.88 in. wg (220 Pa) at 1300 cfm (613 l/s). Additional MERV Rated filters available upon request.
Controls	External three (3) position (Low (MIN) / Standby (AUTO) / High (MAX)) rocker switch that will offer continuous ventilation. Compatible with all Fantech ERV controls.
Defrost	A preset frost control sequence is initiated if the outdoor temperature falls below the set point of 23°F (-5°C). During the initial stage, the supply blower shuts down & the exhaust blower switches into high speed to eliminate frost build-up in the core. The unit then returns to normal operation for the final stage of the frost control sequence at which time the sequence is repeated if the outdoor air temperatures is still below the set point.
Serviceability	Cores, filters and drain pan can be accessed easily from both sides of the ERV from hinged access panels. Cores conveniently slide out with only 15 in. (380 mm) clearance. Blowers can be accessed from both side of the ERV from fastened access panels. Blowers are easily removed by taking off the access panel and sliding the motor plates out of the ERV. A quick connect allows for fast inspection of blowers.
Mounting	Unit may be suspended by using threaded rod, not supplied, or placed on a platform. Unit shall be adaptable for easy service of electrical components.
Warranty	Fantech ERV's have a warranty that is limited to 3 years on all parts from the date of purchase, including parts replaced during this time period. If there is no proof of purchase available, the date associated with the serial number will be used for the beginning of the warranty period.

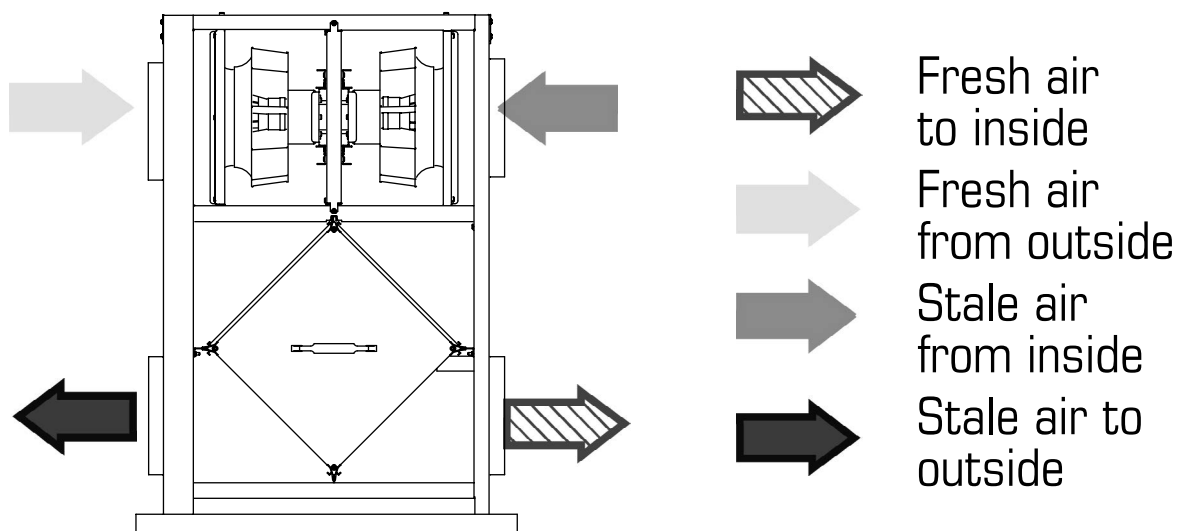

Factory Setting. Unit may be easily reversed in field.


* AHRI certifies the published performance ratings of the COMPONENT used in this product in accordance with AHRI 1060. AHRI Certified Reference Number: 202342542, model number EXR-290-380-250-16-O. Note that only the COMPONENT is AHRI 1060 certified and not the product itself.

Specifications

- Volts: 120V
- Phase: Single
- Amperage: 10.8 Amps Total
- Blowers (x4): 115V, 60Hz, 2.7 Amps


- Weight: 208 Lbs (94 Kg)
- Shipping Weight: 278 Lbs (126 Kg)
- Shipping Dim.: 27 x 56 x 37.5" (674 x 1422 x 946mm)

Ventilation Performance

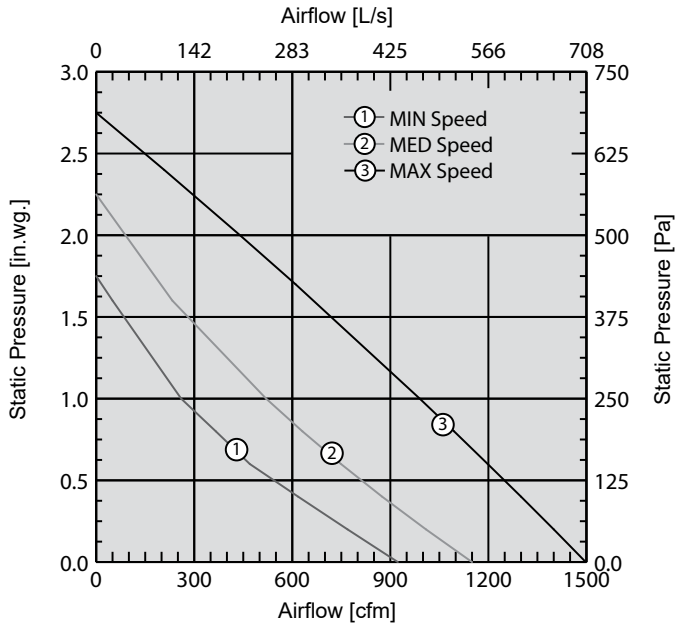


Energy Performance

	Supply temperature		Net airflow		Net Effectiveness		
	°F	°C	cfm	L/s	Sensible %	Latent %	Total %
Heating	35	1.7	840	396	54	35	49
	35	1.7	630	297	57	40	54
Cooling	95	35	840	396	51	32	48
	95	35	630	297	60	37	53

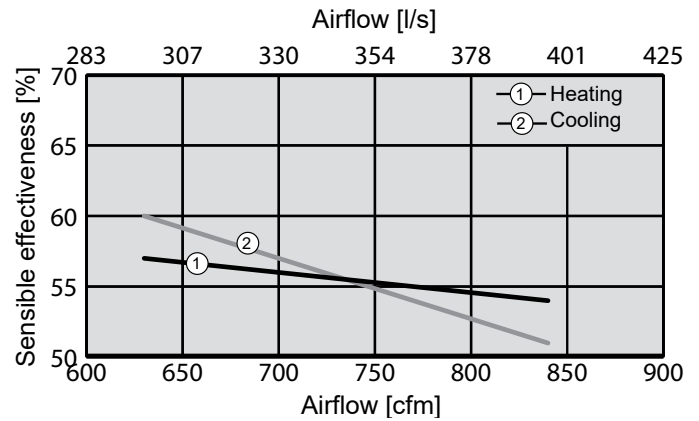

Dimensions

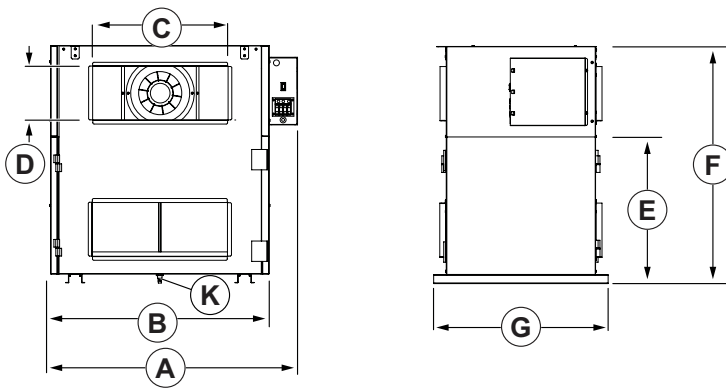

A		B		C		D		E		F		G		K	
in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm
51 ⁷ / ₁₆	1306	47 ³ / ₁₆	1199	24	610	8	203	22	559	35	889	25 ¹³ / ₁₆	655	1 ¹ / ₂	13

United States 10048 Industrial Blvd. • Lenexa, KS 66215 • 1.800.747.1762 • www.fantech.net
 Canada 50 Kanafllakt Way • Bouctouche, NB E4S 3M5 • 1.800.565.3548 • www.fantech.net

Fantech reserves the right to make technical changes.
 For updated documentation please refer to www.fantech.net