



Contents

About This Manual

Overview

Appearance

Display Screen

Get Started

Power On/Off

Power Your Appliances

Charge Your Power Station

Management

Download EcoFlow App


Bind Device and Set Up Internet

Control via Phone

Explore More

Expand Battery Capacity

X-Boost: Powering High-Wattage



FAQ



EcoFlow
App



After-
sales
Policy



Com-
muni-
ty

About This Manual

- This user manual is applicable to the following products: RIVER 3 Plus, RIVER 3 Plus (270).
- The terms "RIVER 3 Plus" and "RIVER 3 Plus (270)" in this manual shall refer to EcoFlow RIVER series products.
- Please note that this manual may be updated without prior notice. If you are

Storage and Maintenance

Safety Instructions and Compliances

Disclaimer

Safety Instructions

Regulatory Compliance

Appendix

What's in the Box

Specifications


at [EcoFlow Support](#) for a better experience and the latest updates.

- The illustrations in this manual use the US version of the product as examples and references. Please refer to the actual product received.
- The availability of certain accessories and features described in this manual may vary depending on your country or region.

Overview

RIVER 3 Plus and RIVER 3 Plus (270) (hereinafter each referred to as "the power station") are power stations with LiFePO₄ battery. They have multiple outputs and charging options to meet your actual needs.

Appearance

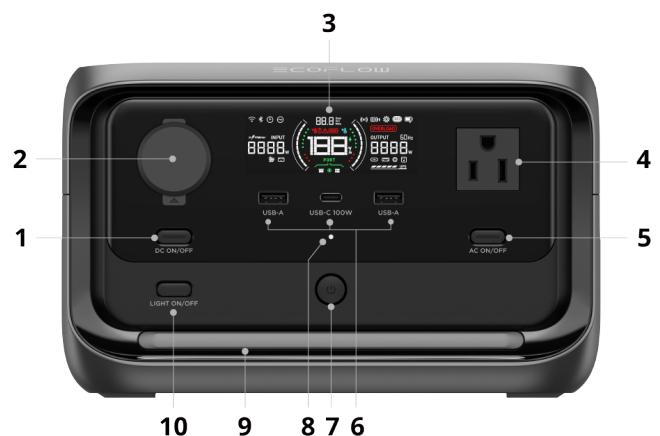

	button	port.
2	DC Output Port (Cigarette Lighter)	Powers up on-board appliances with a rated power < 126W.
3	Display Screen	Displays the real-time battery, input power, output power and other operating status.
4	AC Output Socket	Supports X-Boost feature and powers up devices with a rated power < 600W. The types and numbers of AC sockets vary by country and region. Please refer to the actual product.
5	AC Output Button	Short press once to turn on/off the AC output socket.
6	USB Output Ports (USB-C / USB-A)	Supplies power via USB-C and USB-A ports to charge phones, laptops, game consoles, or other devices.
7	Main Power Button	Short press to turn on the power station, long press for 3 seconds to turn off.

button

port.

8 Main Power Indicator


Breathes white after the power station powers on.

9 Strip Light

Emits a warm yellow glow and offers three modes: low brightness steady, high brightness steady, and high brightness flashing.

10 Light Button

Short press once to turn on/off the strip light or switch mode.

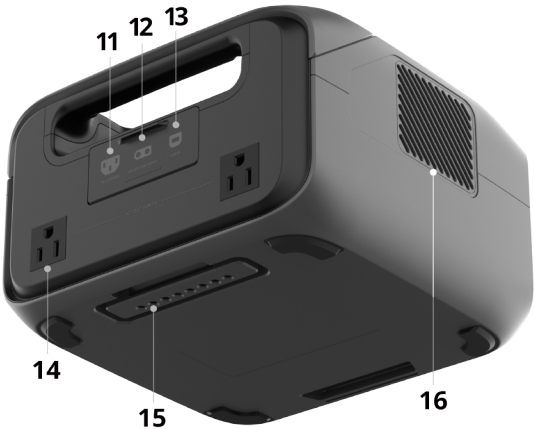

11 AC Input Port

Connects the power station to an AC power source for charging.

12 Solar/Car Input Port

Connects the power station to solar panels or a cigarette lighter socket for charging.

11 AC Input Port

AC power source for charging.

13 USB-B Communication Port

Connects the power station to a computer or a NAS device for communication.

14 AC Output Socket

Supports X-Boost feature and powers up devices with a rated power < 600W.

The types and numbers of AC sockets vary by country and region. Please refer to the actual product.


15 Extra Battery Port (With Protective Cover)

Connects the power station to an EcoFlow Smart Extra Battery to expand the battery capacity.


16 Heat Vent

Dissipates the internal heat.

Display Screen

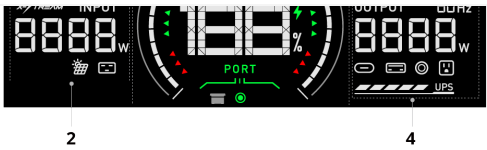

- 1 Status Bar
- 2 Power Input Details
- 3 Main Display Area
- 4 Power Output Details

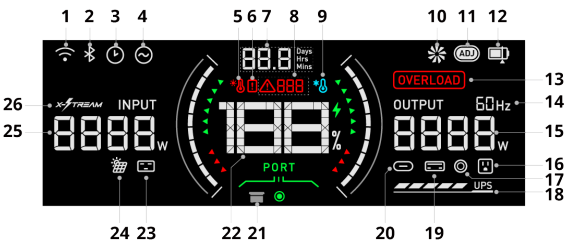

- 1 Wi-Fi

On: The power station is connected to the internet via Wi-Fi.

Flashing: The power station is connected to a wireless network.

Off: Wi-Fi not connected.

- 2 Bluetooth

On: The power station is connected to a Bluetooth

not connected.

3 Scheduled Task

On: At least one pending scheduled task is configured in the EcoFlow app.

4 Output Port Memory

On: Output Port Memory is enabled in the EcoFlow app. When the power station is turned off, undergoes a firmware upgrade, or reaches the discharging limit, it stores the current output state before it powers down. Upon being turned on, completing the firmware upgrade or exceeding the discharging level, it automatically restores all outputs.
Note: The

		an output if that output port is automatically turned off due to its standby time or if it is manually turned off by pressing its corresponding button.
5	High Temperature Warning	Flashing: High temperature protection has been triggered.
6	Battery Error	Flashing: An error has occurred. Check the EcoFlow in-app instructions for troubleshooting.
7	Remaining Charging / Discharging Time	On: Displays the remaining charging or discharging time.
8	Error Code	Flashing: An error has occurred. Check the EcoFlow in-app instructions for troubleshooting.

		Warning	protection has been triggered.
10	Fan		On: The ventilation fan is running. Flashing: Abnormal fan status.
11	Adjustable Charging Speed		On: The power station will be charged at the customized speed defined in the EcoFlow app.
12	Charging/Discharging Limit		On: The charge limit or discharge limit is set in the EcoFlow app. Flashing:
13	Overload Warning		Overload protection has been triggered.
14	AC Output Frequency		On: Displays AC output frequency.
15	Total Output Power		On: Displays total output power.

16	AC Output	are enabled. Flashing: Socket malfunction.
17	DC Output	On: The DC output port (cigarette lighter) is enabled. Flashing: Port malfunction.
18	UPS Status	UPS Icon: UPS function is available. UPS Power Bar: The number of lit bars represents the percentage of the present AC output power relative to the maximum power of the AC output sockets, each bar representing 20%. Note: If the present AC output power exceeds the maximum output power of the AC output sockets,

be triggered and the UPS icon will be off.

19 USB-A Output

On: The port is physically connected and has power output.

Flashing: Port malfunction.

20 USB-C Output

On: The port is connected to a USB device.

Flashing: Port malfunction.

21 Extra Battery

On: EcoFlow Smart Extra Battery is connected via the extra battery port.

22 Battery Level

Percentage: Displays current battery level.

Lightning Icon: The power station is charging.

23 AC Input Port

On: The port is connected to an AC power source.

24	Solar/Car Input Port	On: The port is connected to a DC power source. Flashing: Port malfunction.
25	Total Input Power	On: Displays total input power.
26	X-Stream Fast Charge	On: X-Stream Fast Charge is in use.

Error Message

Error Code	Problem	Solution
009/011/407	High Temperature	Stop using the product. Move it to a well-ventilated place and keep it away from heat source. The error message will clear when the product's temperature falls to normal level.

	010/012/408	Low Temperature	Move the product to a warmer place. The error message will clear when the product's temperature rises to normal level
	501	AC Discharge Overload	Remove the device(s) connected to the AC output port(s). After the error message clears automatically try to use the product again.
	639	DC Output Overload	Remove the device connected to the DC output port. After the error message clears automatically try to use the

687

USB-C Output
Overload

product again.

Remove the device connected to the USB-C output port. After the error message clears automatically try to use the product again.

410

Fan Blocked

Remove all connected charging cables and turn off the product. Check for and remove any foreign objects blocking the heat vent before you try to use the product again.

302

Internal
Communication
Failure

Stop using the product. Remove all connected

charging
cables and
turn off the
product. Wa
for 1 min
before you
turn on the
product
again

- For error codes not covered in the table, view detailed error messages and solutions in EcoFlow app. If the problem persists, stop using the product immediately (do not attempt to charge or discharge it) and consult EcoFlow customer service.

Get Started

Power On/Off

Power On: Short press the main power button

Press the main power button again to turn off the display screen. If the power station is not used for 5 minutes, it will enter hibernation and the display screen will turn off.

Power Off: Long press the main power button for about 3 seconds



Tip:

When the power station is charging, it can't be turned off by long pressing the main power button unless the charging cable is unplugged first.

Power Your Appliances


Via USB Output Port

Connect your devices directly to the USB ports on the power station.



Via AC Output Socket

Press the **AC output button** once to turn on/off the AC output sockets.

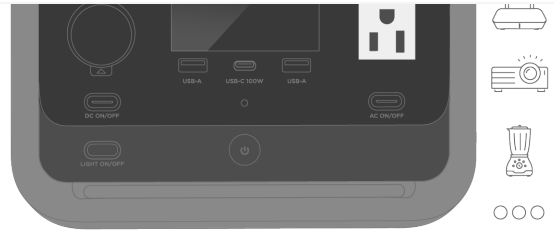

When using the AC output sockets, make sure that the sum power of all loaded appliances is less than the rated power of the sockets (Refer to X-Boost instructions for details about power limitations with X-Boost).

Tip:

AC Timeout Tip: The AC output port of the power station will automatically turn off if the port is idle for a certain period. When the power station is connected to intermittent loads like refrigerators or air conditioners, this feature may be triggered. To ensure continuous power supply for critical uses, such as storing medicines, vaccines, the perishables, or other valuable items in a refrigerator, set the power station's AC timeout interval to never in the EcoFlow app. Additionally, regularly check the power station's battery level.

Via DC Output Port (Cigarette Lighter)

lighter).



When powering up your appliance via the DC output port, please make sure that it can meet the appliance's starting current requirements. Otherwise, the appliance may not be able to start normally (subject to actual testing).

Charge Your Power Station


From a Wall Outlet

Connect the power station's AC input port to a wall outlet using the provided AC charging cable.

Maximum AC Input Power

Power Station: 380W

Power Station + Extra Battery: 650W

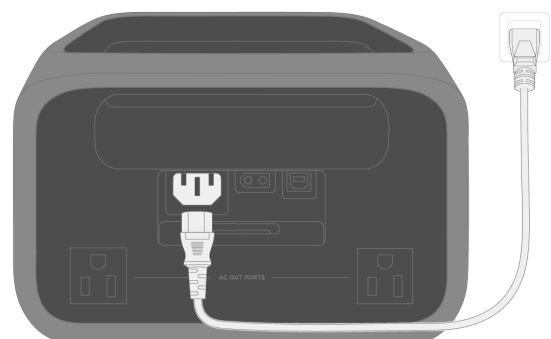


and ensure that the working current of the socket is constantly greater than 10A.

For AC charging, use the AC charging cable included in the package and plug the cable directly into a wall outlet instead of an extension socket.

From Solar

Connect the power station's solar input port to solar panels using a solar charging cable.

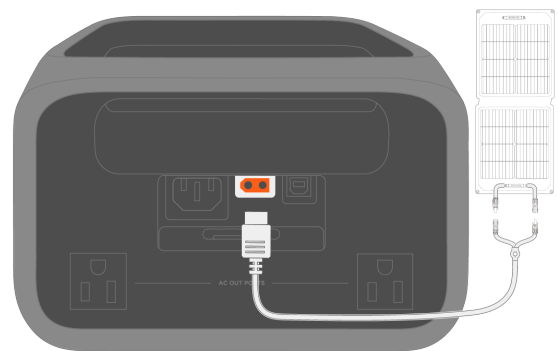


The solar charging cable (solar to XT60i charging cable) and the solar panel are not included in the package.

When using an EcoFlow solar panel to charge the product, connect them according to the instructions in the user manual.

Before connecting the solar panel, ensure that the output voltage of the panel is less than **55V** to avoid product damage.

From a Car Cigarette Lighter

socket using the provided car charging cable.

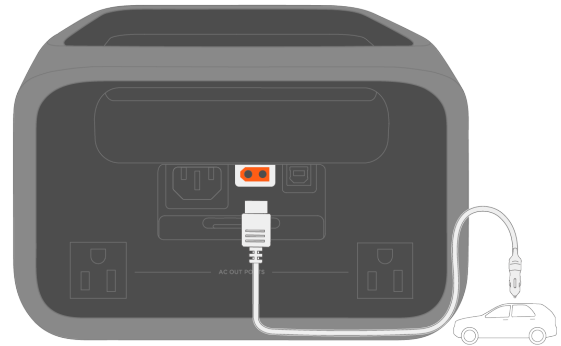

To avoid failure to start the vehicle due to insufficient car battery, start the vehicle first before you begin car charging. In addition, make sure that the car charging cable is securely connected to the cigarette lighter socket.

Management

Download EcoFlow App

EcoFlow offers a companion app for device management. With this mobile application, you can:

- Enjoy all-in-one control of your EcoFlow devices from anywhere.
- Monitor power consumption details seamlessly with real-time updates.
- Personalize your energy scheme with an array of customizable options.
- Promptly receive in-app troubleshooting and firmware updates.

[https://download.ecoflow.com/
app](https://download.ecoflow.com/app)

Bind Device and Set Up Internet

After successfully registering an EcoFlow account, bind your EcoFlow devices to your account to ensure remote access to the device's settings.

To bind a new EcoFlow device:

1. Visit the EcoFlow app and log into your EcoFlow account.
2. Tap the Add Device button or  icon in the top right corner to search for new EcoFlow devices.
3. Select your EcoFlow device and follow the pop-up instructions to complete device binding and Wi-Fi setup.

Tip:

Unable to discover this power station via Bluetooth? Try the following:

- a. Power-off: Press and hold the main power button for about 3 seconds to turn off the power station.
- b. Reset Bluetooth: While the power station is turned off, press and hold the main power button until the screen displays power-

- c. Power on & Retry: Press the main power button to turn on the power station, and start searching again.

Control via Phone

With the EcoFlow app, you can manage all your EcoFlow binding devices on your phone.

The power station supports Wi-Fi and Bluetooth connections, adapting to varying network conditions to ensure convenient access to device settings.


With Internet

When Wi-Fi is stable, you can access the device settings via the internet. This method is always recommended to ensure your EcoFlow device can receive timely firmware updates and pushes.



Without Internet

If the Wi-Fi connection is limited, you can manage the power station locally via Bluetooth.



Explore More

Expand Battery Capacity


To extend the power station's runtime, you can install extra battery capacity. The power station supports connecting up to 1 EcoFlow RIVER 3 Plus Smart Extra Battery to expand capacity.

Note:

Turn off the power station and the smart extra battery first before you connect or remove the extra battery.


To Connect the Extra Battery

1. Remove the protective cover from the extra battery port.
2. Align the groove at the bottom of the power station with the protruding structure on top of the extra battery.
3. Connect their extra battery ports by plugging them together.
4. The extra battery is considered successfully installed once the extra battery icon is displayed on the screen of the power station.



To Remove the Extra Battery

1. Press the unlock button on the extra battery.
2. Lift the power station.
3. Plug in the protective cover.

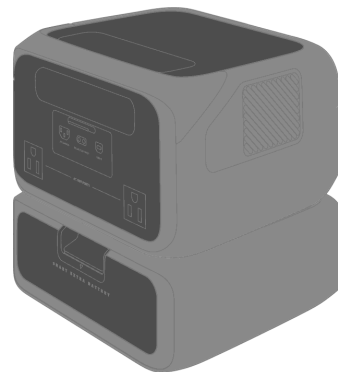

X-Boost: Powering High-Wattage Appliances

The power station's AC output sockets support X-Boost. They can power devices rated at up to 1200W (900W for the JP version) without incurring operation failure caused by overload protection.

any high-wattage appliance to an AC output socket on the power station to use this feature.

- You can enable/disable X-Boost in the EcoFlow app.
- X-Boost is unavailable when the power station is in bypass mode*.

*Bypass mode: When the power station is connected to the grid power through its AC input port and to devices via its AC output sockets, the devices will receive AC power directly from the grid instead of from the power station.

What kind of devices does X-Boost support?

X-Boost is suitable for heating and motor-driven devices. It does not support devices with voltage protection (such as precise instruments). Conduct your own tests to check whether your devices support X-Boost.

Backup for Essential Devices

Basic Setup


A UPS is a device or system that provides a continuous backup power supply when grid electricity fails. You can use the power station as a UPS to support essential household appliances.

The power station acts as a standby UPS with a transfer time within 10 ms. When a

station automatically transfers its battery power for use to connected appliances.

How do I use this feature?

1. Connect the power station to a wall outlet to access grid power.
2. Connect any appliances (with total power < 600W) to the AC output sockets of the power station so it can provide them with power to operate during a power outage.

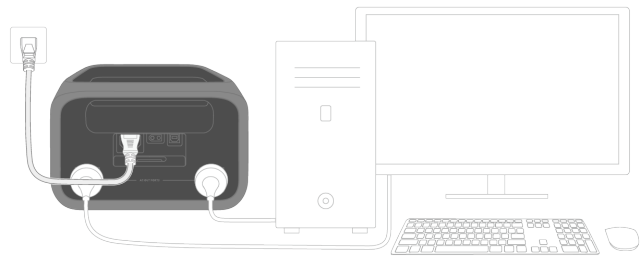

Advanced Setup


The power station can communicate with a computer or a NAS device, allowing users to monitor the power station's operating status and configure UPS settings.

How to establish communication?

1. Visit the website (<https://www.ecoflow.com/support/download/>) to download the Power Manager installation package for your computer or NAS operating system.
2. Install the software on your computer or NAS.

the included USB-B to USB-A UPS communication cable to connect the power station's USB-B communication port to the USB-A port on your computer or NAS.

4. Launch the software to proceed.

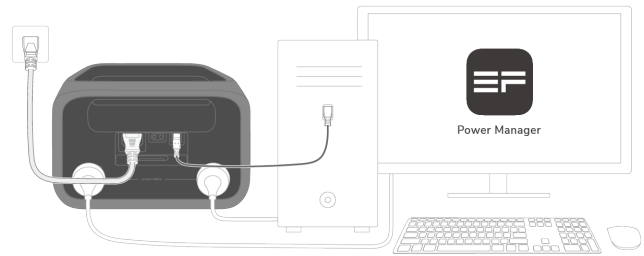

Storage and Maintenance

Storage

- Storage Temperature: -10°C to 45°C (14°F - 113°F)
- Do not store the product in places where the temperature exceeds 45°C (113°F) or falls below -10°C (14°F).
- Store the product in a tidy, dry, and well-ventilated place.
- Keep the product away from liquids, intense heat, and sharp objects.
- For long-term storage of the product, follow these steps every 3 months to maintain battery health:
 1. Discharge the product to 0% battery level.

Note: the product will not be covered by the warranty if it is not charged or discharged for more than 6 months.

Maintenance

- **Cleaning**

Use a soft, dry cloth to wipe and clean the product.

- **Maintaining Battery Health**

Avoid leaving the product unused for extended periods of time.

Charge and discharge the product every 3 months to increase its lifespan.

Safety Instructions and Compliances

Disclaimer

Please read the product document and ensure that you understand it fully before using the product. After reading this document, keep it for future reference. Improper use of this product may cause serious injury to yourself or others, or cause product damage and property loss. Once you use this product, it is deemed that you understand, approve and accept all the terms and content in this document. EcoFlow is not liable for any loss caused by the user's failure to use the product in compliance with the product document. In

interpretation of this document and all documents related to the product. This document is subject to changes (updates, revisions, or termination) without prior notice. Please visit EcoFlow's official website to obtain the latest product information: <https://www.ecoflow.com/>.

Safety Instructions

Transportation

1. Do not subject this product to severe impacts, vibrations, or drops. In case of a severe impact, stop using this product immediately and turn off the power.
2. Do not carry this product onto a plane.

Environment

1. Do not use the product near a heat source, such as a fire source or a heating furnace.
2. Do not place the battery in a low air pressure environment, as this may cause flammable liquids or gases to leak or even an explosion.
3. Do not get the product wet or immerse it in any liquid. When using the product in wet environments like rainy areas or places near water, protect it with a waterproof bag.
4. Follow the environment temperature requirements specified in the product specification to use or store the product. Avoid degradation or damage to the product, or risks to personal

-
5. Do not use the product in an environment with strong static electricity or magnetic fields.
 6. Keep the product out of reach of children and pets. If the product is to be used near children, they should be closely supervised.
 7. Keep the product away from fumes, smoke, steam, and dust.
 8. Store the product in a tidy, dry, and well-ventilated place.

Operation

1. Do not disassemble, repair, or modify this product by yourself. For any repair service, please contact EcoFlow Customer Service.
2. Always disconnect the product from all external power sources before attempting any service or maintenance.
3. To reduce risk of damage to the electric plug and cord, pull the plug rather than the cord when disconnecting the product.
4. Do not pierce the product with sharp objects.
5. Do not put fingers or hands into the product.
6. Do not insert wires or other metal objects into the product to prevent short circuits.
7. Do not block or hinder the heat dissipation system of the product during operation.

accessories. For any replacements, please contact EcoFlow for further assistance.

9. Do not operate this product with a damaged cord or plug.
10. Do not stack any heavy objects on the product.
11. Place the product on a stable and flat surface. Avoid damage to the device or personal injury due to the product falling or tipping over.
12. Use a soft, dry cloth to wipe and clean the product.
13. **AC Timeout Tip:** The AC output port of the power station will automatically turn off if the port is idle for a certain period. When the power station is connected to intermittent loads like refrigerators or air conditioners, this feature may be triggered. To ensure continuous power supply for critical uses, such as storing medicines, vaccines, the perishables, or other valuable items in a refrigerator, set the power station's AC timeout interval to never in the EcoFlow app. Additionally, regularly check the power station's battery level.
14. **Medical Equipment Limit:** The product is not intended for powering life-sustaining medical equipment, including but not limited to medical-grade ventilators (hospital-grade CPAP: Continuous Positive Airway Pressure) or artificial lungs (ECMO: Extracorporeal Membrane Oxygenation). If you plan to

manufacturer first to ensure there are no restrictions on using an external power source with their equipment.

15. **Medical Equipment Interference:** When in use, power station products will generate electromagnetic fields, which are likely to affect the normal operation of medical implants or personal medical equipment such as pacemakers, cochlear implants, hearing aids, defibrillators, etc. If these types of medical equipment are being used, please contact the equipment's manufacturer first to inquire about any restrictions on the use of such equipment. These measures are fundamental to ensure a safe distance between the medical implants (for example, pacemakers, cochlear implants, hearing aids, defibrillators, etc.) and this product while in use.
16. **GROUNDING INSTRUCTIONS:** This product must be grounded. If it should malfunction or breakdown, grounding provides a path of least resistance for electric current to reduce the risk of electric shock. For your safety, EcoFlow provides a power cord with an equipment grounding conductor and a grounding plug. The plug must be plugged into an outlet that is properly installed and grounded in accordance with all local codes and ordinances.
WARNING – Improper connection of the equipment grounding conductor can

consult a qualified electrician instead of modifying the plug provided with the product:

- You are unsure whether the product is properly grounded;
- You find that the plug provided with the product does not fit the outlet.

17. **Risk of Electric Shock:** Never use the product to power tools to cut or access live parts or live wirings, or materials that may contain live parts or live wirings inside, such as building walls, etc.
18. **Use in Repair Facility:** During use in a repair facility like a vehicle repair center, workshop, or any other place where repairs are conducted, do not place the product on the floor, or at a height less than 457 mm (18 inches) above the floor.
19. Do not use a battery pack or appliance that is damaged or modified. Damaged or modified batteries may exhibit unpredictable behavior resulting in fire, explosion or risk of injury.

In Case of Emergency

1. In case of emergency, take precautions against electric shock before touching the product, such as wearing insulating gloves.
2. If the product gets wet, stop using it immediately and refrain from further operation or powering it on. Place the product in a secure, waterproof, and

assistance.

3. If the product falls into water, place it in a secure, waterproof, and well-ventilated area, and keep away from the product until it is completely dry. The dried product should not be used again and must be properly disposed of according to local laws and regulations.
4. If the product catches fire, we recommend that you use the fire extinguishers in the following order: water or water mist, sand, fire blanket, dry powder, and finally a carbon dioxide fire extinguisher. And then dispose of the product in accordance with local battery recycling and disposal laws and regulations.

Recycling and Disposal

1. The product with severe damage, malfunction, or depleted battery life should be properly disposed of or recycled.
2. The product contains batteries. Please dispose of the product following local laws and regulations for battery disposal and recycling. Do not dispose of it with household waste to avoid environmental pollution and safety hazards.
3. If possible, ensure the battery is completely discharged (to 0% capacity) before disposing of the product. If not, refrain from placing the battery directly into a battery recycling box. Instead,

Regulatory Compliance

Contains FCC ID: 2AC7Z-ESPC6MINI1

FCC Compliance Statement

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment. This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation.

Note: This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.

This equipment complies with FCC

This equipment should be installed and operated with a minimum distance of 20 cm between the radiator & your body.

Contains IC: 21098-ESPC6MINI1**IC Compliance Statement**

When using the product, maintain a distance of 20 cm from the body to ensure compliance with RF exposure requirements.

This device complies with Industry Canada licence-exempt RSS standard(s). Operation is subject to the following two conditions:

(1) this device may not cause interference, and

(2) this device must accept any interference, including interference that may cause undesired operation of the device.

This Class A digital apparatus complies with Canadian ICES-003.

Il doit être installé et utilisé à une distance minimale de 20 cm entre le radiateur et toute partie de votre corps.

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence.

L'exploitation est autorisée aux deux conditions suivantes:

(1) l'appareil ne doit pas produire de brouillage, et

(2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

CE

Hereby, EcoFlow Inc. declares that the radio equipment type portable power station is in compliance with Directives 2014/35/EU, 2014/30/EU, 2014/53/EU, 2011/65/EU(RoHS), (EU) 2015/863(RoHS). The full text of the EU Declaration of Conformity is available at the following Internet address: <http://www.ecoflow.com/eu/eu-compliance>

This marking indicates that this product should not be disposed of with other household waste within the EU. Recycle this product properly to prevent possible damage to the environment or a risk to human health via uncontrolled waste disposal and in order to promote the sustainable reuse of material resources. Please return your used product to an appropriate collection point or contact the retailer where you purchased this product. Your retailer will accept used products and return them to an environmentally-sound recycling facility.

部件名称	铅 (Pb)	汞 (Hg)	镉 (Cd)	六价铬 (Cr(VI))	多溴联苯 (PBB)	多溴苯醚 (PB)
塑料结构件	○	○	○	○	○	○
金属结构件	○	○	○	○	○	○
电池	○	○	○	○	○	○
电路板组件	×	○	○	○	○	○
电源线/连接线	×	○	○	○	○	○

本表格依据SJ/T11364的规定编制。
○：表示该有害物质在该部件所有均质材料中的含量均在GB/T226572规定的限量要求以

质材料中的含量超出GB/T26572规定的限量要求。

备注：以上标注“×”的部件根据中国电子电器产品达标管理目录限用物质应用例外清单要求属于豁免。

Appendix

What's in the Box



1. RIVER 3 Plus/RIVER 3 Plus (270)
2. AC Charging Cable
3. Car Charging Cable
4. USB-B to USB-A UPS Communication Cable
5. Manuals & Warranty card

Specifications

	RIVER 3 Plus: EF-RV-H02-1
Model	RIVER 3 Plus (270): EF-RV-H03-1
Net Weight	Approx. 4.7 kg (10.36 lb)
Dimensions (W×D×H)	Approx. 234 x 232 x 146 mm (9.21 x 9.13 x 5.75 in.)
Output	
AC Output Wave Form	Pure sine wave
AC Output (Discharge Only)	US/BR: 120V~60Hz, 600W total
	JP: 100V~50/60Hz, 600W total
	CN: 220V~50Hz, 600W total
	KR: 220V~60Hz, 600W total
	EU/ZA/UK/AU/CH: 230V~50Hz, 600W total
AC Output (Bypass Mode)	US/JP/BR: 100-120V~50/60Hz, 600W total CN/EU/ZA/UK/AU/KR/CH: 220-240V~50/60Hz, 600W total
USB-A Output	5V=2.4A, 12W Max per port 24W total
USB-C Output	PD3.0, QC3.0 5/9/12/15V=3A Max, 20V=5A Max, 100W Max

DC Output	12.6V $\approx$ 10A, 126W Max
Total Output Power	Power Station: 760W Power Station + Extra Battery: 990W
Input	
AC Input	US/JP/BR: 100-120V~50/60Hz, 10A Max CN/EU/ZA/UK/AU/KR/CH: 220-240V~50/60Hz, 6A Max
Solar Input	11-55V $\approx$ 13A, 220W Max
Car Input	11-55V $\approx$ 8A Max, 220W Max
Battery Info	
Rated Capacity	RIVER 3 Plus: 286Wh 22.4V $\approx$ 12.8Ah RIVER 3 Plus (270): 268Wh 22.4V $\approx$ 12Ah
Cell Chemistry	LFP (LiFePO ₄)
Cycle Life	The battery maintains 80% SoH (State of Health) after 3000 cycles at 0.5C/0.5C at 25°C (77°F)
Protection Type	Over Voltage Protection, Overload Protection, Over Temperature Protection, Short Circuit Protection, Low Temperature Protection, Low Voltage Protection, Overcurrent Protection

Environment

Temperature

Optimal	
Operating Temperature	20°C-30°C (68°F-86°F)
Charge Temperature	0°C-45°C (32°F-113°F)
Discharge Temperature	-10°C to 45°C (14°F-113°F)
Storage Temperature	-10°C to 45°C (optimal: 20°C-30°C) 14°F-113°F (optimal: 68°F-86°F)

Communications

Method	CAN, Wi-Fi, Bluetooth
--------	-----------------------

Frequency

- CN/BR/MX: 2400-2483.5 MHz
- EU/UK/JP/KR/AU: 2412-2472 MHz/2422-2462 MHz
- TW/US/CA: 2412-2462 MHz/2422-2452 MHz

Wi-Fi (2.4G)

Maximum Output Power

- CN: ≤20dBm
- US: 0.5297W
- CA: 0.5297W
- JP: 2.921mW/MHz
- EU: 17.50dBm
- UK: 17.50dBm
- AU: 17.50dBm
- KR: 57.08 mW

		Frequency • CN/BR/MX: 2400-2483.5 MHz • EU/UK/TW/US/CA/JP/AU/2402-2480 MHz
	Bluetooth	Maximum Output Power • CN: ≤20dBm • US: 0.1076W • CA: 0.1076W • JP: 3.67mW • EU: 9.50dBm • UK: 9.50dBm • AU: 9.50dBm • KR: 0.106 mW/MHz
Other		
	Operating Altitude	≤2000 m

Copyright © 2025 EcoFlow. All Rights Reserved.