

Inverter Driven Heat Pump

15,000 BTU Wall Mount Type

Job Name \_\_\_\_\_  
 Location \_\_\_\_\_  
 Engineer \_\_\_\_\_  
 Submitted To \_\_\_\_\_  
 Submitted By \_\_\_\_\_  
 Reference \_\_\_\_\_

Date \_\_\_\_\_  
 Approval \_\_\_\_\_  
 Construction \_\_\_\_\_  
 Unit No \_\_\_\_\_  
 Drawing No \_\_\_\_\_

PRODUCT FEATURES

- Wireless remote controller
- Auto|Cool|Dry|Fan|Heat modes
- 24 Hr. timer
- Powerful mode
- Cold prevention
- Auto Restart



MODEL NUMBERS					
Indoor Unit			ASU15RLF1		
Nominal Capacity			14,000		
LINESET REQUIREMENTS					
Connection Method			Flare		
Liquid			Ø1/4 (Ø6.35)		
Gas	in (mm)		Ø1/2 (Ø12.70)		
Drain hose	Material		PP + LLDPE		
	in		Ø 9/16(I.D.), Ø 5/8 to Ø 11/16(O.D.)		
	mm		Ø 13.8(I.D.), Ø 15.8 to Ø 16.7(O.D.)		
INDOOR DIMENSIONS & WEIGHT					
Net (H x W x D)	in		10-9/16 x 33-1/16 x 8		
	mm		268 x 840 x 203		
Gross (H x W x D)	in		10-5/8 x 34-13/16 x 14-3/4		
	mm		270 x 884 x 336		
Net Weight	lb (kg)		19 (8.5)		
Gross Weight			23 (10.5)		
ELECTRICAL SPECIFICATIONS					
Voltage/Frequency/Phase			208/230 V ~ 60 Hz		
Voltage Range			187-264 V		
Running Current	A		0.25		
Input Power	W		28		
SOUND PRESSURE					
Indoor Unit	Cooling	High	dB (A)	42	
		Medium		38	
		Low		33	
		Quiet		25	
	Heating	High	dB (A)	42	
		Medium		38	
		Low		35	
		Quiet		27	
FAN DATA					
Airflow Rate	Cooling	High	CFM (m3/h)	430 (730)	
		Medium		353 (600)	
		Low		312 (530)	
		Quiet		212 (360)	
	Heating	High		CFM (m3/h)	430 (730)
		Medium			362 (615)
		Low			330 (560)
		Quiet			221 (375)

Warranty Information



7 Year Compressor, 5 Year Parts out-of-the-box Warranty



10 Year Compressor, 10 Year Parts Warranty when registered within 30 days of installation in a residence



12 Year Compressor, 12 Year Parts Warranty when registered within 30 days of installation in a residence, and installed by a Fujitsu Elite contractor

ENCLOSURE

Enclosure	Material	Color
	Polystyrene	White

ACCESSORIES

UTY-TTRX		3rd Party Thermostat Converter
UTY-XCBXZ2		Interface Kit
UTY-RNNUM		Wired Remote
UTY-RVNUM		Wired Remote w/backlight
UTY-RSNUM		Simple Remote
UTY-XWZXZ5		Dry Contact Wire Kit
FJ-RC-WIFI-1NA		Intesis Wired WiFi module
FJ-IR-WIFI-1NA		Intesis IR WiFi module
UTY-TFNXZ2		WiFi interface Module




ETL#: 3170288

Due to continuous product improvements, specifications are subject to change without notice. Please log in to the Fujitsu Portal for the most up-to-date documentation <https://portal.fujitsugeneral.com>

Effective Date: 10/1/2019 Version ASU15RLF1 -2019B

DIMENSIONS

Units: In. (mm)

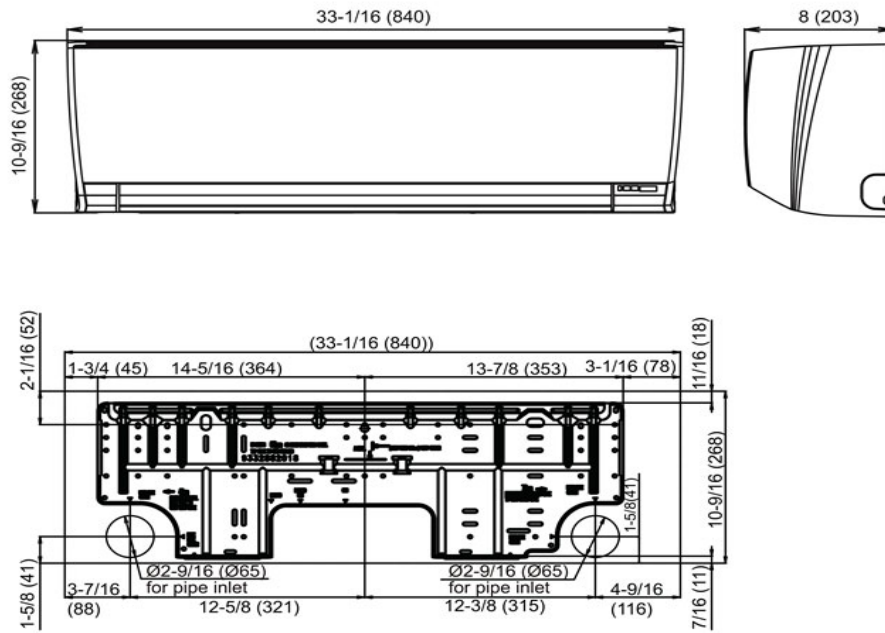

The Fujitsu logo is a worldwide trademark of Fujitsu General Limited. The Halcyon logo and name is a worldwide trademark of Fujitsu General Limited and is a registered trademark in Japan, the USA and other countries or areas. Copyright 2018 Fujitsu General America, Inc. Fujitsu's products are subject to continuous improvements. Fujitsu reserves the right to modify product design, specifications and information in this brochure without notice and without incurring any obligations.

Note: Specifications are based on the following conditions:  
 Cooling: Indoor temperature of 80°F (26.7°C) DB/67°F (19.4°C) WB, and outdoor temperature of 95°F (35°C) DB/75°F (23.9°C) WB. Heating: Indoor temperature of 70°F (21.1°C) DB/60°F (15.6°C) WB, and outdoor temperature of 47°F (8.3°C) DB/43°F (6.1°C) WB. Pipe length: 25ft. (7.5m), Height difference: 0ft. (0m) (Outdoor unit - indoor unit).