

SUBMITTAL DATA

DUC12HP230V1R32AH
12000 BTU/H Slim Duct (HS) Heat Pump System

Job Name	Location	Date
Purchaser	Engineer	
Submitted to	For	
Unit Designation	Schedule No.	
  		
YBE1FB5F	DUC12HP230V1R32AH	XE72-44/E

GENERAL FEATURES

- AHRI Certificate: [215415562 \(Vireo R32\)](#), [215415567 \(Envo R32\)](#), [215415527 \(Sapphire R32\)](#)
- High Efficiency DC Inverter Technology
- Compact and Quiet Design
- Slim Line Construction
- High Static E.S.P Capability -Adjustable
- Internal Condensate Drain Pump
- Flexible Return Air From Bottom Or Rear
- Wireless Remote with LCD Display Included
- XE72-44/E Wi-Fi Wired Controller Included
- Low Ambient Cooling and Heating
- Coil (Indoor and Outdoor) Copper Tube / Aluminum Fin
- Blue Colored Fin - 500 Hrs Salt Spray Tested
- New R32 Refrigerant with Refrigerant Sensor


SPECIFICATIONS, FEATURES & FUNCTION SUMMARY

SYSTEM TYPE			HEAT PUMP		
Indoor Model			DUC12HP230V1R32AH		
Outdoor Model			VIR12HP230V1R32AO	ENV12HP230V1R32AO	SAP12HP230V1R32AO
SYSTEM PERFORMANCE					
Cooling Capacity	Min - Max	Btu/h	8,528 - 17,056	8,528 - 17,056	8,528 - 17,056
	Capacity @95°F	Btu/h	12,000	12,000	12,000
Heating Capacity	Min - Max	Btu/h	7,691 - 15,695	7,691 - 15,695	7,967 - 17,320
	Capacity @47°F	Btu/h	12,000	12,000	12,000
	Capacity @17°F	Btu/h	10,000	10,000	10,300
	Capacity Max @5°F	Btu/h	10,500	10,500	10,500
SEER2			21.0	21.0	22.0
EER2			13.0	13.0	13.0
HSPF2			9.0	9.0	9.0
COP @5°F			1.90	1.90	1.90
Cooling Temperature Range		°F	-20 - 122		
Heating Temperature Range		°F	-22 - 86		
Refrigerant Type			R32		
INDOOR UNIT			DUC12HP230V1R32AH		
Air flow (Min-Max)		CFM	212 - 353		
External Static Pressure (Max)		In W.c.	0.6		
Sound Pressure Level (Min - Max)		dB(A)	25 - 39		
Dehumidification		pt/hr	2.96		
External Dimensions (L x D x H)		in	32-43/64 x 29-11/16 x 11-13/16		
Package Dimension (L x W x H)		in	35-5/16 x 31-13/16 x 14-11/16		
Net Weight		lbs	70.6		
Gross Weight		lbs	83.8		
OUTDOOR UNIT			VIR12HP230V1R32AO	ENV12HP230V1R32AO	SAP12HP230V1R32AO
Sound Pressure Level		dB(A)	52	52	55
External Dimensions (L x D x H)		in	31-37/64 x 13-25/32 x 21-27/32	31 37/64 x 13 25/32 x 21 27/32	34-3/8 x 14-51/64 x 21-27/32
Package Dimension (L x W x H)		in	34-21/64 x 15-43/64 x 24-13/32	34 21/64 x 15 43/64 x 24 13/32	37-7/16 x 16-31/32 x 24-13/32
Net Weight		lbs	67.3	70.6	78.3
Gross Weight		lbs	72.8	76.1	84.9
REFRIGERANT PIPING					
Refrigerant Charge - R32		oz	28.2	28.2	47.6
Additional Charge		oz/ft	0.2	0.2	0.4
Line Set Sized by Indoor Unit (Liquid - Gas)		in	1/4 - 3/8		
Line Set Size (Liquid - Gas) - Flared Connections		in	1/4 - 1/2	1/4 - 1/2	1/4 - 1/2
Pre-Charge Length		ft	25		
Pipe Length (Min - Max)		ft	10 - 66	10 - 66	10 - 131
Max. Pipe Elevation		ft	40	40	82
ELECTRICAL					
Power Supply			208-230V / 1Ph / 60Hz (Powered by the Outdoor Unit)		
Voltage Range (Min - Max)		VAC	187 - 253		
Rated Current - Cooling		A	6.64	6.64	5.9
Rated Current - Heating		A	6.41	6.41	7.8
MCA		A	10	10	11
MOCP		A	15	15	15
Suggested Breaker Size		A	10	10	15
Main Power Wire Size		AWG	Per Local Code		
Interconnecting Wire Size		AWG	14 / 4		

FEATURES & FUNCTIONS SUMMARY	
Inverter Type	G20
Ultra Low Frequency Torque Control	Yes
Power Factor Correction	Yes
Compressor Type - Inverter	High Efficiency Rotary
Basepan With Electric Heater	Yes
Indoor & Outdoor Fin Coating (Blue Fin)	Yes
Intelligent Defrosting	Yes
Intelligent Preheating	Yes
Low Voltage Startup	Yes
Memory/Power Failure Recovery	Yes
Self Diagnosis	Yes
Wired Controller Interface	Yes
WiFi Included	No
Indoor Fan Type	Centrifugal
Multi Fan Speeds	4 Speeds
Indoor Unit Display	No
Auxiliary Electrical Heater	No
Ventilation (Outdoor Air)	No
REMOTE CONTROLLER FUNCTIONS	
Auto Mode	Yes
Auto Fan	Yes
Auto Swing (Horizontal Auto Swing)	No
Auto Swing - 180° (Vertical Auto Swing)	No
Clock	Yes
Dry Mode	Yes
Dry Anti-Mildew (X-Fan) Mode	Yes
Energy Saving Mode	Yes
Dirty Filter Alert	No
Fan Speed Control (7 Speeds)	Yes
I Feel Function	Yes
Privacy Lock	Yes
Quiet Mode	No
Room Temperature Display	No
Sleep Mode	Yes
3 Sleep Mode Options	No
Timer Mode	Yes
Turbo Mode	Yes
Display On/Off Control	No
Freeze Guard Mode	Yes
Power Failure Mode	Yes

NOTE:

Please check the Multi-zone submittals for Ducted or Mixed Performance table.

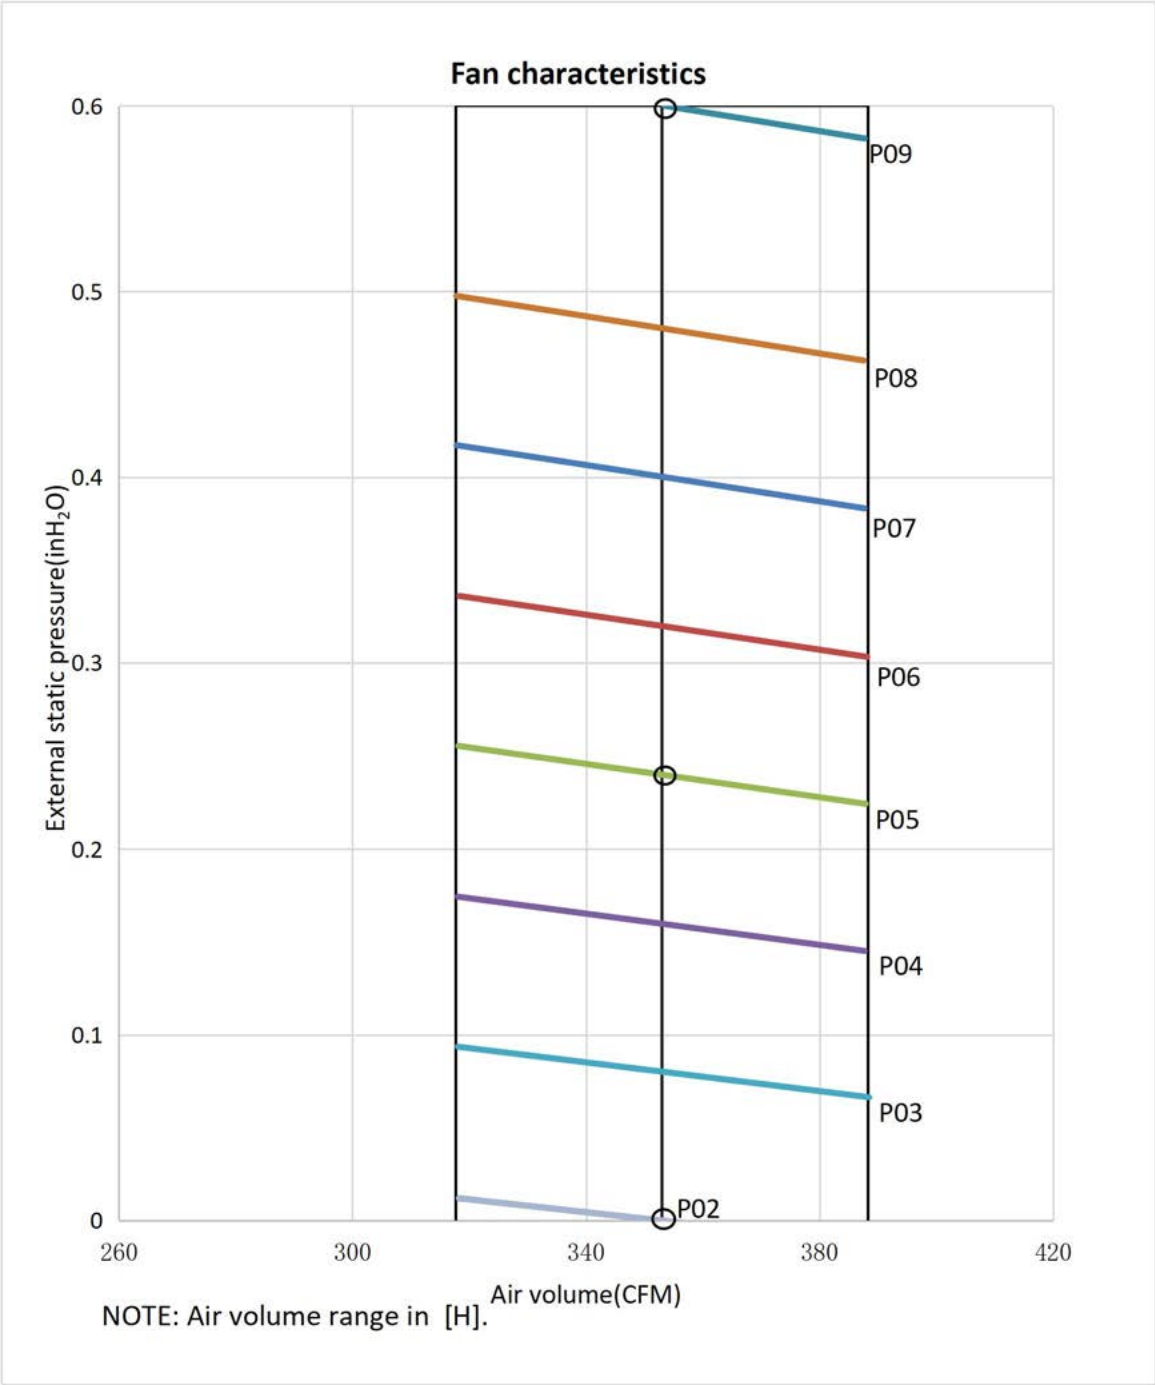


NOTE:
The static pressure is adjusted using the wired controller. Refer to the wired controller instruction manual for more information.

DIMENSIONS

INDOOR UNIT

Unit: inch


DUC12HP230V1R32AH	
DIMENSIONS	
A	29 9/64
B	19 11/16
C	32 43/64
D	11 13/16
E	29 11/16
F	27 9/16
G	27 9/16

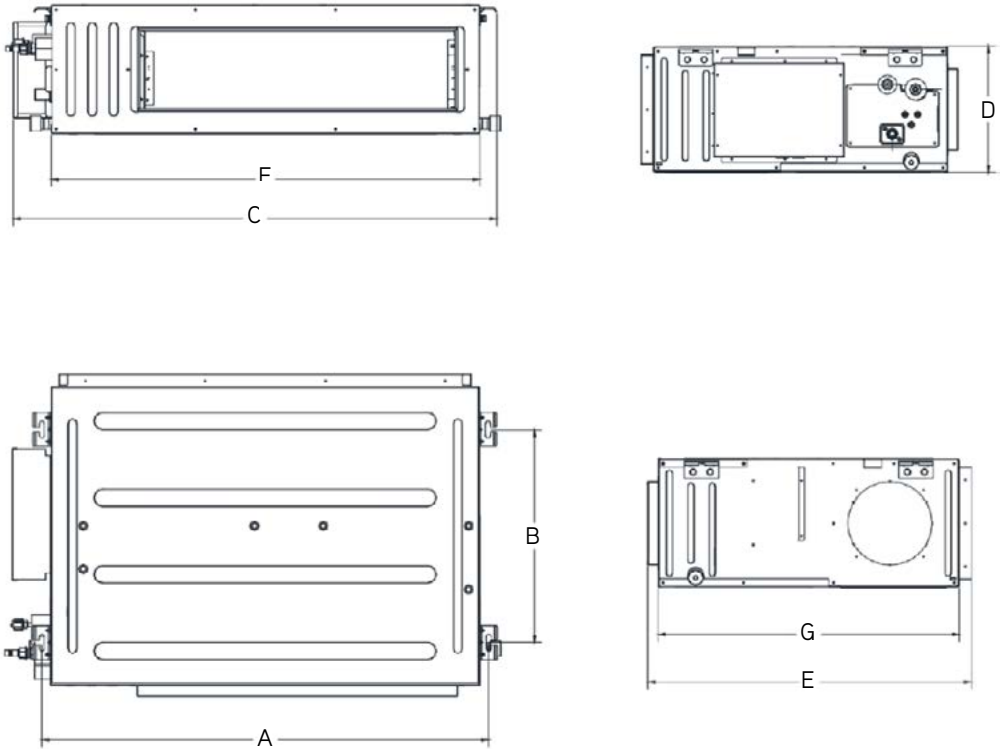

OUTDOOR UNIT

Unit: inch

VIR12HP230V1R32AO	
DIMENSIONS	
A	29 21/64
B	31 37/64
C	21 27/32
D	11 13/16
E	13 25/32
F	20 5/32
G	13 5/64
ENV12HP230V1R32AO	
DIMENSIONS	
A	29 21/64
B	31 37/64
C	21 27/32
D	11 13/16
E	13 25/32
F	20 5/32
G	13 5/64
SAP12HP230V1R32AO	
DIMENSIONS	
A	31 11/16
B	34 3/8
C	21 27/32
D	13 1/64
E	14 51/64
F	20 25/32
G	13 21/32


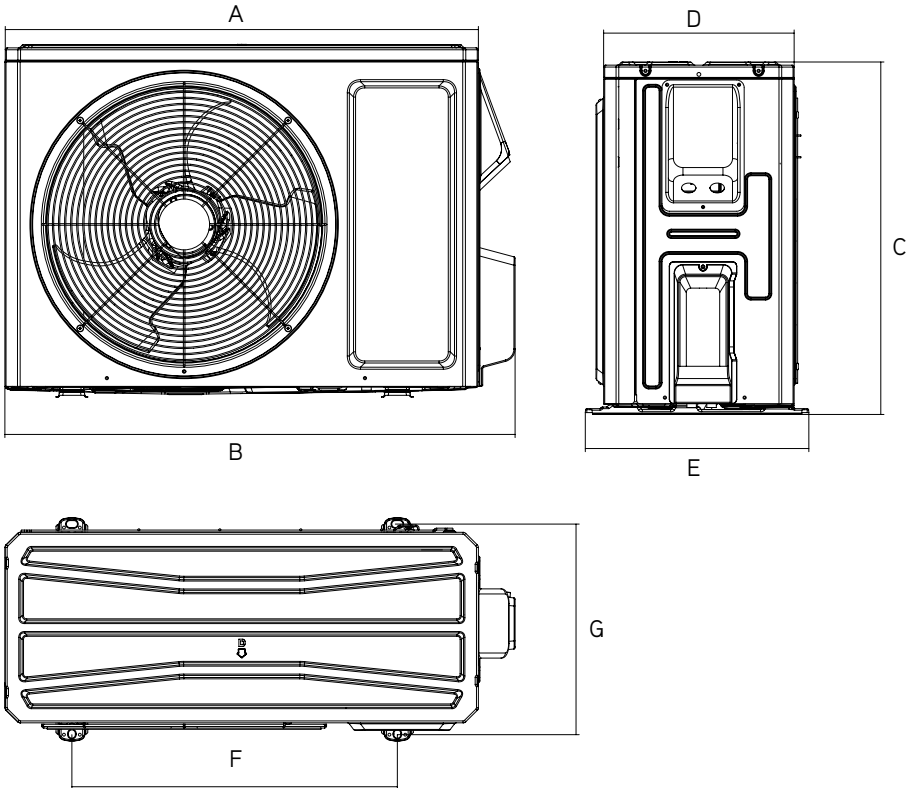


SUPPLY AND RETURN AIR OPENING DIMENSIONS

SUPPLY AIR OUTLET

Unit: inch



DUC12HP230V1R32AH	
DIMENSIONS	
A	7-5/8
B	17-3/4
C	1

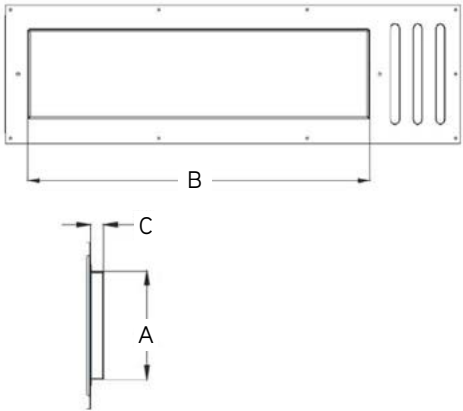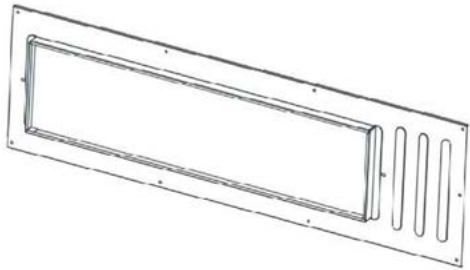

RETURN AIR INLET

Unit: inch


DUC12HP230V1R32AH	
DIMENSIONS	
D	10-3/8
E	26
F	1-1/8

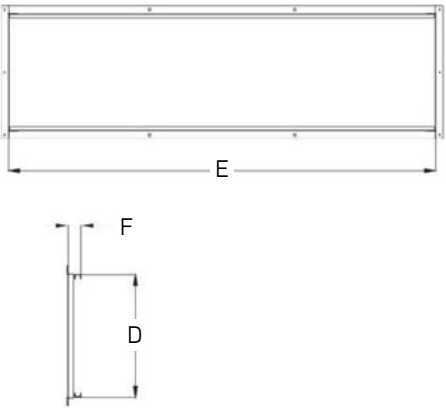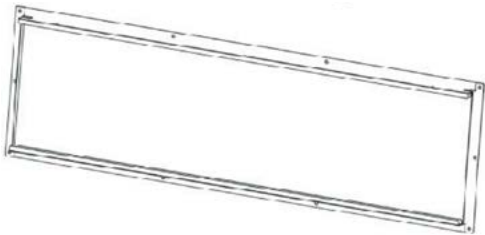

CLEARANCES



INDOOR UNIT

Minimum clearance

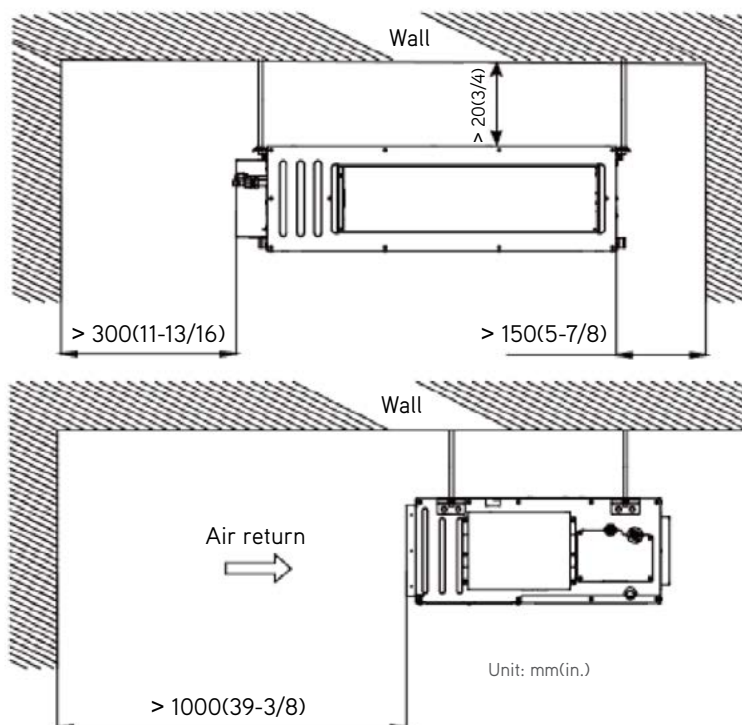

OUTDOOR UNIT

Minimum clearance

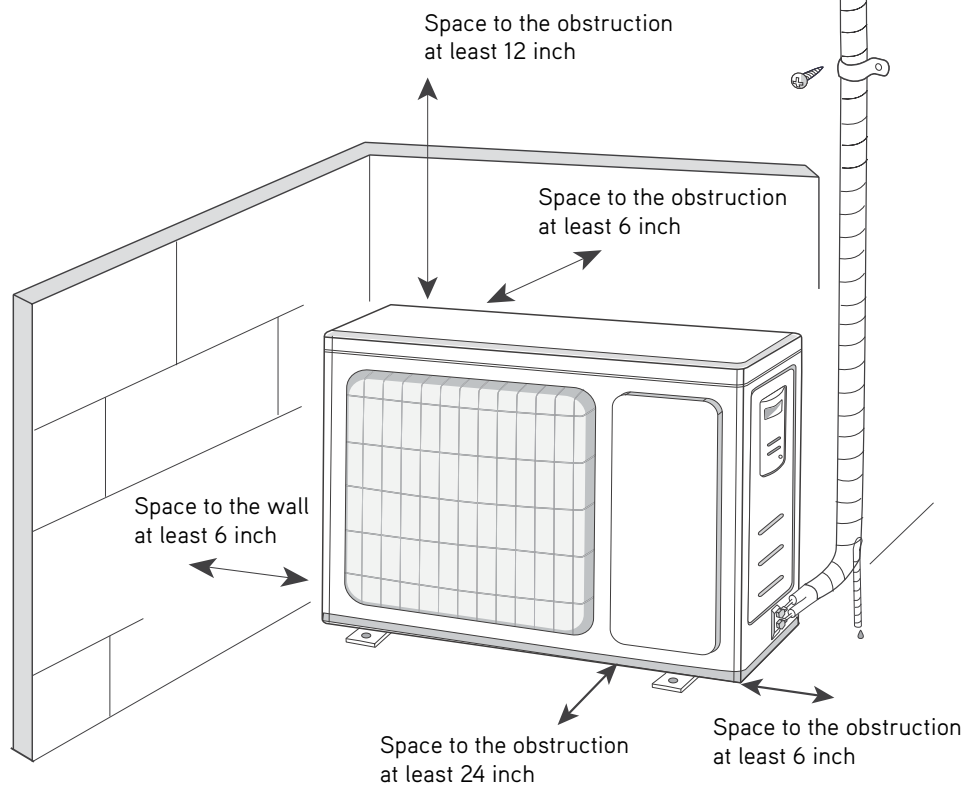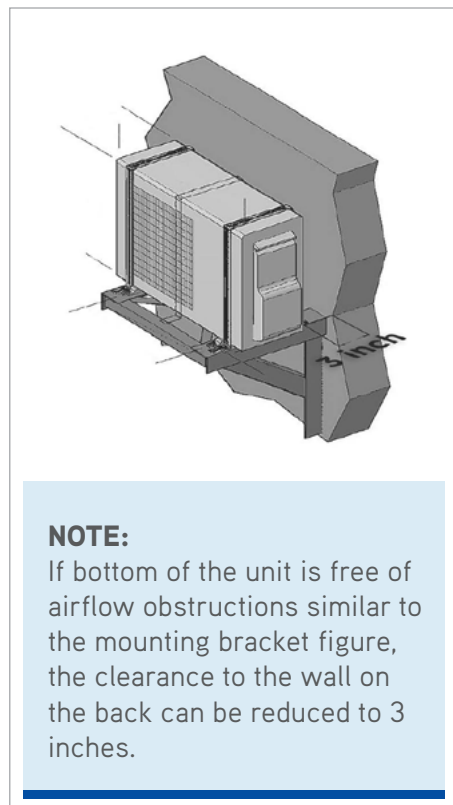

Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs without notice or without incurring obligations. All Rights reserved.

GREECOMFORT.COM/SYSTEM-DOCUMENTATION