

HIGH PERFORMANCE • GENTLE AIR FLOW • ENERGY EFFICIENT

Canarm's HAF18 Horizontal airflow fan is designed to provide gentle circulation of air in greenhouses and other agricultural applications.

The HAF18 features a 1/8 HP totally enclosed, 120V motor. The variable speed motor can be adjusted accordingly to meet your requirements.

Featuring open guard spacing for better air distribution and a hanging bracket. When suspended, the fan can pivot up and down and swivel 360° for optimal control of air stream.



HAF18

FEATURES

- 18" horizontal air flow fan.
- Totally enclosed motor.
- Powder coated guard has wide spacing to eliminate the build up of debris.
- 120V, 8 foot grounded cord & plug.
- Zinc dipped OSHA guard option available.

WARRANTY: 1 YEAR ON FAN.



HAF18-ZO

PERFORMANCE DATA & SPECIFICATIONS

MODEL NUMBERS	DESCRIPTION	VOLTAGE	MOTOR HP	WATT	AMPS	CFM	RPM	SPEED	SPEED CONTROL
HAF18	18" Greenhouse fan powder coated with Hanging Bracket	120V	1/8	130	1.1	2350	1550	Variable	Optional
HAF18-ZO	18" Greenhouse fan Zinc dipped with Hanging Bracket	120V	1/8	130	1.1	2350	1550	Variable	Optional


WIDE SPACED GUARD

Eliminates debris build up.




VELOCITY MAPPING CHART

This chart indicates the air distribution pattern. It is a graphic illustration of air velocity in feet per minute.

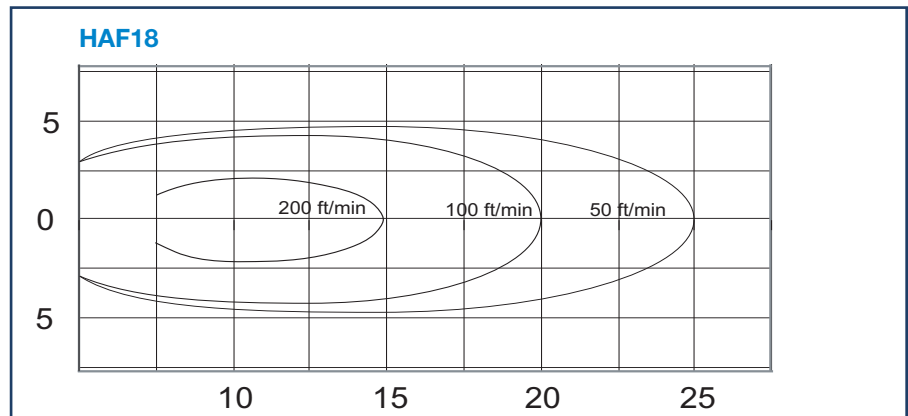


TYPICAL LAYOUT FOR HAF FANS IN 500' POULTRY HOUSES

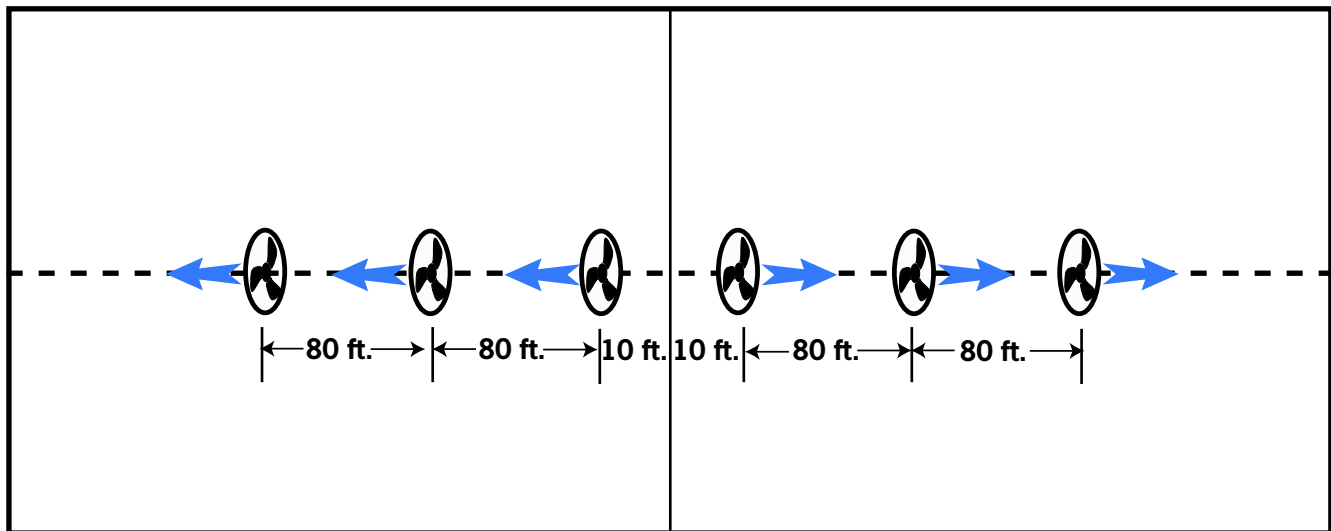

Typical recirculating fan layout using six 18-inch axial vane fans, hung under ceiling along centerline of house. Fan number and spacings may vary according to house conditions.

TYPICAL AIRFLOW FOR HAF FANS

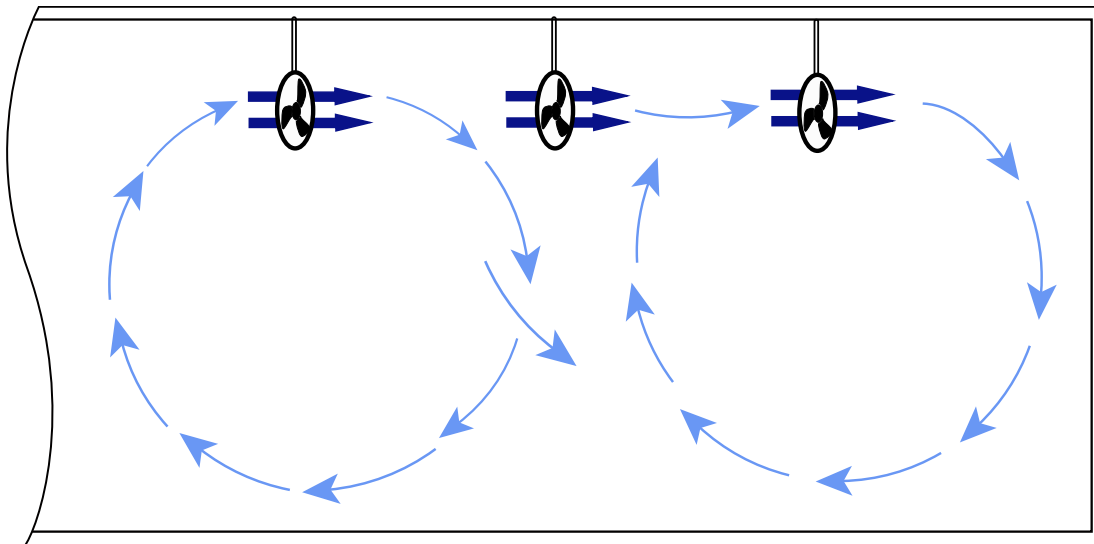

Typical airflow pattern for axial vane recirculating fans.