



SF100-3C SPECIFICATIONS

BLOWER:


- High Efficiency Constant Airflow ECM motor engineered for continuous operation
- Dynamically balanced centrifugal blower wheel for quiet, efficient performance

HOUSING:

- Can be mounted in any orientation to studs or joists with included brackets
- Rugged, galvanized steel construction. Overall Dimensions: 13" x 10 5/8" x 10 1/8"
- 6" round ducting, intake includes test port for airflow measurement
- Built-in motorized damper: Open when fan runs, power close when fan cycles/powers off
- Accepts 10 x 10 x 2 (nominal) filter up to MERV16
- 1/2" electrical connection - Hardwired by electrician

CONTROLS:

- Accepts signal from Energy Management system
- NO/NC contact to provide signal to other equipment

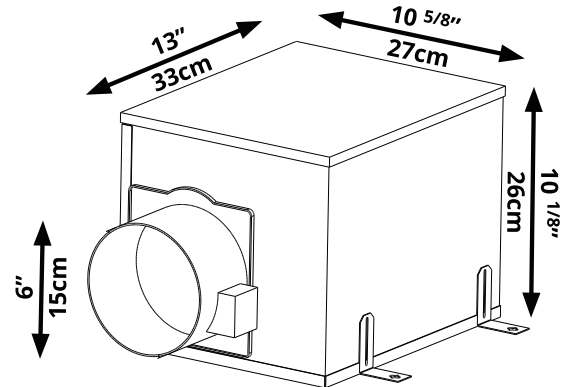

OPTIONAL ACCESSORIES



MERV13



MERV16

CODE COMPLIANCE



Intertek



Most Efficient
2022
www.energystar.gov



Can be used to
comply with:

