

PEAD-AA24NL & PUZ-AK24NLHZ
24,000 BTU/H HORIZONTAL-DUCTED INDOOR UNIT
24,000 BTU/H HYPER HEAT PUMP OUTDOOR UNIT



Job Name:

System Reference:

Date:



Indoor Unit.....PEAD-AA24NL

Outdoor Unit.....PUZ-AK24NLHZ



INDOOR UNIT FEATURES

- Auto fan speed mode
- Built-in condensate lift mechanism (up to 27-9/16")
- Multiple control options including: comfort app, third-party interfaces and both wired and wireless controllers
- Optional FB Series filter boxes for easy access and service
- Unobtrusive ceiling-concealed design for short-run ductwork
- Wide ranging external static pressure (0.14-0.60 in. WG)

OUTDOOR UNIT FEATURES

- Built-in base pan heater
- High Speed Start-up: High speed heating at start up: Hyper-Heating INVERTER® reduces the time for heating at start up by about half compared to standard models
- Hyper-Heating INVERTER®: Variable speed INVERTER-driven compressor
- Pre-charged refrigerant: volume for piping length up to 100 ft
- Pressure/temp protection
- Wide Heating Range: Wide heating range: heating performance down to -13°F (average of 80% heating capacity)

SPECIFICATIONS: PEAD-AA24NL & PUZ-AK24NLHZ

Cooling at 95F ¹	Maximum Capacity	Btu/h	24,800
	Rated Capacity	Btu/h	24,000
	Minimum Capacity	Btu/h	12,700
	Maximum Power Input	W	1,840
	Rated Power Input	W	1,790
	Moisture Removal	Pints/h	8.2
	Sensible Heat Factor	-	0.63
Heating at 47F ²	Power Factor [208V / 230V]	%	93 / 93
	Maximum Capacity	Btu/h	28,000
	Rated Capacity	Btu/h	28,000
	Minimum Capacity	Btu/h	12,800
	Maximum Power Input	W	2,104
	Rated Power Input	W	2,104
	Power Factor [208V / 230V]	%	94 / 94
Heating at 17F ³	Maximum Capacity	Btu/h	25,000
	Rated Capacity	Btu/h	17,000
	Maximum Power Input	W	4,140
	Rated Power Input	W	1,900
Heating at 5F ⁴	Maximum Capacity	Btu/h	25,000
	Maximum Power Input	W	3,856
Heating at -13F ⁵	Maximum Capacity	Btu/h	17,700
Efficiency	SEER2		19.3
	EER2 ¹		13.4
	HSPF2 [IV]		9
	COP at 47°F ²		3.9
	COP at 17°F at Maximum Capacity ³		1.7
	COP at 5°F at Maximum Capacity ⁴		1.9
	COP at -13°F at Maximum Capacity ⁵		1.84
Electrical	ENERGY STAR® Certified		Yes
	Voltage, Phase, Frequency	V AC / V AC, ø, Hz	208 / 230, 1, 60
	Guaranteed Voltage Range	V AC	198 - 253
	Voltage: Indoor - Outdoor, S1-S2	V AC	208/230
	Voltage: Indoor - Outdoor, S2-S3	V DC	12-24
	Short-circuit Current Rating [SCCR]	kA	5
	Recommended Fuse/Breaker Size (Outdoor)	A	25
Indoor Unit	Recommended Wire Size [Indoor - Outdoor]	AWG	14
	MCA	A	2.25
	Fan Motor Output	W	121
	Airflow Rate at Cooling, Dry	CFM	512, 565, 636, 742
	Airflow Rate at Heating, Dry	CFM	512, 565, 636, 742
	Sound Pressure Level [Cooling]	dB (A)	27, 29, 31, 35
	Sound Pressure Level [Heating]	dB (A)	27, 29, 31, 35
	External Static Pressure	in.WG	0.14, 0.20, 0.28, 0.40, 0.60
	Drain Pipe Size O.D.	inch [mm]	1-1/4 [32]
	Unit Dimensions (W x D x H)	inch x inch x inch [mm x mm x mm]	43-5/16 x 28-7/8 x 9-7/8 [1,100 x 732 x 250]
	Package Dimensions (W x D x H)	inch x inch x inch [mm x mm x mm]	53-15/16 x 35-7/16 x 13 [1,370 x 900 x 330]
	Unit Weight	lbs [kg]	67 [30]
	Package Weight	lbs [kg]	79 [36]
	Fan Motor Type		DC Motor
IDU Operating Temp. Range	Cooling Intake Air Temp [Maximum / Minimum]	°FDB, °FWB / °FDB, °FWB	90, 73 / 66, 59
	Heating Intake Air Temp [Maximum / Minimum]	°FDB	82 / 50

NOTES

- ¹Cooling at 95°F (Indoor: 80°F DB, 67°F WB // Outdoor: 95°F DB, 75°F WB)
²Heating at 47°F (Indoor: 70°F DB, 60°F WB // Outdoor: 47°F DB, 43°F WB)
³Heating at 17°F (Indoor: 70°F DB, 60°F WB // Outdoor: 17°F DB, 15°F WB)
⁴Heating at 5°F (Indoor: 70°F DB, 60°F WB // Outdoor: 5°F DB, 4°F WB)
⁵Heating at -13°F (Indoor: 70°F DB, 60°F WB // Outdoor: -13°F DB, -14°F WB)
 *Indoor/Outdoor Unit Operating Temperature Range (Cooling Air Temp [Maximum / Minimum]):
 • Wind baffles required to operate below 23°F DB in cooling mode.
 • Heat pump system with wind baffle: 0°F - 115°F.
 • Refer to wind baffle documentation for further information.
 ** Outdoor Unit Operating Temperature Range (Cooling Thermal Lock-out / Re-start Temperatures; Heating Thermal Lock-out / Re-start Temperatures):
 • System cuts out in heating mode and automatically restarts at these temperatures.

SPECIFICATIONS: PEAD-AA24NL & PUZ-AK24NLHZ

Outdoor Unit	MCA	A	24
	MOCP	A	39
	Fan Motor Output	W	74+74
	Airflow Rate Cooling	CFM	3,740
	Airflow Rate Heating	CFM	3,740
	Defrost Method		Reverse Cycle
	Coating on Heat Exchanger (Bluefin, Sea Coast)		Yes, Yes
	Sound Pressure Level, Cooling ¹	dB (A)	52
	Sound Pressure Level, Heating ²	dB (A)	53
	Compressor Type		Twin Rotary
	Compressor Model		MRK36FFGMC
	Compressor Oil [Type // Charge]	Type // oz	RM68EH // 47
	External Finish Color		Munsell No.3Y 7.8/1.1
	Base Pan Heater		Built-in
	Unit Dimensions (W x D x H)	inch x inch x inch [mm x mm x mm]	41-11/32 x 14 x 52-43/64 [1,050 x 355 x 1,338]
	Package Dimensions (W x D x H)	inch x inch x inch [mm x mm x mm]	42-15/16 x 17-3/4 x 58-5/16 [1,090 x 450 x 1,480]
	Unit Weight	lbs [kg]	231 [105]
	Package Weight	lbs [kg]	257.94 [117]
ODU Operating Temp. Range	Cooling Intake Air Temp [Maximum / Minimum*]	°FDB	115 / 23
	Heating Intake Air Temp [Maximum / Minimum]	°FDB, °FWB / °FDB, °FWB	70, 59 / -13, -13
	Heating Thermal Lock-out / Re-start Temperatures**	°FDB	-22 / -13
Refrigerant	Type		R454B
	Pre-Charged Refrigerant Amount	lbs, oz	9, 14
	Maximum Pre-Charged Piping Length	ft [m]	100 [30]
	Additional Refrigerant Charge Per Additional Piping Length	oz/ft	0.6
Piping	Gas Pipe Size O.D. [Flared]	inch [mm]	5/8 [15.88]
	Liquid Pipe Size O.D. [Flared]	inch [mm]	3/8 [9.52]
	Maximum Piping Length	ft [m]	165 [50]
	Maximum Height Difference	ft [m]	100 [30]
	Maximum Number of Bends		15

NOTES

¹Cooling at 95°F (Indoor: 80°F DB, 67°F WB // Outdoor: 95°F DB, 75°F WB)

²Heating at 47°F (Indoor: 70°F DB, 60°F WB // Outdoor: 47°F DB, 43°F WB)

³Heating at 17°F (Indoor: 70°F DB, 60°F WB // Outdoor: 17°F DB, 15°F WB)

⁴Heating at 5°F (Indoor: 70°F DB, 60°F WB // Outdoor: 5°F DB, 4°F WB)

⁵Heating at -13°F (Indoor: 70°F DB, 60°F WB // Outdoor: -13°F DB, -14°F WB)

*Indoor/Outdoor Unit Operating Temperature Range (Cooling Air Temp [Maximum / Minimum]):

• Wind baffles required to operate below 23°F DB in cooling mode.

• Heat pump system with wind baffle: 0°F - 115°F.

• Refer to wind baffle documentation for further information.

** Outdoor Unit Operating Temperature Range (Cooling Thermal Lock-out / Re-start Temperatures; Heating Thermal Lock-out / Re-start Temperatures):

• System cuts out in heating mode and automatically restarts at these temperatures.

INDOOR UNIT ACCESSORIES: PEAD-AA24NL


Lineset	100 x 1/4 x 100 x 5/8 Lineset Twin-Tube Insulation	MLS145812T-100
	100 x 3/8 x 65 x 5/8 Lineset Twin-Tube Insulation	MPLS385812T-100
	15 x 1/4 x 15 x 5/8 Lineset Twin-Tube Insulation	MLS145812T-15
	15 x 3/8 x 15 x 5/8 Lineset Twin-Tube Insulation	MPLS385812T-15
	30 x 1/4 x 30 x 5/8 Lineset Twin-Tube Insulation	MLS145812T-30
	30 x 3/8 x 30 x 5/8 Lineset Twin-Tube Insulation	MPLS385812T-30
	50 x 1/4 x 50 x 5/8 Lineset Twin-Tube Insulation	MLS145812T-50
	50 x 3/8 x 50 x 5/8 Lineset Twin-Tube Insulation	MPLS385812T-50
	65 x 1/4 x 65 x 5/8 Lineset Twin-Tube Insulation	MLS145812T-65
	65 x 3/8 x 65 x 5/8 Lineset Twin-Tube Insulation	MPLS385812T-65
Control Interface	3-Pin Wiring Harness	PAC-715AD
	5-Pin Wiring Harness	PAC-725AD
	Airzone Wired Blueface Controller Black	AZZBSBLUEZEROCN
	Airzone Wired Blueface Controller White	AZZBSBLUEZEROCB
	Airzone Wireless Lite Controller Black	AZZBSLITERN
	Airzone Wireless Lite Controller White	AZZBSLITERB
	Airzone Wireless Think Controller Black	AZZBSTHINKRN
	Airzone Wireless Think Controller White	AZZBSTHINKRB
	IT Extender for kumo station	PAC-WHS01IE-E
	kumo station for the Comfort app	PAC-WHS01HC-E
	Operation and Error Status Output Adapter ¹	PAC-SF40RM-E
	Procon BACnet and Modbus Interface	PAC-UKPRC001-CN-1
	Thermostat Interface for 3rd Party Thermostats	PAC-US445CN-1
	Wireless Interface Adapter for the Comfort app	PAC-USWHS002-WF-2
Remote Sensor	Flush Mount Remote Temperature Sensor for SEZ SLZ SVZ and all P-Series models	PAC-USSEN002-FM-1
	Wall Mount Remote Temperature Sensor	PAC-SE41TS-E
	Wireless temperature and humidity sensor for the Comfort app	PAC-USWHS003-TH-1
Filter Box	Filter Box with MERV 13 Filter	FBM2-3-A
Wireless Remote Controller	Lockdown Bracket for Wireless Handheld Remote Controllers	RCMKP1CB
	RedLINK Wireless Remote Controller	MHK2
	Universal Wireless MA Handheld Remote Controller	PAR-FL32MA-E
	Universal Wireless Receiver for PAR-FL32MA-E	PAR-FA32MA-W
Wired Remote Controller	Deluxe MA Wired Remote Controller ¹	PAR-42MAAUB
	Simple Direct Wired Remote Controller	PAC-SDW01RC-1
	Simple MA Remote Controller ¹	PAC-YT53CRAU-J
	Touch MA Wired Remote Controller ¹	PAR-CT01MAU-SB
Disconnect Switch	30A600VUL fits 2 X 4 utility box - Black	TAZ-MS303
	30A600VUL fits 2 X 4 utility box - White	TAZ-MS303W
Control Wire	202PR 1PR shielded 1PR plenum wire for Airzone 100 ft reel	CW2042S2-100
	202PR shielded 1PR plenum wire for Airzone 500 ft reel	CW2042S2-500
Condensate	Blue Diamond Advanced Mini Condensate Pump w Reservoir Sensor 208230V recommended	X87-721
	Blue Diamond MaxiBlue Advanced Mini Condensate Pump w Reservoir Sensor 110V up to 48000 BTUH recommended	X87-711
	Blue Diamond MegaBlue Advanced Condensate Pump w Reservoir Sensor	X87-835
	Blue Diamond Sensor Extension Cable 15 Ft	C13-103
	Refco Condensate Pump 100-240 VAC up to 120000 BTUH	COMBI
	Sauermann Condensate Pump	SI30-230
Power Supplies and Auxiliary Components	Backup Heat Relay Kit Adapter for CN24 or CN152 Connector	CN24RELAY-KIT-CM3
NOTES		

OUTDOOR UNIT ACCESSORIES: PUZ-AK24NLHZ

Control/Service Tool	ControlService Tool	PAC-SK52ST
	M- & P-Series Maintenance Tool Cable Set	M21EC0397
	Maintenance Tool Interface	PAC-USCMS-MN-1
Stand	18 Dual Fan Stand	QSMS1802M
	24 Dual Fan Stand	QSMS2402M
	Condenser Wall Bracket	QSWB2000M-1
	Condenser Wall Bracket - Stainless Steel Finish	QSWBSS
	Outdoor Unit 3-14 inch Mounting Base Pair - Plastic	DSD-400P
	Outdoor Unit Stand 12 High	QSMS1202M
Centralized Drain Pan	Central Drain Pan	PAC-SH97DP-E
Drain Socket	Drain Socket	PAC-SG61DS-E
Hail Guards	Hail Guard	HG-A2
M-NET Converter	M-Net Interface for P-Series	PAC-SJ95MA-E
Snow/Rain Diverter	SnowRain Diverter	SRD-5
Mini-Split Wire	14 Gauge 4 wire Armored MiniSplit Cable250 ft roll	SW144-250
	14 Gauge 4 wire Armored MiniSplit Cable50 ft roll	SW144-50
	14 Gauge 4 wire MiniSplit Cable250 ft roll	S144-250
	14 Gauge 4 wire MiniSplit Cable50 ft roll	S144-50
Air Outlet Guide	Air Outlet Guide 1 Piece	PAC-SH96SG-E (two pieces are required)
Control Interface	3-Pin Wiring Harness	PAC-715AD
	5-Pin Wiring Harness	PAC-725AD
Mounting Pad	Condensing Unit Mounting Pad 24 x 42 x 3	ULTRILITE2
Wind Baffle	Front Wind Baffle	WB-PA3 (two pieces are required)
NOTES		

INDOOR UNIT DIMENSIONS: PEAD-AA24NL

- Notes 1. Use an M10 screw for the suspension bolt (field supply).
2. Keep the service space for maintenance at the bottom.
3. This drawing is for PEAD-AA09-12-15-18-24-30NL models, which have 2 fans.
PEAD-AA36-42NL models have 3 fans.
4. If the inlet duct is used, remove the air filter (supplied with the unit), then install the filter (field supply) at the suction side.
5. Heat air to 0°C(32°F) or higher when taking fresh air with a fresh air intake.

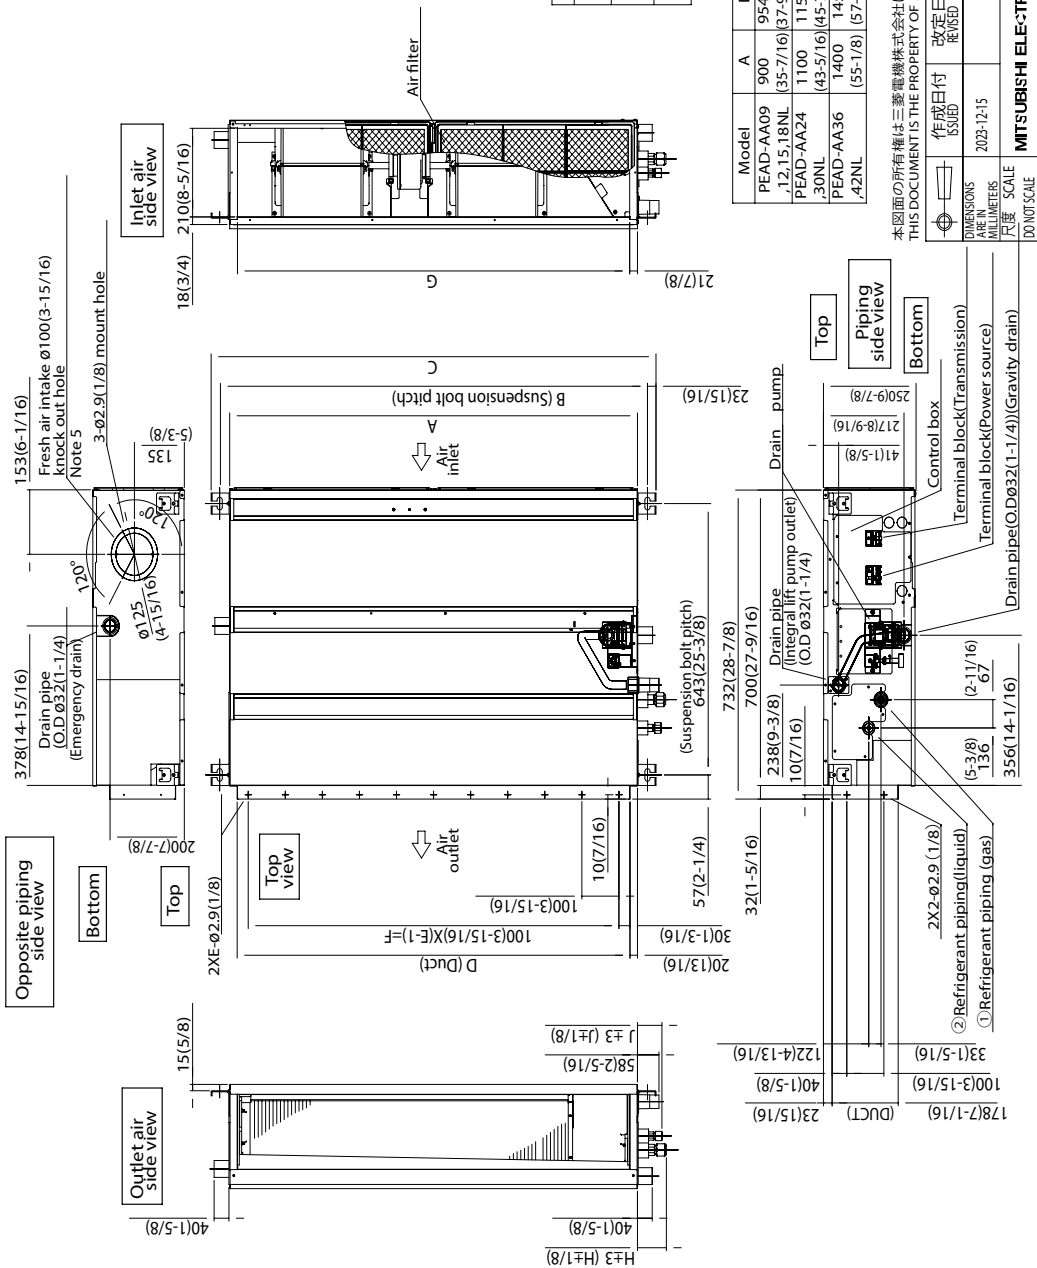


Model	J	① Gas pipe	② Liquid pipe
PEAD-AA09 NL	62 (2-1/2)	φ9.52 (3/8)	φ6.35 (1/4)
PEAD-AA12, 15, 18NL		φ12.7 (1/2)	
PEAD-AA24, 30, 36, 42NL	66 (2-5/8)	φ15.88 (5/8)	φ9.52 (3/8)

Model	A	B	C	D	E	F	G	H
PEAD-AA09	900 (35-7/16)	954 (37-9/16)	1000 (39-3/8)	860 (33-7/8)	9	800 (31-1/2)	858 (33-13/16)	72 (2-7/8)
PEAD-AA24, 30NL	1100 (43-5/16)	1154 (45-7/16)	1200 (47-1/4)	1060 (41-3/4)	11	1000 (39-3/8)	1058 (41-11/16)	78 (3-1/8)
PEAD-AA36, 42NL	1400 (55-1/8)	1454 (57-1/4)	1500 (59-1/16)	1360 (53-9/16)	14	1300 (51-3/16)	1358 (53-1/2)	

THIS DOCUMENT IS THE PROPERTY OF MITSUBISHI ELECTRIC CORPORATION.	
作 成 日 付 ISSUED	
改 定 日 付 REVISED	
2023-12-15	
DIMENSIONS ARE IN MILLIMETERS	
尺 寸 SCALE	
DO NOT SCALE	
EXTERNAL DIMENSION PEAD-AA09-12-15-18-24-30-36-42NL	
PAGE NO. REV.	
MITSUBISHI ELECTRIC C- RP-RATI-N W K894C86N	
PAGE 1 / 2	

OUTDOOR UNIT DIMENSIONS: PUZ-AK24NLHZ

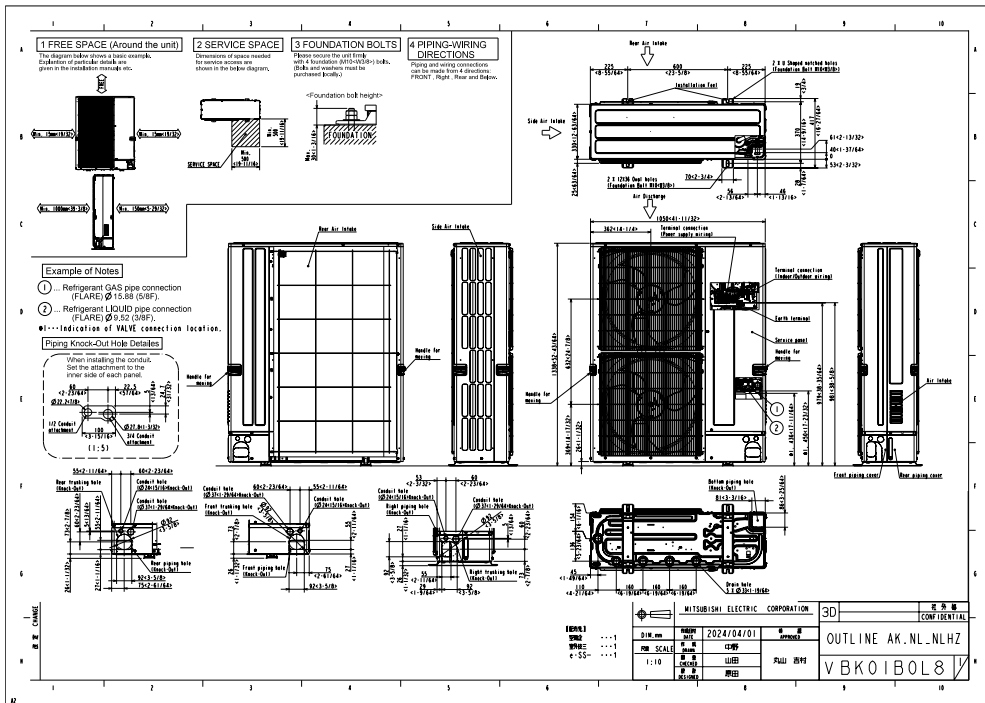

Model name
PUZ-AK36/42/48NL
PUZ-AK36/42/48NL
PUZ-AK48NL
TPU24036/042/048IKALNOA
TPU24036/042/048IKALNOA
NTSKS048L121A
PUZ-AK24/30/36/42/48NLHZ
PUZ-AK24/30/36/48NLHZ
TPU24024/030/036/042/048IKALNOA
NTSKS024/030/036/048L121A