

Designer

	Multi Zone	Multi-Room Ductless systems
Submittal Data: SC-18CC-HP230	18,000 BTU/H Ceiling Cassette	
Job Name	Location	Date
Purchaser	Engineer	
Submitted To	For Reference	Approval Construction
Unit Designation	Schedule No.	
GENERAL FEATURES		
-Quiet Operation -Multi-Speed Fan		
-4-way Discharge Air		
-Internal Condensate Drain Pump		

-Swing Louver

-Wireless Remote Controller

-Power Failure Recovery

-Sentry Condensate Overflow Protection

SC-CC-GRILLE-18K -Decorative Grille (Included)



Units Specification & Data

System Ratings Cooling* 14,400 BTU/H Rated Capacity

Heating*

Rated Capacity 16,000 BTU/H

Sound Pressure (Hi/Lo)**

Cooling 46/42 dbA 46/42 dbA Heating

Air Flow (min/max)

Indoor Fan 265/353 CFM

Electrical Ratings

Netted polypropylene
12-in
305-mm
1.2-in
31-mm

	Ů.
Fan Motor	
Output Power	11 W
FLA	0.2 A
Power Supply	
Normal Operational Voltage	208/230 V, 1 Phase, 60 Hz
Voltage Range	187 - 253 V
MCA	1.0 A
Interconnecting Cable Wire Size	14-4 AWG

Refrigerant Piping Data			
Refrigerant Type	R410A		
Gas Pipe Size (OD)	1/2-in		
Liquid Pipe Size (OD)	1/4-in		
Connection Method	Flared		
* Test conditions are based on AHRI 210/240. **Sound Power ratings are per AHRI 270 and AHRI 350			







Decorative Grille (Included)


SC-CC-GRILLE-18K

#

Weight (Net/Gross)

40/51 lbs

MINIMUM CLEARANCES

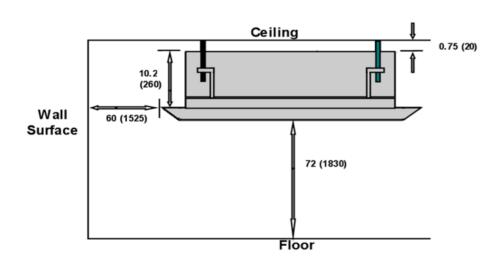

Notes

- 1. Recommended Interconnecting Cable Type Stranded Bare Copper Conductors THHN 600V Unshielded Wire
- 2. Power wiring cable size must comply with applicable national and local codes.

Ceiling

3. Test conditions are based on AHRI 210/240.