

SED Supreme Series

MODEL SED400SC SED500SC

Ultra Silent, High Performance, Attractive Design Grille
Description

Ventilating fan should be ceiling mounted and capable of exhausting air quietly and efficiently. The SED series is HVI certified.

It comes with a DC motor which is known for its high efficiency and long lasting reliability. It holds an ETL evaluation and conforms to UL and cUL safety standards.

With Speed Controller (OFF/50-Max CFM)



Housing

Made of rugged 26 GA galvanized steel

8" diameter metal duct which includes a light weight built in backdraft damper.

Motor/Blower

Plug in permanently lubricated motor- Engineered for continuous operation.

Totally enclosed brushless DC motor designed to operate continuously.

Power rating should be 120 volts and 60Hz.

Fan shall be ETL and cETL listed for tub/shower enclosure when used with a GFCI branch circuit.

Motor comes with a built in overload disconnect for safety and longer motor life.

Our Premium series operates at lower RPM's to give you quieter operation.

Grille

Made of a rugged polymeric resin that's known for its long life durability.

Typical specification

Ceiling ventilator shall have corrosion resistance galvanized steel housing with 4 point mounting capability.

It shall be ducted to a roof vent or wall cap using 8 inch round pipe.

Blower assembly shall be removable, have a centrifugal type blower wheel and a permanently lubricated motor designed for continuous operation.

Air and sound delivery shall meet the HVI certified ratings as per the fan curves attached.



Reference	QTY.	Remarks	Project:
			Location:
			Architect:
			Engineer:
			Contractor:
			Submitted by:
			Date:

CERTIFICATIONS



SC Supreme Series

Model Number	SED400		SED500	
Static Pressure in inches w.g.	0.1	0.25	0.1	0.25
Air Volume (CFM)	400	390	500	480
Noise (sones)	3.0	3.0	4.0	N/A
Fan Watts	40W		66W	
Duct Diameter	6"			
Power Rating(V/Hz)	120/60			

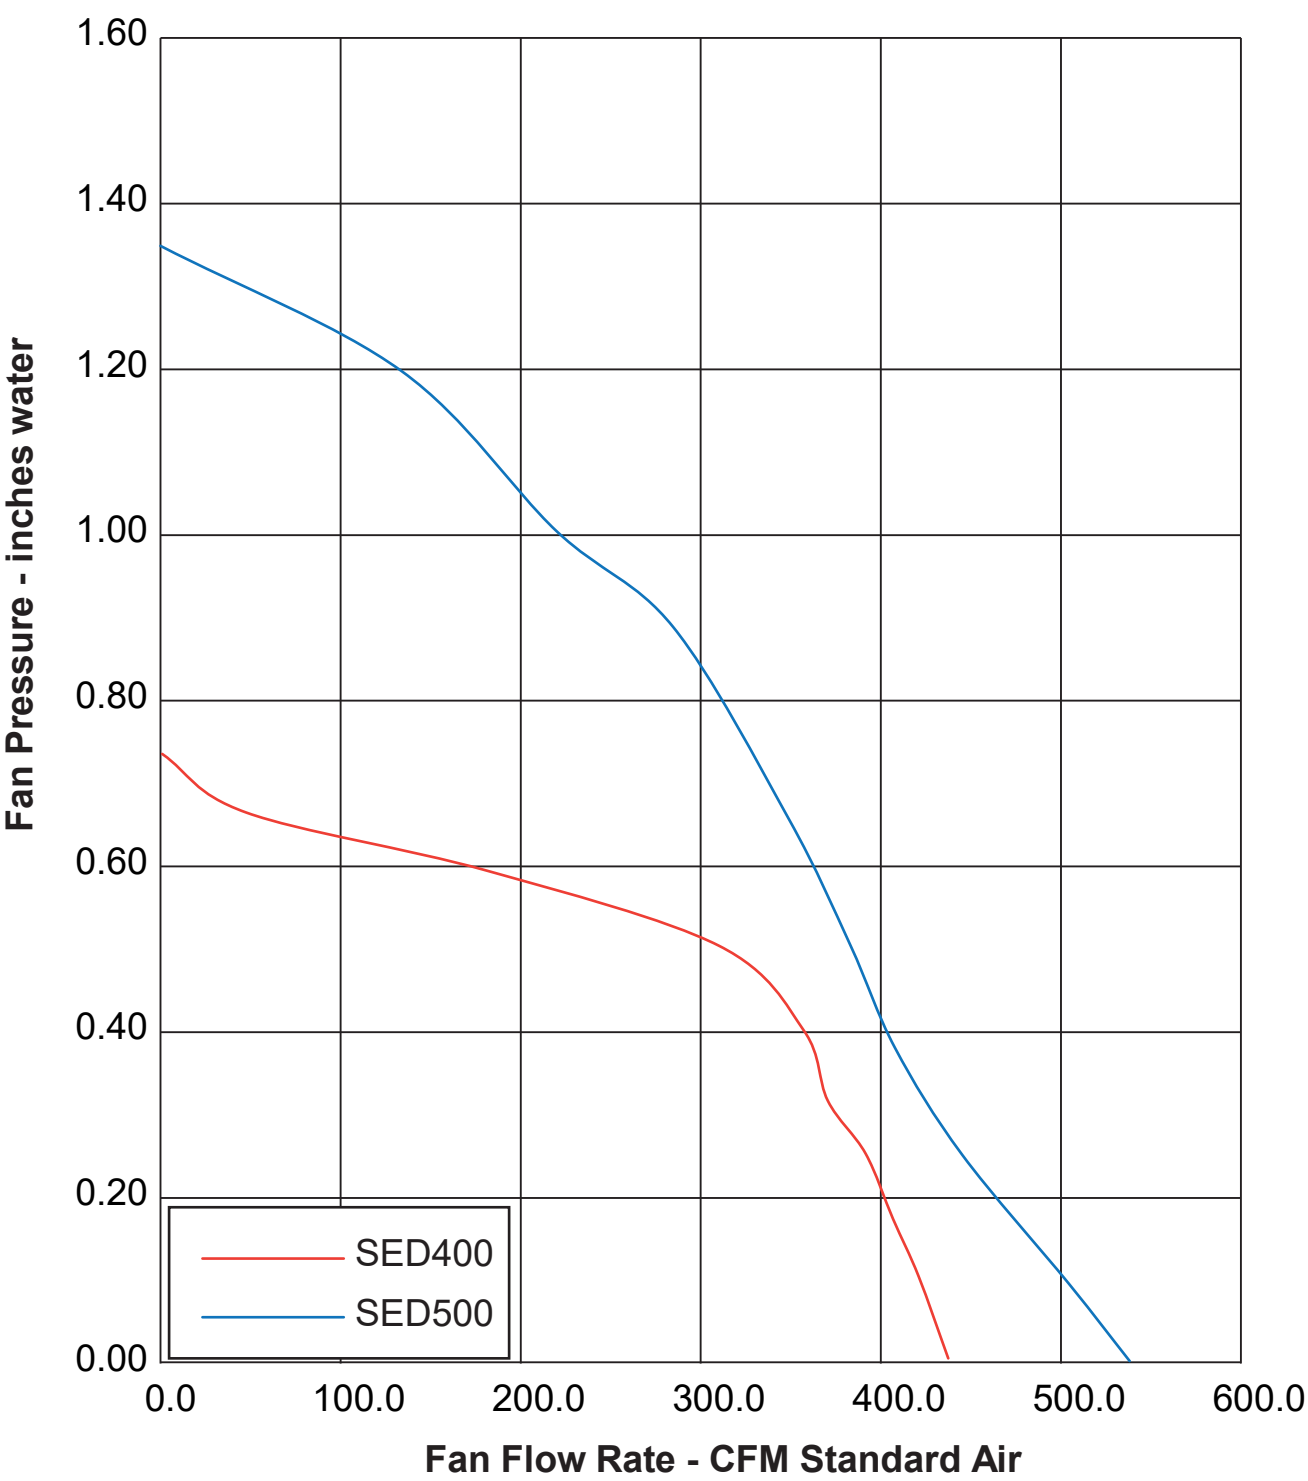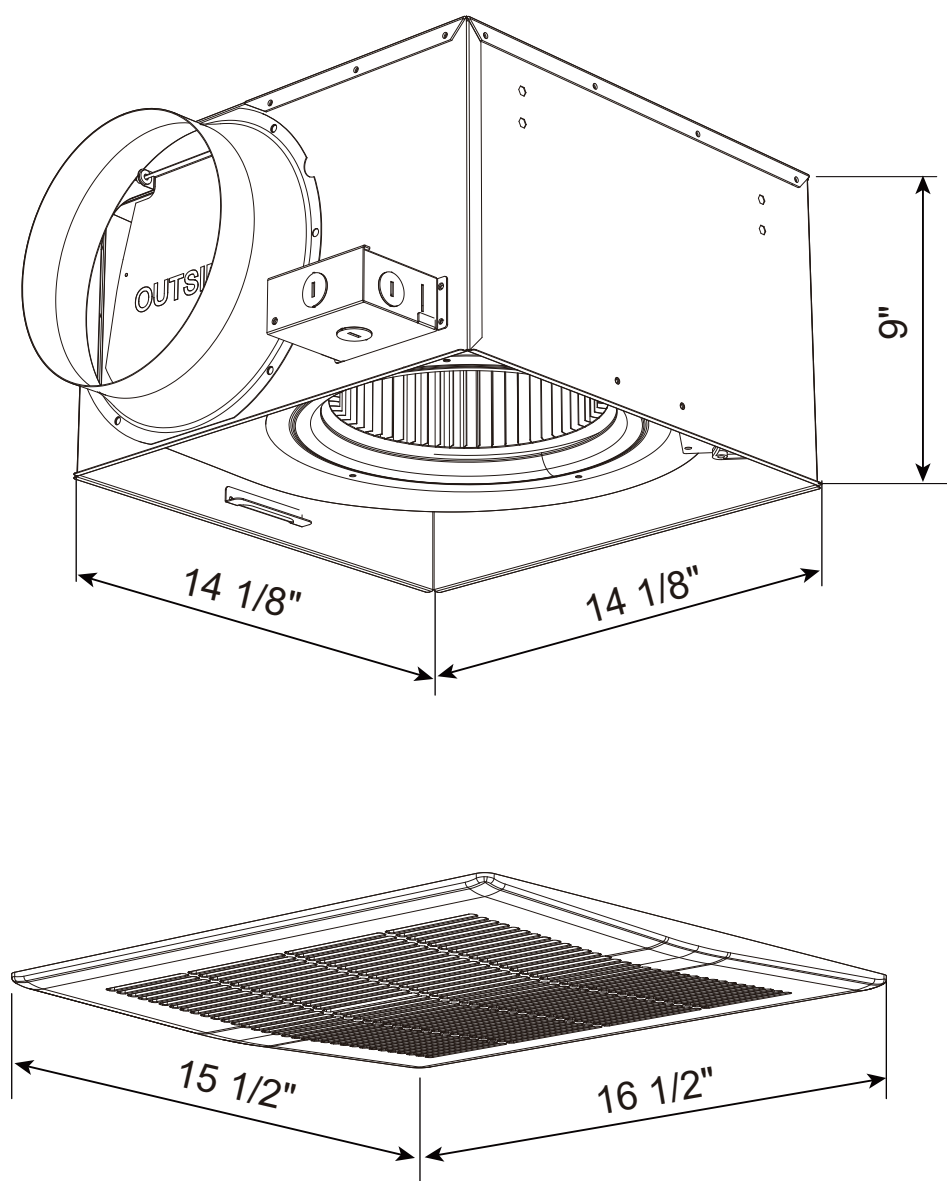

CERTIFICATIONS

