

MODEL	SP50	SP80	SP100
-------	------	------	-------

Ultra Silent, High Performance, Attractive Design Grille

Description

- Very quiet fan for ceiling or wall mounted Hold and ETL evaluation and confirm to UL and cUL safety standards. HVI and ENERGY STAR® certified.
- It comes with a capacitor start motor which is known for its high efficiency and long lasting reliability. It holds an ETL evaluation and conforms to UL and cUL safety standards.

Housing

- Made of rugged 26 GA galvanized steel
- Detachable 4 inch polymeric collar which includes a light weight built in back draft damper.
- Housing size: 7-1/2"x7-1/4"x5-5/8"

Motor/Blower

- Plug in permanently lubricated motor- Engineered for continuous operation.
- Power rating should be 120 volts and 60 Hz
- Motor comes with a built in overload disconnect for safety and longer motor life.

Grille

- The grille is low profile that has elegance and still able to maintain its simplicity.
- Grille dimension:8-3/4"x9-1/2".

Typical specification

- Ceiling ventilator shall have corrosion resistance galvanized steel.
- It shall be ducted to a roof vent or wall cap using 4 inch round pipe.
- Blower assembly shall be removable, have a centrifugal type blower wheel and a permanently lubricated motor designed for continuous operation.
- Includes an attachable non metallic collar with build in back draft damper.
- Air and sound delivery shall meet the ENERGY STAR, HVI certified ratings as per the fan curves attached.



Optional Fluorescent Light



Reference	QTY.	Remarks	Project:
			Location:
			Architect:
			Engineer:
			Contractor:
			Submitted by:
			Date:

CERTIFICATIONS



MODEL SP50 SP80 SP100

Model Number	SP50		SP80		SP100	
Static Pressure in inches w.g.	0.1	0.25	0.1	0.25	0.1	0.25
Air Volume (CFM)	50	42	80	72	100	89
Noise (sones)	0.4	N/A	1.0	N/A	2.0	N/A
Fan Watts	17W		22W		27W	
Duct Diameter	4"					
Power Rating(V/Hz)	120/60Hz					

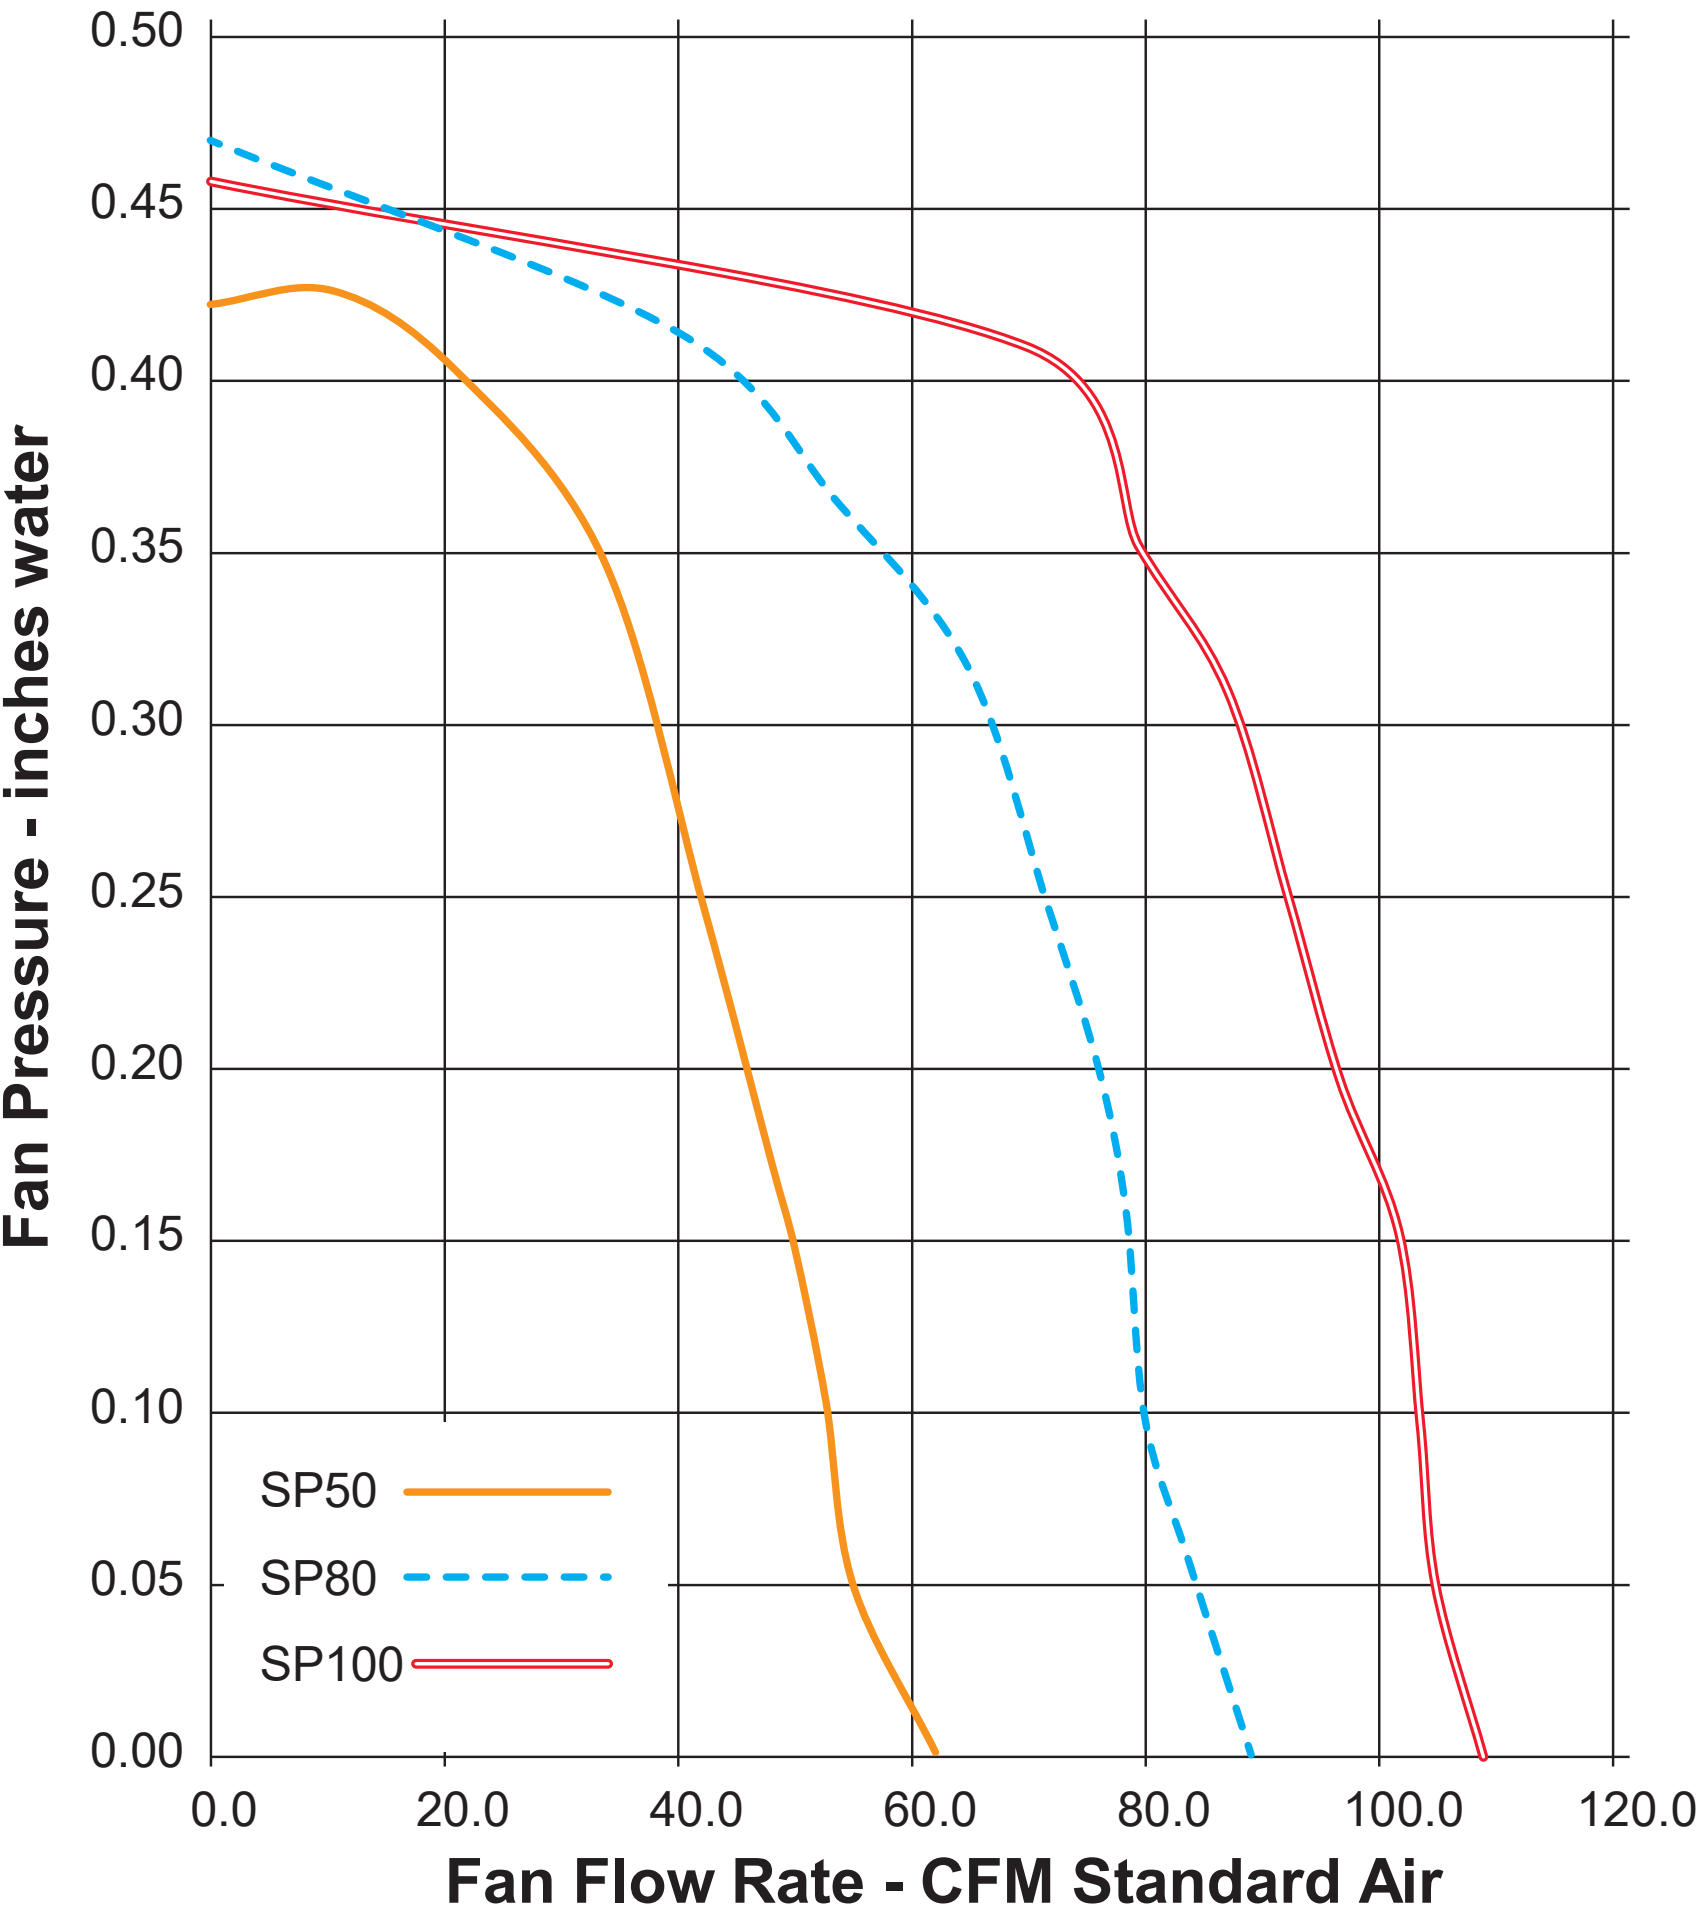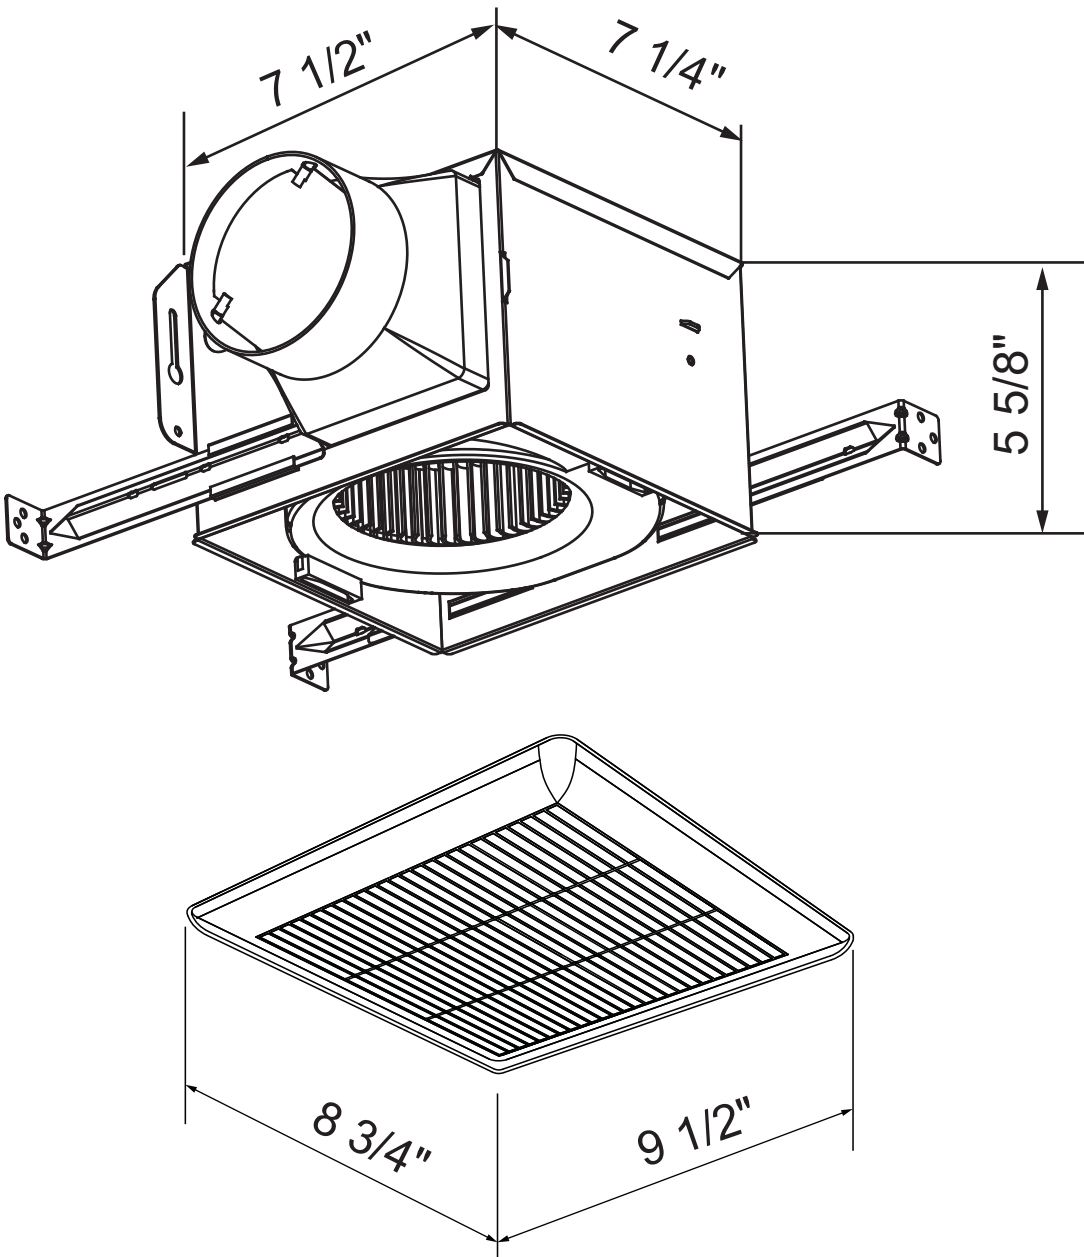

CERTIFICATIONS

