

**SEZ-AD18NL & SUZ-AA18NLHZ**  
**18,000 BTU/H LOW STATIC HORIZONTAL-DUCTED INDOOR UNIT**  
**18,000 BTU/H HYPER HEAT PUMP OUTDOOR UNIT**



Job Name:

System Reference:

Date:



Indoor Unit.....SEZ-AD18NL

Outdoor Unit.....SUZ-AA18NLHZ



#### INDOOR UNIT FEATURES

- Built-in condensate lift mechanism
- Concealed horizontal-ducted unit: Concealed horizontal-ducted unit for applications with short duct runs
- Multi-zone: A multi-zone unit provides the temperature management of multiple zones within a building.
- Multiple control options, including the comfort app for remote access, third-party interfaces, and both wired and wireless controllers
- Quiet operation: Quiet operation units are as quiet as a typical conversation, and most indoor units are whisper quiet.
- Ultra-thin body: 7-7/8" high

#### OUTDOOR UNIT FEATURES

- Blue Fin Coating: An anti-corrosion treatment applied to the aluminum fins of the heat exchanger of the outdoor unit to protect against corrosion caused by salt, sulfur, and other airborne contaminants, especially in coastal and industrial areas.
- Built-in base pan heater
- Hot-Start Technology: Hot-Start Technology ensures the fan only activates once the heat exchanger is warm, preventing cold air blasts during start-up.
- Hyper-Heating INVERTER® (H2i®): 100% heating capacity down to 5° F with guaranteed heating down to -13° F.
- Joint Lap DC Motor: Innovative Joint Lap DC Motor leads to high efficiency and reliability
- Outdoor unit directed power: The outdoor unit powers the indoor unit, and should a power outage occur, the system is automatically restarted when power returns
- Pulse Amplitude Modulation technology: Pulse Amplitude Modulation technology enhances energy efficiency by adjusting the power supply to optimize compressor performance, ensuring precise capacity control and reduced energy consumption.
- Quiet operation: Quiet operation units are as quiet as a typical conversation, and most indoor units are whisper quiet.

# SPECIFICATIONS: SEZ-AD18NL & SUZ-AA18NLHZ

|                              |                                               |                                      |                                                |
|------------------------------|-----------------------------------------------|--------------------------------------|------------------------------------------------|
| Cooling at 95F <sup>1</sup>  | Maximum Capacity                              | Btu/h                                | 18,000                                         |
|                              | Rated Capacity                                | Btu/h                                | 18,000                                         |
|                              | Minimum Capacity                              | Btu/h                                | 5,500                                          |
|                              | Maximum Power Input                           | W                                    | 1,400                                          |
|                              | Rated Power Input                             | W                                    | 1,400                                          |
|                              | Moisture Removal                              | Pints/h                              | 4                                              |
|                              | Sensible Heat Factor                          | -                                    | 0.75                                           |
| Heating at 47F <sup>2</sup>  | Power Factor [208V / 230V]                    | %                                    | 97 / 97                                        |
|                              | Maximum Capacity                              | Btu/h                                | 23,500                                         |
|                              | Rated Capacity                                | Btu/h                                | 20,000                                         |
|                              | Minimum Capacity                              | Btu/h                                | 8,400                                          |
|                              | Maximum Power Input                           | W                                    | 1,910                                          |
|                              | Rated Power Input                             | W                                    | 1,510                                          |
|                              | Power Factor [208V / 230V]                    | %                                    | 97 / 97                                        |
| Heating at 17F <sup>3</sup>  | Maximum Capacity                              | Btu/h                                | 20,000                                         |
|                              | Rated Capacity                                | Btu/h                                | 13,100                                         |
|                              | Maximum Power Input                           | W                                    | 2,610                                          |
|                              | Rated Power Input                             | W                                    | 1,370                                          |
| Heating at 5F <sup>4</sup>   | Maximum Capacity                              | Btu/h                                | 20,000                                         |
|                              | Maximum Power Input                           | W                                    | 2,790                                          |
| Heating at -13F <sup>5</sup> | Maximum Capacity                              | Btu/h                                | 12,100                                         |
| Efficiency                   | SEER2                                         |                                      | 17                                             |
|                              | EER2 <sup>1</sup>                             |                                      | 12.8                                           |
|                              | HSPF2 [IV]                                    |                                      | 10                                             |
|                              | COP at 47°F <sup>2</sup>                      |                                      | 3.8                                            |
|                              | COP at 17°F at Maximum Capacity <sup>3</sup>  |                                      | 2.24                                           |
|                              | COP at 5°F at Maximum Capacity <sup>4</sup>   |                                      | 2.1                                            |
|                              | COP at -13°F at Maximum Capacity <sup>5</sup> |                                      | 1.58                                           |
| Electrical                   | ENERGY STAR® Certified                        |                                      | No                                             |
|                              | Voltage, Phase, Frequency                     | V AC / V AC, ø, Hz                   | 208 / 230, 1, 60                               |
|                              | Guaranteed Voltage Range                      | V AC                                 | 198 - 253                                      |
|                              | Voltage: Indoor - Outdoor, S1-S2              | V AC                                 | 208/230                                        |
|                              | Voltage: Indoor - Outdoor, S2-S3              | V DC                                 | 12-24                                          |
|                              | Short-circuit Current Rating [SCCR]           | kA                                   | 5                                              |
|                              | Recommended Fuse/Breaker Size (Outdoor)       | A                                    | 30                                             |
| Indoor Unit                  | Recommended Wire Size [Indoor - Outdoor]      | AWG                                  | 14                                             |
|                              | MCA                                           | A                                    | 1.38                                           |
|                              | Fan Motor Output                              | W                                    | 96                                             |
|                              | Airflow Rate at Cooling, Dry                  | CFM                                  | 423, 529, 635                                  |
|                              | Airflow Rate at Heating, Dry                  | CFM                                  | 423, 529, 635                                  |
|                              | Sound Pressure Level [Cooling]                | dB (A)                               | 30, 34, 38                                     |
|                              | Sound Pressure Level [Heating]                | dB (A)                               | 30, 34, 38                                     |
|                              | External Static Pressure                      | in.WG                                | 0.02, 0.06, 0.14, 0.20                         |
|                              | Drain Pipe Size O.D.                          | inch [mm]                            | 1-1/4 [32]                                     |
|                              | Dual Barrier Coating on Heat Exchanger        |                                      | No                                             |
|                              | Unit Dimensions (W x D x H)                   | inch x inch x inch<br>[mm x mm x mm] | 46-7/8 x 27-9/16 x 7-7/8 [1,190 x 700 x 200]   |
|                              | Package Dimensions (W x D x H)                | inch x inch x inch<br>[mm x mm x mm] | 55-1/8 x 35-7/16 x 14-3/16 [1,400 x 900 x 360] |
|                              | Unit Weight                                   | lbs [kg]                             | 60 [27]                                        |
|                              | Package Weight                                | lbs [kg]                             | 84 [38]                                        |
|                              | Fan Motor Type                                |                                      | DC Motor                                       |
| IDU Operating Temp. Range    | Cooling Intake Air Temp [Maximum / Minimum]   | °FDB, °FWB / °FDB, °FWB              | 90, 73 / 66, 59                                |
|                              | Heating Intake Air Temp [Maximum / Minimum]   | °FDB                                 | 83 / 50                                        |

## NOTES

<sup>1</sup>Cooling at 95°F (Indoor: 80°F DB, 67°F WB // Outdoor: 95°F DB, 75°F WB)

<sup>2</sup>Heating at 47°F (Indoor: 70°F DB, 60°F WB // Outdoor: 47°F DB, 43°F WB)

<sup>3</sup>Heating at 17°F (Indoor: 70°F DB, 60°F WB // Outdoor: 17°F DB, 15°F WB)

<sup>4</sup>Heating at 5°F (Indoor: 70°F DB, 60°F WB // Outdoor: 5°F DB, 4°F WB)

<sup>5</sup>Heating at -13°F (Indoor: 70°F DB, 60°F WB // Outdoor: -13°F DB, -14°F WB)

<sup>\*</sup> Indoor/Outdoor Unit Operating Temperature Range (Cooling Air Temp [Maximum / Minimum]):

• Applications should be restricted to comfort cooling only; equipment cooling applications are not recommended for low ambient temperature conditions.

\*\* Outdoor Unit Operating Temperature Range (Cooling Thermal Lock-out / Re-start Temperatures; Heating Thermal Lock-out / Re-start Temperatures):

• System cuts out in heating mode and automatically restarts at these temperatures.

# SPECIFICATIONS: SEZ-AD18NL & SUZ-AA18NLHZ

|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                                                            |                                      |                                         |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------|--------------------------------------|-----------------------------------------|
| Outdoor Unit                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | MCA                                                        | A                                    | 25                                      |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | MOCP                                                       | A                                    | 42                                      |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | Fan Motor Output                                           | W                                    | 50                                      |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | Airflow Rate Cooling                                       | CFM                                  | 2,193                                   |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | Airflow Rate Heating                                       | CFM                                  | 1,949                                   |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | Defrost Method                                             |                                      | Reverse Cycle                           |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | Coating on Heat Exchanger (Bluefin, Sea Coast)             |                                      | Yes                                     |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | Sound Pressure Level, Cooling <sup>1</sup>                 | dB (A)                               | 54                                      |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | Sound Pressure Level, Heating <sup>2</sup>                 | dB (A)                               | 55                                      |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | Compressor Type                                            |                                      | Scroll                                  |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | Compressor Model                                           |                                      | SRB172FQHMT                             |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | Compressor Oil [Type // Charge]                            | Type // oz                           | RM68EH // 14.50                         |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | External Finish Color                                      |                                      | Munsell No.3Y 7.8/1.1                   |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | Base Pan Heater                                            |                                      | Not applicable                          |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | Unit Dimensions (W x D x H)                                | inch x inch x inch<br>[mm x mm x mm] | 33-1/16 x 13 x 34-5/8 [840 x 330 x 880] |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | Package Dimensions (W x D x H)                             | inch x inch x inch<br>[mm x mm x mm] | 38-5/8 x 16-9/16 x 39 [980 x 420 x 990] |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | Unit Weight                                                | lbs [kg]                             | 115 [52.2]                              |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | Package Weight                                             | lbs [kg]                             | 133 [60.3]                              |
| ODU Operating Temp. Range                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | Cooling Intake Air Temp [Maximum / Minimum*]               | °FDB                                 | 115 / 14                                |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | Cooling Thermal Lock-out / Re-start Temperatures**         | °FDB                                 | -1 / 3                                  |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | Heating Intake Air Temp [Maximum / Minimum]                | °FDB, °FWB / °FDB, °FWB              | 75, 65 / -13, -14                       |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | Heating Thermal Lock-out / Re-start Temperatures**         | °FDB                                 | -14 / -14                               |
| Refrigerant                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | Type                                                       |                                      | R454B                                   |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | Pre-Charged Refrigerant Amount                             | lbs                                  | 3                                       |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | Maximum Pre-Charged Piping Length                          | ft [m]                               | 25 [7.6]                                |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | Additional Refrigerant Charge Per Additional Piping Length | oz/ft                                | 0.22                                    |
| Piping                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | Gas Pipe Size O.D. [Flared]                                | inch [mm]                            | 1/2 [12.7]                              |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | Liquid Pipe Size O.D. [Flared]                             | inch [mm]                            | 1/4 [6.35]                              |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | Maximum Piping Length                                      | ft [m]                               | 100 [30]                                |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | Maximum Height Difference                                  | ft [m]                               | 50 [15]                                 |
| <b>NOTES</b><br><sup>1</sup> Cooling at 95°F (Indoor: 80°F DB, 67°F WB // Outdoor: 95°F DB, 75°F WB)<br><sup>2</sup> Heating at 47°F (Indoor: 70°F DB, 60°F WB // Outdoor: 47°F DB, 43°F WB)<br><sup>3</sup> Heating at 17°F (Indoor: 70°F DB, 60°F WB // Outdoor: 17°F DB, 15°F WB)<br><sup>4</sup> Heating at 5°F (Indoor: 70°F DB, 60°F WB // Outdoor: 5°F DB, 4°F WB)<br><sup>5</sup> Heating at -13°F (Indoor: 70°F DB, 60°F WB // Outdoor: -13°F DB, -14°F WB)<br>* Indoor/Outdoor Unit Operating Temperature Range (Cooling Air Temp [Maximum / Minimum]):<br>• Applications should be restricted to comfort cooling only; equipment cooling applications are not recommended for low ambient temperature conditions.<br>** Outdoor Unit Operating Temperature Range (Cooling Thermal Lock-out / Re-start Temperatures; Heating Thermal Lock-out / Re-start Temperatures):<br>• System cuts out in heating mode and automatically restarts at these temperatures. |                                                            |                                      |                                         |

# INDOOR UNIT ACCESSORIES: SEZ-AD18NL

|                                                                                                                                                                                                                              |                                                                                                          |                   |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------|-------------------|
| Wired Remote Controller                                                                                                                                                                                                      | Deluxe Wired MA Remote Controller                                                                        | PAR-42MAAUB       |
|                                                                                                                                                                                                                              | Simple Direct Wired Remote Controller                                                                    | PAC-SDW01RC-1     |
|                                                                                                                                                                                                                              | Simple MA Remote Controller <sup>1</sup>                                                                 | PAC-YT53CRAU-J    |
|                                                                                                                                                                                                                              | Touch MA Wired Remote Controller <sup>1</sup>                                                            | PAR-CT01MAU-SB    |
| Control Wire                                                                                                                                                                                                                 | 202PR 1PR shielded 1PR plenum wire for Airzone 100 ft reel                                               | CW2042S2-100      |
|                                                                                                                                                                                                                              | 202PR shielded 1PR plenum wire for Airzone 500 ft reel                                                   | CW2042S2-500      |
| Control Interface                                                                                                                                                                                                            | Airzone Wired Blueface Controller Black                                                                  | AZZBSBLUEZEROCN   |
|                                                                                                                                                                                                                              | Airzone Wired Blueface Controller White                                                                  | AZZBSBLUEZEROCB   |
|                                                                                                                                                                                                                              | Airzone Wired Lite Controller Black                                                                      | AZZBSLITECN       |
|                                                                                                                                                                                                                              | Airzone Wired Lite Controller White                                                                      | AZZBSLITECB       |
|                                                                                                                                                                                                                              | Airzone Wireless Lite Controller Black                                                                   | AZZBSLITERN       |
|                                                                                                                                                                                                                              | Airzone Wireless Lite Controller White                                                                   | AZZBSLITERB       |
|                                                                                                                                                                                                                              | Airzone Wireless Think Controller Black                                                                  | AZZBSTHINKRN      |
|                                                                                                                                                                                                                              | Airzone Wireless Think Controller White                                                                  | AZZBSTHINKRB      |
|                                                                                                                                                                                                                              | IT Extender for kumo station                                                                             | PAC-WHS01IE-E     |
|                                                                                                                                                                                                                              | kumo station for the Comfort app                                                                         | PAC-WHS01HC-E     |
|                                                                                                                                                                                                                              | Operation and Error Status Output Adapter <sup>1</sup>                                                   | PAC-SF40RM-E      |
|                                                                                                                                                                                                                              | Thermostat Interface for 3rd Party Thermostats                                                           | PAC-US445CN-1     |
| Lineset                                                                                                                                                                                                                      | Wireless Interface Adapter for the Comfort app                                                           | PAC-USWHS002-WF-2 |
|                                                                                                                                                                                                                              | 100 x 1/4 x 100 1/2 Lineset Twin-Tube Insulation                                                         | MLS141212T-100    |
|                                                                                                                                                                                                                              | 15 x 1/4 x 15 1/2 Lineset Twin-Tube Insulation                                                           | MLS141212T-15     |
|                                                                                                                                                                                                                              | 30 x 1/4 x 30 1/2 Lineset Twin-Tube Insulation                                                           | MLS141212T-30     |
|                                                                                                                                                                                                                              | 50 x 1/4 x 50 1/2 Lineset Twin-Tube Insulation                                                           | MLS141212T-50     |
|                                                                                                                                                                                                                              | 65 x 1/4 x 65 1/2 Lineset Twin-Tube Insulation                                                           | MLS141212T-65     |
| Remote Sensor                                                                                                                                                                                                                | Flush Mount Remote Temperature Sensor for SEZ SLZ SVZ and all P-Series models                            | PAC-USSEN002-FM-1 |
|                                                                                                                                                                                                                              | Wall Mount Remote Temperature Sensor                                                                     | PAC-SE41TS-E      |
|                                                                                                                                                                                                                              | Wireless temperature and humidity sensor for the Comfort app                                             | PAC-USWHS003-TH-1 |
| Condensate                                                                                                                                                                                                                   | Blue Diamond Advanced Mini Condensate Pump w Reservoir Sensor 208230V recommended                        | X87-721           |
|                                                                                                                                                                                                                              | Blue Diamond MaxiBlue Advanced Mini Condensate Pump w Reservoir Sensor 110V up to 48000 BTUH recommended | X87-711           |
|                                                                                                                                                                                                                              | Blue Diamond MegaBlue Advanced Condensate Pump w Reservoir Sensor                                        | X87-835           |
|                                                                                                                                                                                                                              | Blue Diamond MicroBlue Mini Condensate Pump 110208230V up to 18000 BTUH                                  | X86-003           |
|                                                                                                                                                                                                                              | Blue Diamond MultiTank collection tank for use with multiple pumps                                       | C21-014           |
|                                                                                                                                                                                                                              | Blue Diamond Sensor Extension Cable 15 Ft                                                                | C13-103           |
|                                                                                                                                                                                                                              | Refco Condensate Pump 100-240 VAC up to 120000 BTUH                                                      | COMBI             |
|                                                                                                                                                                                                                              | Sauermann Condensate Pump                                                                                | SI30-230          |
| Wireless Remote Controller                                                                                                                                                                                                   | Lockdown Bracket for Wireless Handheld Remote Controllers                                                | RCMKP1CB          |
|                                                                                                                                                                                                                              | RedLINK Wireless Remote Controller                                                                       | MHK2              |
|                                                                                                                                                                                                                              | Universal Wireless Receiver for PAR-FL32MA-E                                                             | PAR-FA32MA-W      |
|                                                                                                                                                                                                                              | Wireless Signal Receiver                                                                                 | PAR-SA9CA-E       |
| Power Supplies and Auxiliary Components                                                                                                                                                                                      | Backup Heat Relay Kit Adapter for CN24 or CN152 Connector                                                | CN24RELAY-KIT-CM3 |
| Power Supplies & Auxiliary Components                                                                                                                                                                                        | 3-Pin Wiring Harness                                                                                     | PAC-715AD         |
|                                                                                                                                                                                                                              | 5-Pin Wiring Harness                                                                                     | PAC-725AD         |
| Disconnect Switch                                                                                                                                                                                                            | 30A600VUL fits 2 X 4 utility box - Black                                                                 | TAZ-MS303         |
|                                                                                                                                                                                                                              | 30A600VUL fits 2 X 4 utility box - White                                                                 | TAZ-MS303W        |
| Filter Box                                                                                                                                                                                                                   | Filter Box with MERV 8 Filter                                                                            | FBL1-3            |
| NOTES<br><sup>1</sup> Requires MAC-334IF-E Interface to connect MA controller<br><sup>1</sup> Unable to use with Wireless Handheld Remote Controller<br><sup>1</sup> Requires MAC-334IF-E Interface to connect MA controller |                                                                                                          |                   |


## OUTDOOR UNIT ACCESSORIES: SUZ-AA18NLHZ

|                      |                                                     |                |
|----------------------|-----------------------------------------------------|----------------|
| Mini-Split Wire      | 14 Gauge 4 wire Armored MiniSplit Cable250 ft roll  | SW144-250      |
|                      | 14 Gauge 4 wire Armored MiniSplit Cable50 ft roll   | SW144-50       |
|                      | 14 Gauge 4 wire MiniSplit Cable250 ft roll          | S144-250       |
|                      | 14 Gauge 4 wire MiniSplit Cable50 ft roll           | S144-50        |
| Stand                | 18 Single Fan Stand                                 | QSMS1801M      |
|                      | 24 Single Fan Stand                                 | QSMS2401M      |
|                      | Condenser Wall Bracket - Stainless Steel Finish     | QSWBSS         |
|                      | Condenser Wall Bracket                              | QSWB2000M-1    |
|                      | Outdoor Unit 3-14 inch Mounting Base Pair - Plastic | DSD-400P       |
|                      | Outdoor Unit Stand 12 High                          | QSMS1201M      |
| Drain Socket         | Drain Socket                                        | MAC-871DS      |
| Muffler              | Muffler for Connection to MFZ-KX                    | MAC-002MF-E    |
| Control/Service Tool | M- & P-Series Maintenance Tool Cable Set            | M21EC0397      |
|                      | Maintenance Tool Interface                          | PAC-USCMS-MN-1 |
| Air Outlet Guide     | Air Outlet Guide                                    | MAC-886SG-E    |
| Snow/Rain Diverter   | SnowRain Diverter                                   | SRD-3          |
| Mounting Pad         | Condensing Unit Mounting Pad 16 x 36 x 3            | ULTRILITE1     |
| NOTES                |                                                     |                |



# OUTDOOR UNIT DIMENSIONS: SUZ-AA18NLHZ

## REQUIRED SPACE

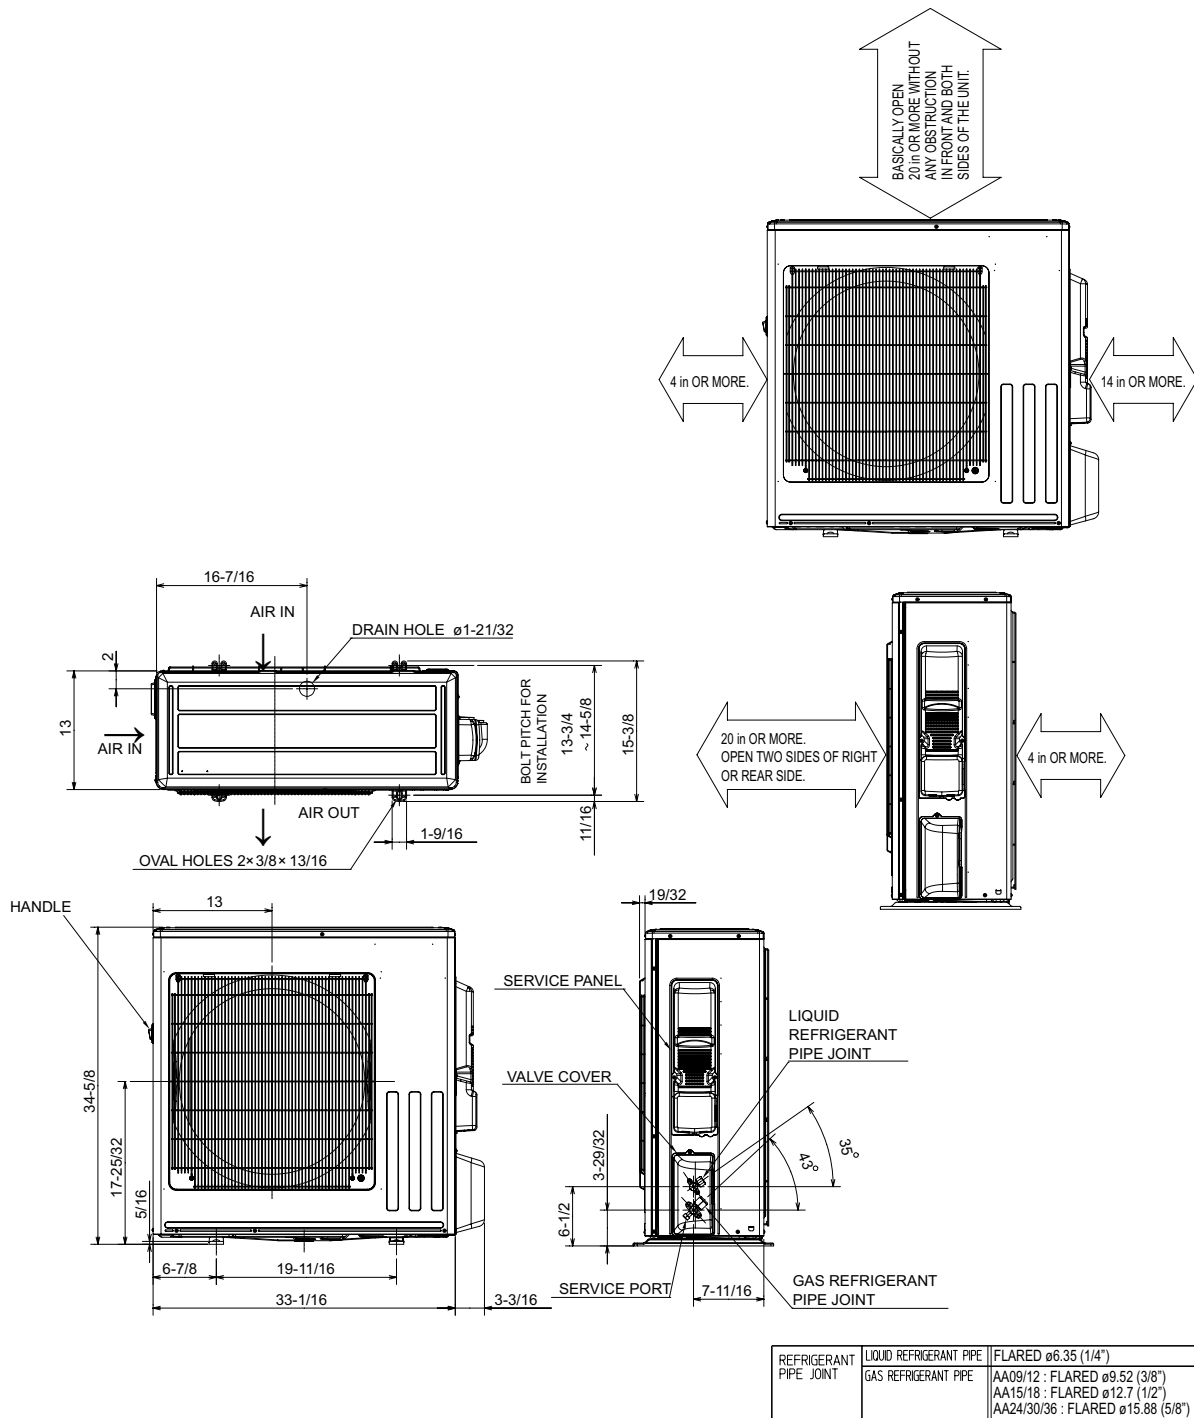

1340 Satellite Boulevard Suwanee, GA 30024  
Toll Free: 800-433-4822 <https://mitsubishicomfort.com>



METUS\_2025-05\_PROPIN