

VISIT [ACIQ.COM](http://ACIQ.COM)

**ACIQ**

## Single Zone Mini Split Systems

The Future of HVAC is Here

Use the QR code to go directly to [ACIQ.com](http://ACIQ.com)





## Contact Today

Phone: 1-877-909-ACiQ

Email: [Contact@ACiQ.com](mailto:Contact@ACiQ.com)

Website: [ACiQ.COM](http://ACiQ.COM)



## Table of Contents

How to Read ACiQ Model Numbers	3
Key Features	4-5
Single Zone Systems: Essentials Series	6-7
Single Zone Systems: Standard Series	8
Single Zone Outdoor Units: Extreme Heat Series	9
Single Zone Extreme Heat Air Handler Line Up	10
Single Zone Indoor Units	11-15
Warranty Information	16

## Why ACiQ?

ACiQ delivers cutting-edge comfort solutions designed to provide exceptional comfort, efficiency, and reliability, wherever you are. Our systems are engineered with advanced technology that maximizes energy savings without sacrificing performance. When customers choose ACiQ, they enjoy whisper-quiet operation, durable construction, and smart features that adapt to their lifestyle. Affordability is at the core of our mission, making superior comfort accessible to all. With an industry-leading warranty, ACiQ is not just a brand; its comfort made with you in mind.

## How to Read ACiQ Model Numbers

### Outdoor Units

Sample Numbers: **ACiQ** - **K09ZPL** - **HP230B**

Brand
BTU output
Series
Voltage

Essentials
Condenser
Heat Pump
Version

Variants of certification: **PL**-Extreme Series; **S**-Standard Series

---

### Indoor Units

Sample Numbers: **ACiQ** - **K09W** - **HH** - **MB**

Brand
BTU output
Multizone
Version

Essentials
Type of Air Handler
Version

Variant of Air Handler: **W**-Wall mount; **CD**-Concealed Duct; **CC**-Ceiling Cassette  
**FM**-Floor mount; **SCC**-Slim Ceiling Cassette

Variant of Color: **W**-White; **BL**-Black




# Key Features



01 Turn Any Non-Air-Conditioned Space Into A Comfortable Living Environment.

## 02 Inverter Technology

Air conditioning units equipped with an inverter variable-speed compressor consume significantly less energy and operate noticeably quieter than traditional systems. By smoothly adjusting output to match the exact cooling or heating demand, the inverter avoids the frequent on-off cycling that wastes energy and strains components. This optimization translates into lower monthly utility bills and substantial long-term savings for homeowners.

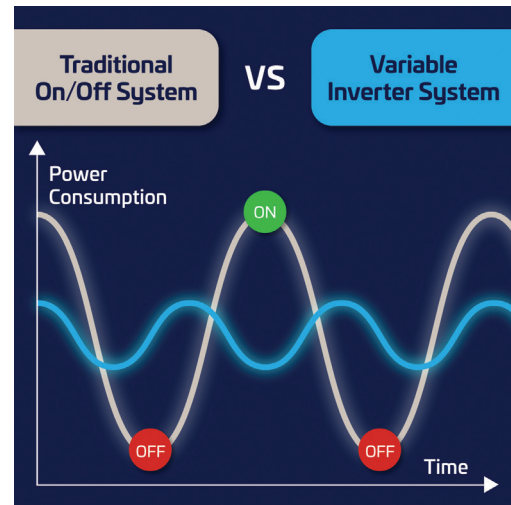

## 03 Protective Fin Technology

ACiQ offers advanced protective coatings tailored to its product lines for enhanced durability and performance. The Blue Fin Coating, featured on our Essentials Series, provides reliable protection against wear and environmental damage. For our Standard and Extreme Series, the Gold Fin Coating delivers superior defense against corrosive elements, forming a robust anti-corrosion layer to extend system life and maintain exceptional heat transfer properties. With these coatings, every ACiQ system is designed for lasting efficiency and reliability.




## 04 Leak Detection

Cut maintenance costs by using leak detection technology, identifying issues early to streamline maintenance calls. Swift resolution not only saves time but prevents larger HVAC problems. Prioritize systems with this feature for cost savings and system longevity.

## 05 ACiQ Home App

Gain complete control over your entire home directly from your smartphone. Fine-tune settings, manage airflow, and adjust temperatures effortlessly using the ACiQ Home App. Experience advanced home control at your fingertips, making it easier than ever to create a personalized and comfortable living environment tailored to your preferences.



## 06 Ultra Low Temperature Operation

Eliminates frost on the outdoor coil during low ambient temperatures while concurrently stopping the indoor fan to prevent the circulation of cold air into the controlled space. The system works in sub-zero temperatures and keeps from freezing or sending cold air into your house.

## 07 Intelligent Remote Display

Each indoor unit includes a smart remote with an intelligent display for effortless control. Manage settings, airflow, and temperature with ease, and even diagnose potential issues directly from the intuitive display. This user-friendly interface provides comprehensive control and troubleshooting capabilities, ensuring a hassle-free experience in optimizing your indoor environment.

# Single Zone Systems

## Essentials Series: R32

The ACiQ Essentials Single Zone Mini Split Systems with R32 refrigerant deliver strong cooling and heating performance with excellent energy efficiency. R32's superior heat-transfer capability allows faster more responsive cooling while using less energy. With a high operating efficiency, these systems provide dependable year-round comfort and reduced energy costs.



## Essentials Series: R454B

The ACiQ Essentials Single Zone Mini Split Systems using R454B refrigerant offer reliable, efficient comfort while meeting next-generation environmental standards. R454B supports balanced system performance through stable refrigerant flow and consistent heating and cooling output. Delivering dependable comfort across all seasons, these systems provide an efficient, cost-conscious solution for homeowners.



ACiQ Essentials		Single-Zone Mini Split -R32				
Indoor Air Handler		ACIQ-KE12W-W-HP115B	ACIQ-KE12W-W-HP230B	ACIQ-KE18W-W-HP230B	ACIQ-KE24W-W-HP230B	ACIQ-KE36W-W-HP230B
Outdoor Unit		ACIQ-KE12Z-HP115B	ACIQ-KE12Z-HP230B	ACIQ-KE18Z-HP230B	ACIQ-KE24Z-HP230B	ACIQ-KE36Z-HP230B
System Performance						
Power Supply	V, Hz, Ph	115V~/60Hz/1P		208/230V~/60Hz/1P		
Rated Cooling Capacity @ 95°F	Btu/h	11500	17000	23000	35000	
Rated Heating Capacity @ 47°F	Btu/h	11500	16500	22400	35400	
SEER2 / EER2 @ 95°F	Btu/W.h	17 / 9.5				
HSPF2 Rating (Region IV / Region V)	Btu/W.h	9.5 / 8.1	8.5 / 7.1	8.5 / 7.2	9.5 / 8.5	8.5 / 7.5
COP2 @ 47°F	W/W	3.3	3.2	3.3		
Cooling Capacity Range	°F	53.6°F-122°F				
Heating Capacity Range	°F	5°F-86°F				
Estimated Coverage Area	sq.ft	Up to 280		Up to 380	Up to 480	Up to 646
Indoor Noise Level (Turbo/Hi/Med/Lo/Mute)	dB(A)	43/40/36/33/29	45/42/39/35/33	49/45/40/34/32	50/48/46/40/37	55/52/46/41/39
Min. Circuit Ampacity	A	17	11	12	17	23
Max Fuse Size	A	25	15	20	25	35
Connecting Wiring	Size x Core Number	4x16 AWG				
Wi-Fi Included		YES				
Line Set						
Max Line Set Length	ft.	49		65	98	
Max. Height Difference (Between Indoor & Outdoor Units)	ft.	33		49	65	
Additional Refrigerant Charge	oz/ft.	0.11				
LIMITED WARRANTY		6-year compressor & 4-year parts - with online register				

ACiQ Essentials		Single-Zone Mini Split -R454B							
Indoor White Air Handler	White Air Handler	ACIQ-K09W-W-HP115B	ACIQ-K09W-W-HP230B	ACIQ-K12W-W-HP115B	ACIQ-K12W-W-HP230B	ACIQ-K18W-W-HP230B	ACIQ-K24W-W-HP230B	ACIQ-K36W-W-HP230B	
Indoor Black Air Handler	Black Air Handler	ACIQ-K09W-BL-HP115B	ACIQ-K09W-BL-HP230B	ACIQ-K12W-BL-HP115B	ACIQ-K12W-BL-HP230B	ACIQ-K18W-BL-HP230B	ACIQ-K24W-BL-HP230B	ACIQ-K36W-BL-HP230B	
Outdoor Unit		ACIQ-K09Z-HP115B	ACIQ-K09Z-HP230B	ACIQ-K12Z-HP115B	ACIQ-K12Z-HP230B	ACIQ-K18Z-HP230B	ACIQ-K24Z-HP230B	ACIQ-K36Z-HP230B	
System Performance									
Power Supply	V, Hz, Ph	115V~/60Hz/1Ph	208/230V~/60Hz/1Ph	115V~/60Hz/1Ph	208/230V~/60Hz/1Ph	208/230V~/60Hz/1Ph	208/230V~/60Hz/1Ph	208/230V~/60Hz/1Ph	
Rated Cooling Capacity (95°F / 35°C)	Btu/h	9000		12000		18000	24000	36000	
Rated Heating Capacity (47°F / 8.3°C)	Btu/h	10000		12000		19000	24600	36000	
SEER2 / EER2	Btu/W.h.	19.0 / 11.7	20 / 12	20.5 / 10.5	20 / 11.2	21 / 11		19 / 9.0	
HSPF2 Rating (Region IV / Region V)	Btu/W.h.	9.5 / 8.2	10 / 8.5	9.5 / 8.2			9 / 7.7		
COP2 (47°F/8.3°C) / (5°F/-15°C)	W/W	3.81 / 2	3.81 / 2.1	3.41 / 1.8		3.41 / 1.8	3.41 / 2.1	3.15 / 2.1	
Cooling Temperature Range	°F	5° - 122°							
Heating Temperature Range	°F	-4° - 86°							
Estimated Coverage Area	sq. ft.	up to 400			up to 550		up to 1000	up to 1500	up to 2500
Noise Level (dependent on selected fan speed)	dB(A)	28 - 42	29 - 43	28 - 45		32 - 49	36 - 52		
Min. Circuit Ampacity (MCA)	A	16	10	17	11	12	17	18	
Max. Fuse Size	A	25	15	25	15	20	25	30	
Connecting Wiring	Size x Core Number	4 x 16 AWG							
WiFi Included		YES							
Line Set									
Max. Line Set Length	ft.	49			65		98		
Max. Height Difference (Between Indoor & Outdoor Units)	ft.	33			49		65		
Additional Refrigerant Charge	oz/ft.	0.11							
LIMITED WARRANTY		6-year compressor & 4-year parts - with online register							

# Single Zone Systems



## Standard Series

ACIQ's Single-Zone Wall Mount Mini Splits—a sleek solution for personalized comfort. Available in sizes up to 36,000 BTU and boasting efficiency up to 24 SEER, these units blend power with energy savings. With built-in WiFi, control your climate effortlessly. Elevate your space with ACIQ's cutting-edge technology.

System Type	Standard Series								
Indoor Air Handler	ACIQ-09WS-HP115C	ACIQ-12WS-HP115C	ACIQ-09WS-HP230C	ACIQ-12WS-HP230C	ACIQ-18WS-HP230C	ACIQ-24WS-HP230C	ACIQ-30W-HP230C	ACIQ-36W-HP230C	
Outdoor Unit	ACIQ-09ZS-HP115C	ACIQ-12ZS-HP115C	ACIQ-09ZS-HP230C	ACIQ-12ZS-HP230C	ACIQ-18ZS-HP230C	ACIQ-24ZS-HP230C	ACIQ-30Z-HP230C	ACIQ-36Z-HP230C	
<b>System Performance</b>									
Power Supply	V, Hz, Ph	115V~/60Hz/1Ph			208/230V~/60Hz/1Ph				
Rated Cooling Capacity (95°F / 35°C)	Btu/h	9000 (2600-13000)	12000 (2600-13000)	9000 (3100-10900)	12000 (2600-13700)	18000 (3600-20000)	24000 (9700-27000)	30000 (6200-33700)	36000 (2900-36200)
Rated Heating Capacity (47°F / 8.3°C)	Btu/h	10000 (4500-12800)	12000 (4500-12800)	10000 (4200-14200)	12000 (4100-14400)	18000 (7600-22000)	25000 (11300-32700)	30000 (11800-30900)	36000 (3600-36600)
SEER2 / EER2	Btu/Wh.	24.5 / 15.0	23.2 / 12.5	24.6 / 14.7	23.1 / 12.2	24.0 / 13.5	23.5 / 13	20 / 11	18 / 9
HSPF2 Rating (Region IV / Region V)	Btu/Wh.	10.7 / 8.2	10.4 / 7.6	13.0 / 9.5	11.5 / 8.5	11.1 / 8.3	10.0 / 7.7	9.2 / 6.9	8.5 / 6.8
COP	W/W	4.20	3.70	3.66	3.69	3.81	3.08	3.03	2.82
Operating Temperature Range (Cooling)	°F	-13-122							
Operating Temperature Range (Heating)	°F	-13-75							
Min./Max. Indoor Airflow	CFM	141.3-370.8	141.3-370.8	153.0-382.6	153.0-382.6	370.8-759.3	382.6-759.3	353.2-853.5	400.2-882.9
Min./Max. Indoor Noise Level	dB(A)	17.5-44	17.5-44	19.5-45.5	19-46	20-54	20.5-54	27-57	28-56.5
Min. Circuit Ampacity (MCA)	A	18.0	18.0	12.0	12.0	18.0	24.0	28.0	33.0
Max. Fuse Size	A	20		15		20	25	30	35
Connecting Wiring	Size x Core Number	14#x4							
WiFi Included		YES							
<b>Line Set</b>									
Max. Pipe Length	ft.	82.00			98.40		164.00		213.20
Max. Height Difference (Between Indoor & Outdoor Units)	ft.	49.20			65.6		82		98.4
Piping/Connection Size (Liquid Side / Gas Side)	in	1/4" / 3/8"			1/4" / 1/2"		3/8" / 5/8"		
R454B Refrigerant Charge Amount	oz	33.51	33.51	32.45	32.45	47.97	70.55	84.66	112.88
Additional Charge	oz/ft.	0.16			0.32				
LIMITED WARRANTY		12-year compressor & 7-year parts - with online register							

# Single Zone Outdoor Units



Standard Systems  
Outdoor Units



## Extreme Series

Tailored for the coldest and hottest climates, the Extreme Models from ACIQ are the ideal solution. Regardless of your situation, our Single Zone Mini Split Systems can be customized to meet your specific needs. The Extreme Series Condensers take efficiency to new heights, extracting heat in temperatures as low as -22 °F, while ensuring effective cooling performance even in scorching temperatures of up to 122 °F.

System Type	Extreme Series								
Outdoor Unit	ACIQ-06ZPL-HP230C*	ACIQ-09ZPL-HP230C*	ACIQ-12ZPL-HP230C*	ACIQ-18ZPL-HP230C*	ACIQ-24ZPL-HP230C**	ACIQ-36ZPL-HP230C**	ACIQ-48ZPL-HP230C**	ACIQ-60ZPL-HP230C**	
Power Supply	V, Ph, Hz	208-230V / 1Ph / 60Hz							
Cooling Capacity	Btu/h	6000 (2300-12600)	9000 (3800-13500)	12000 (3800-14600)	18000 (8800-19200)	24000 (12600-27900)	36400 (6100-38300)	48000 (6700-53500)	54000 (20000-54500)
Heating Capacity	Btu/h	7000 (3000-11000)	12000 (3800-16000)	12000 (3800-16000)	18000 (11200-19500)	29000 (11800-29700)	38000 (11100-45400)	52000 (18800-58700)	60000 (21700-65500)
SEER2 / EER2		25.5 / 18	27.4 / 15.4	25.4 / 13.4	21.4 / 12.5	21 / 13	20 / 12	18.5 / 9.4	18 / 9
HSPF2-4 / COP		14.8 / 4.2	12.5 / 3.76	10.5 / 3.76	11 / 3.26	13.5 / 3.42	10.8 / 3.29	10.1 / 2.86	10.7 / 3.02
Energy Star		YES							
Operating Temperature Range (Cooling)	°F	-22-122							
Heating Temperature Range (Heating)	°F	-22-75							
Outdoor Unit Airflow	CFM	1235.3	1470.6	1470.6	1764.7	2235.3	3001.9	4237.9	4237.9
Outdoor Unit Noise Level	dB(A)	53	56	56	59	61.5	65	64.5	64.5
Outdoor Unit Dimensions (WxDxH)	in	30.12 x 11.93 x 21.85	31.69 x 12.99 x 21.81		35.04 x 13.46 x 26.50	37.24 x 16.14 x 31.89	38.58 x 16.34 x 38.39		37.48 x 16.34 x 52.48
Net Weight / Gross Weight	lbs	62.17 / 67.68	72.75 / 78.70	72.75 / 78.70	99.87 / 107.80	130.29 / 141.31	206.57 / 237.44	208.78 / 239.86	230.38 / 261.69
<b>Refrigerant Piping</b>									
Refrigerant Charge: R454B	oz	32.45	35.27		55.38	63.49	126.99	151.68	
Additional Charge	oz/ft	0.16			0.32				
Piping/Connection Size (Liquid Side / Gas Side)	in		1/4" / 3/8"		1/4" / 1/2"	3/8" / 5/8"		3/8" / 3/4"	
Pipe Length (Max)	ft		82		98.4	164		246	
Max. Height Difference (Between Indoor & Outdoor Units)	ft		49.20		65.60	82.0		98.4	
LIMITED WARRANTY		12-year compressor & 7-year parts - with online register							

\* Performance ratings & specifications for 6K-24K Extreme Heat Condenser are based on each condenser tested with a wall-mounted air handler of matching capacity.

\*\* Performance ratings & specifications of 36K-60K Extreme Heat Condenser are based on each condenser tested with a floor/ceiling mounted air handler of matching capacity.

# Single Zone Extreme Heat Air Handler Line Up



	6,000	9,000	12,000	18,000	24,000	36,000	48,000	60,000
Wall Mount	ACIQ-06W-HH-MD 	ACIQ-09W-HH-MD 	ACIQ-12W-HH-MD 	ACIQ-18W-HH-MD 	ACIQ-24W-HH-MD 			
Ceiling Cassette		ACIQ-09CC-HH-MC 	ACIQ-12CC-HH-MC 	ACIQ-18CC-HH-MC 	ACIQ-24CC-HH-MC 	ACIQ-36CC-HH-MC 	ACIQ-48CC-HH-MC 	
Slim Ceiling Cassette	SCC-0612-HH-MB 	SCC-0612-HH-MB 	SCC-0612-HH-MB 	SCC-18-HH-MB 				
Concealed Duct		ACIQ-09CD-HH-MC 	ACIQ-12CD-HH-MC 	ACIQ-18CD-HH-MC 	ACIQ-24CD-HH-MC 	ACIQ-36CD-HH-MC 	ACIQ-48CD-HH-MC 	ACIQ-60CD-HH-MC 
Floor Mount	ACIQ-09FM-HH-MD 	ACIQ-12FM-HH-MD 	ACIQ-18FM-HH-MD 	ACIQ-24FM-HH-MD 	ACIQ-36FM-HH-MD 	ACIQ-48FM-HH-MD 	ACIQ-60FM-HH-MD 	

PG#010

# Single Zone Indoor Units

Air Handler Line Up  
Indoor Units



## Wall Mount


ACIQ's Wall Mount Air Handlers combine precision engineering with innovative technology to deliver stylish, space-efficient climate control. Featuring a sleek modern design and advanced performance capabilities, these units maximize your space while providing exceptional temperature accuracy for year-round comfort.

System Type	Wall Mount				
Indoor Air Handler	ACIQ-06W-HH-MD	ACIQ-09W-HH-MD	ACIQ-12W-HH-MD	ACIQ-18W-HH-MD	ACIQ-24W-HH-MD
Power Supply	V, Ph, Hz 208 / 230V, 1 Ph, 60Hz				
Noise Level	dB(A) 19.5 - 44	19.5 - 38	19.5 - 47	19.5 - 49.5	16 - 54.5
Airflow	CFM 147.2 - 382.6	147.2 - 441.4	147.2 - 441.4	294.3 - 635.7	317.8 - 812.3
SEER2 / EER2	Btu/W 25.5 / 18	27.4 / 15.4	25.4 / 13.4	21.4 / 12.5	21 / 13
HSPF2-4 / COP	Btu/W 14.8 / 4.2	12.5 / 3.76	10.5 / 3.76	11 / 3.26	13.5 / 3.42
Unit Dimensions (WxDxH)	in 33.40 x 9.18 x 11.76		40.06 x 9.72 x 12.6		
Net Weight / Gross Weight	lbs 22.93 / 29.32	23.37 / 29.98	22.93 / 29.32	27.34 / 36.6	43.65 / 55.56
Cooling Btu	Btu 6000 (2300 - 12600)	9000 (3800 - 13500)	12000 (3800 - 14600)	18000 (8800 - 19400)	24000 (12600 - 27900)
Heating Btu	Btu 7000 (3000 - 11000)	12000 (3800 - 16000)	12000 (3800 - 16000)	18000 (11200 - 19500)	29000 (11800 - 29700)
Compatible Outdoor Unit	ACIQ-06ZPL-HP230C	ACIQ-09ZPL-HP230C	ACIQ-12ZPL-HP230C	ACIQ-18ZPL-HP230C	ACIQ-24ZPL-HP230C
WiFi Included	YES				



PG#011

# Single Zone Indoor Units

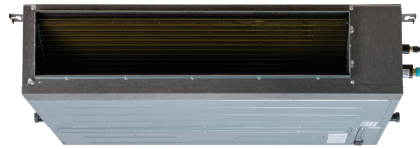

## Concealed Duct

ACiQ's Concealed Duct Air Handler seamlessly combines discreet aesthetics with powerful climate control, hidden above ceilings for balanced heating and cooling with customizable zoning. Offering reduced noise levels and versatile installation options, these units provide a sophisticated and space-saving solution for elevated comfort in any setting.

System Type	Concealed Duct							
Indoor Air Handler	ACiQ-09CD-HH-MC	ACiQ-12CD-HH-MC	ACiQ-18CD-HH-MC	ACiQ-24CD-HH-MC	ACiQ-36CD-HH-MC	ACiQ-48CD-HH-MC	ACiQ-60CD-HH-MC	
Power Supply	V, Ph, Hz 208/230V, 1 Ph, 60Hz							
Noise Level	dB(A) 26.0-29.5	26.0-32.5	28.0-36	29.5-40.0	31-45	40-51	41-52	
Air Flow	CFM 121.8-344.3	1354-4191	441.4-706.3	500.3-853.5	765.2-1236.1	1059.5-1648.1	1118.3-2001.2	
SEER2 / EER2	Btu/W 20.5 / 14	20 / 12	18.4 / 12	19 / 12	17.7 / 12	16.7 / 10.4	15.8 / 10.2	
HSPF2-4 / COP	Btu/W 13.8 / 3.88	10.6 / 3.63	11.1 / 3.60	11.7 / 3.81	11.1 / 3.80	10.8 / 3.60	10.4 / 3.74	
Dimensions (WxDxH)	in 27.56 x 29.53 x 9.65	39.37 x 29.53 x 9.65		47.24 x 29.53 x 11.81		55.12 x 31.50 x 14.96		
Net Weight / Gross Weight	lbs 64.15 / 73.85	79.81 / 91.27		80.47 / 91.93		106.26 / 120.37		111.33 / 124.78 161.38 / 178.13
Cooling Btu	Btu 9000 (3000-13100)	12000 (3000-13300)	17500 (4000-20600)	24000 (5000-28000)	36000 (9800-37000)	48000 (11000-56500)	55000 (14200-60000)	
Heating Btu	Btu 9900 (3900-16500)	12000 (3900-16500)	19500 (5400-23000)	26000 (7300-31400)	42000 (11000-45500)	52000 (11200-60000)	60000 (11200-66000)	
Compatible Outdoor Unit	ACiQ-09ZPL-HP230C	ACiQ-12ZPL-HP230C	ACiQ-18ZPL-HP230C	ACiQ-24ZPL-HP230C	ACiQ-36ZPL-HP230C	ACiQ-48ZPL-HP230C	ACiQ-60ZPL-HP230C	
WiFi Included	WiFi Controller Included							



## Ceiling Cassette

Mini Split systems are great, but what if you don't want the air handler on your wall? ACiQ offers the Ceiling Cassette Air Handler for customers who want a more hidden appearance and more centralized air distribution.

System Type	Ceiling Cassette						
Indoor Air Handler	ACiQ-09CC-HH-MC	ACiQ-12CC-HH-MC	ACiQ-18CC-HH-MC	ACiQ-24CC-HH-MC	ACiQ-36CC-HH-MC	ACiQ-48CC-HH-MC	
Power Supply	V, Ph, Hz 208/230V, 1Ph, 60Hz						
Noise Level	dB(A) 24-42.5	26-46	23.5-48	33.5-48.5	38-52	38-52	
Air Flow	CFM 147.2-353.2	147.2-417.9	147.2-447.3	547.4-765.2	659.2-1041.8	688.7-1236.1	
SEER2 / EER2	Btu/W 22.6 / 14	22.2 / 12.5	20 / 12.5	20.7 / 12	21.2 / 12	18 / 10	
HSPF2-4 / COP	Btu/W 12.1 / 4	11.6 / 3.70	12.3 / 3.18	11.6 / 3.54	10.6 / 3.43	11 / 3.09	
Dimensions (WxDxH)	in 22.44 x 22.44 x 9.65	32.68 x 32.68 x 8.07		32.68 x 32.68 x 9.65		32.68 x 32.68 x 11.30	
Net Weight / Gross Weight	lbs 35.27 / 41.89	47.18 / 59.08		59.30 / 71.43		64.59 / 76.06	
Cooling Btu	Btu 9000 (3700-13600)	12000 (3800-15100)	16000 (7000-18500)	23400 (12800-26200)	36600 (4900-38000)	48000 (4900-52700)	
Heating Btu	Btu 10000 (5100-15700)	12000 (5300-16200)	19000 (8700-20000)	25000 (11500-30700)	37000 (11400-44600)	53000 (19000-57400)	
Compatible Outdoor Unit	ACiQ-09ZPL-HP230C	ACiQ-12ZPL-HP230C	ACiQ-18ZPL-HP230C	ACiQ-24ZPL-HP230C	ACiQ-36ZPL-HP230C	ACiQ-48ZPL-HP230C	
WiFi Included	YES						



PG#012



PG#013

# Single Zone Indoor Units



## Slim Ceiling Cassette

Slim Ceiling Cassettes offer the advantages of traditional cassettes but in a slender profile designed to fit between 16" on-center joists, simplifying installations. With one-way air delivery, they efficiently draw return air along one edge and release conditioned air on the other. Despite their slim design, these cassettes provide high-efficiency heating and cooling, controlled by a handheld remote, with only the grille visible once ceiling-mounted for a discreet appearance.

System Type		Slim Ceiling Cassette			
Indoor Air Handler		SCC-0612-HH-MB*		SCC-18-HH-MB	
Power Supply	V, Ph, Hz	208/230V, 1Ph, 60Hz			
Noise Level	dB(A)	23.5 – 46.5	24 – 38	24 – 41	26 – 44
Air Flow	CFM	176.6 – 353.2		207.2 – 400.2	
SEER2 / EER2	Btu/W	22 / 15	24 / 14.6	23 / 13	20.6 / 12.5
HSPF2-4 / COP	Btu/W	12.0 / 3.75	12.1 / 3.71	10.0 / 3.56	12.2 / 3.01
Dimensions (WxDxH)	in	50.31 x 13.19 x 8.98			
Net Weight / Gross Weight	lbs	45.19 / 82.45		45.19 / 82.89	
Cooling Btu*	Btu	6500 (3600-11200)	9000 (4000-12900)	12000 (4000-13900)	16700 (5700-19000)
Heating Btu*	Btu	7400 (3700-11500)	10900 (3800-13900)	12500 (4600-15200)	20000 (8900-22000)
Compatible Outdoor Unit		ACiQ-06ZPL-HP230C	ACiQ-09ZPL-HP230C	ACiQ-12ZPL-HP230C	ACiQ-18ZPL-HP230C
WiFi Included		YES			

\*SCC0609-HH-MB can be switched between 6,9, and 12k capacities



## Floor Mount

ACiQ Floor Mounted Air Handlers are ideal for sun porches and attic rooms where space to mount a standard high wall unit is not available. Sometimes called a "heat console", these units can be mounted low on the wall or on the floor, with some being able to be mounted on the ceiling.

System Type		Floor Mount						
Indoor Air Handler		ACiQ-09FM-HH-MD*	ACiQ-12FM-HH-MD*	ACiQ-18FM-HH-MD	ACiQ-24FM-HH-MD	ACiQ-36FM-HH-MD	ACiQ-48FM-HH-MD	ACiQ-60FM-HH-MD
Power Supply	V, Ph, Hz	208/230V, 1Ph, 60Hz						
Noise Level	dB(A)	22-45	24-44	29-45	29-51.5	35-51	35-54	39-54.5
Air Flow	CFM	129.5-441.4	129.5-441.4	420.8-576.8	376.7-735.8	653.3-1224.3	665.1-1353.8	777-1365.6
SEER2 / EER2	Btu/W	27.2 / 15.1	25 / 12.5	20.4 / 12.5	20.4 / 12	20 / 12	18.5 / 9.4	18 / 9
HSPF2-4 / COP	Btu/W	10.9 / 4.43	10.5 / 3.88	10.3 / 3.07	12.1 / 3.34	10.8 / 3.29	10.1 / 2.86	10.7 / 3.02
Dimensions (WxDxH)	in	31.26 x 7.87 x 24.45		42.05 x 9.25 x 26.57		64.96 x 9.25 x 26.57		
Net Weight / Gross Weight	lbs	32.85 / 41.89	32.85 / 41.89	58.42 / 70.55	61.29 / 73.19	88.85 / 104.94	89.07 / 105.16	95.24 / 111.33
Cooling Btu	Btu	9000 (3700-13700)	12000 (3700-14000)	17000 (7400-19200)	22000 (12700-25600)	36400 (6100-38300)	48000 (6700-53500)	54000 (20000-54500)
Heating Btu	Btu	9000 (4400-16100)	12000 (4400-16100)	19000 (8300-20700)	26000 (11300-29500)	38000 (11100-45400)	52000 (18800-58700)	60000 (21700-65500)
Compatible Outdoor Unit		ACiQ-09ZPL-HP230C	ACiQ-12ZPL-HP230C	ACiQ-18ZPL-HP230C	ACiQ-24ZPL-HP230C	ACiQ-36ZPL-HP230C	ACiQ-48ZPL-HP230C	ACiQ-60ZPL-HP230C
WiFi		YES		Optional WiFi Controller				

\*Units Available for Floor or Ceiling Mount



PG#014



PG#015



## Why ACiQ?

ACiQ delivers cutting-edge comfort solutions designed to provide exceptional comfort, efficiency, and reliability, wherever you are. Our systems are engineered with advanced technology that maximizes energy savings without sacrificing performance. When customers choose ACiQ, they enjoy whisper-quiet operation, durable construction, and smart features that adapt to their lifestyle. Affordability is at the core of our mission, making superior comfort accessible to all. With an industry-leading warranty, ACiQ is not just a brand; its comfort made with you in mind.

## Contact Today

Phone: 1-877-909-ACiQ  
Email: [Contact@ACiQ.com](mailto:Contact@ACiQ.com)  
Website: [ACiQ.COM](http://ACiQ.COM)



### SINGLE ZONE MINI SPLIT SYSTEMS 12-year compressor, 7-year parts warranty with online registration

Purchase ACiQ and secure the best-in-class warranty for today's HVAC systems—featuring a 12-year compressor warranty and a 7-year part warranty. With the assurance of lasting quality, ACiQ is the smarter choice for those who want their unit to endure a lifetime.



### ACiQ ESSENTIALS 6-year compressor, 4-year parts warranty with online registration

Purchase ACiQ and secure the best-in-class warranty for today's HVAC systems—featuring a 6-year compressor warranty and a 4-year part warranty. With the assurance of lasting quality, ACiQ is the smarter choice for those who want their unit to endure a lifetime.



\* 7-year parts warranty and a 12-year compressor warranty is only available if registered online.

† 4-year parts warranty and a 6-year compressor warranty is only available if registered online.

Use the QR code to go directly to the warranty registration