


TRI-LITE ECONOMIC HVLS FANS

Economic, geared drive, high volume low speed fans
ideal for industrial & commercial settings

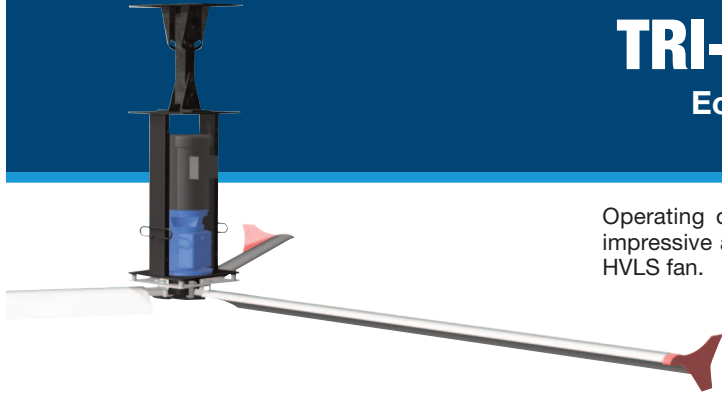

Operating on a 1.0 HP gear motor, minimal power consumption is combined with impressive air volumes to create the highly efficient Tri-Lite 3L economic geared drive HVLS fan.

Tri-Lite HVLS fans blanket a very large area by constantly moving air to create an expansive comfort zone. As a result, the big ceiling fan can create an evaporative cooling effect of three to four degrees throughout the facility.


During the heating season, the Tri-Lite HVLS fan technology can destratify uneven temperatures that can be in excess of fifteen degrees from ceiling to floor. This results in significant energy savings since the heating system cycles less frequently.

FEATURES

- Equipped with three high performance STOL design airfoils constructed of precision 6005-T5 extruded anodized aluminium alloy. Contoured for maximum air movement.
- Three wingtip fences constructed of nylon 66 redirect outward airflow into downward airflow to improve and direct airflow downwards.
- 1/4" powder-coated steel and anodized aluminum chassis resists rusting and corrosion even in cold and damp environments.
- Totally enclosed, fan cooled (TEFC) IP55 motor with precision finished gearbox for low noise and long service life. Sealed with lifetime synthetic oil. Robust 3 inch output shaft for strength with nylon bushing on input.
- Quiet Performance & Minimal Maintenance.
- Conforms to CSA Standard 22.2# 133 and UL507.



Required controller sold separately.
See HVLS controllers page

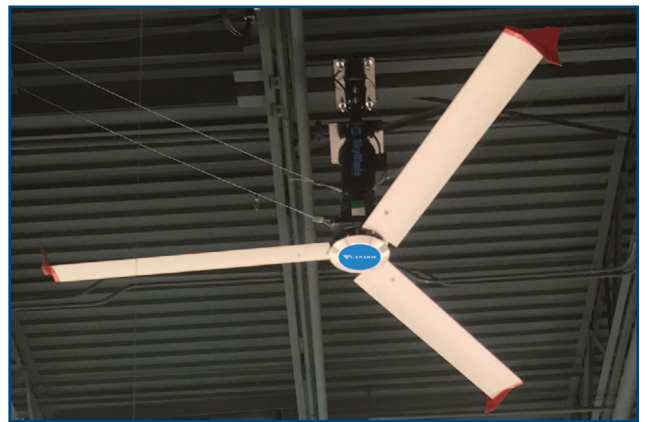

PERFORMANCE SPECIFICATIONS

MODEL	DIAMETER	NOMINAL MOTOR	VOLTS	MAX RPM	FLA	AREA OF INFLUENCE	NOISE LEVEL	WEIGHT***
3L12-V*-P**	12 Ft.	0.75 kW (1.0 HP) - 48/62hz	99-660	105	1.69-3.38	120 Ft.	45 dBA	223 lbs.
3L14-V*-P**	14 Ft.	0.75 kW (1.0 HP) - 48/62hz	99-660	86	1.69-3.38	140 Ft.	45 dBA	229 lbs.
3L16-V*-P**	16 Ft.	0.75 kW (1.0 HP) - 48/62hz	99-660	73	1.69-3.38	160 Ft.	45 dBA	235 lbs.
3L18-V*-P**	18 Ft.	0.75 kW (1.0 HP) - 48/62hz	99-660	49	1.69-3.38	180 Ft.	45 dBA	241 lbs.
3L20-V*-P**	20 Ft.	0.75 kW (1.0 HP) - 48/62hz	99-660	49	1.69-3.38	200 Ft.	45 dBA	247 lbs.
3L24-V*-P**	24 Ft.	0.75 kW (1.0 HP) - 48/62hz	99-660	42	1.69-3.38	240 Ft.	45 dBA	260 lbs.

*Replace V with input voltage 115, 230 or 460. ex: 3L24-230-3


**Replace P with 1 (single phase) or 3 (three phase)

***Based on standard 1 ft extension bar


THE S.T.O.L. ADVANTAGE

Tri-Lite airfoils are engineered with S.T.O.L. (Short Take Off & Landing) Technology to obtain the greatest amount of lift at slower speeds. The more lift the airfoil can generate, the greater amount of air which can be displaced towards the floor.

Due to an increase of lift created by the airfoil, Tri-Lite fans can operate at lower speeds with less power consumption and produce a higher distribution of airflow than other styles of airfoils.

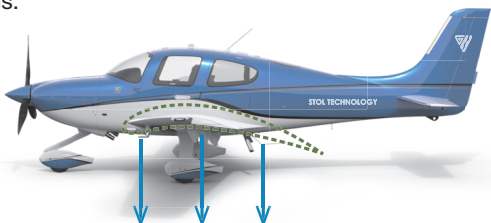

DIMENSIONS

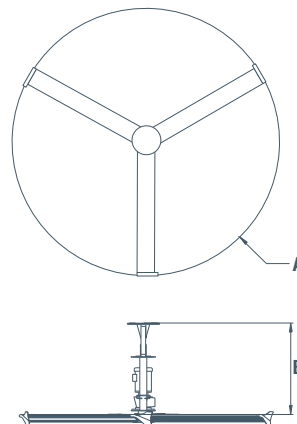

MODEL	A	B***
3L12-V*-P**	12'	44"
3L14-V*-P**	14'	44"
3L16-V*-P**	16'	46"
3L18-V*-P**	18'	49"
3L20-V*-P**	20'	51"
3L24-V*-P**	24'	55"

*Replace V with input voltage 115, 230 or 460.

ex: 3L24-230-3

**Replace P with 1 (single phase) or 3 (three phase)

***Based on standard 1 ft extension bar

HVLS CONTROLLERS



AP-1046 AUTOPILOT MULTI-FAN CONTROLLER

Wall mounted controller with 7" LCD touchscreen interface.

Web-based controller supports up to 24 fans. The included mobile controller app allows full control of all your fans from anywhere on or off your wifi network.



TF-1047 TOUCH 'N' GO CONTROLLER

Operate a single fan in forward / reverse with 0-100% speed control. Easily mounts to wall or electric gang box. Fully digital interface with password lockout capability.

Includes 50 ft. of 4-core cable for installation.



RC-1077 RADAR CONTROLLER

Digital interface controls all fan functions including programming, fault viewing, and more. Control up to 63 fans individually or as a group. Operate fans for cooling or destratification.



VLD-1069 VLD CONTROLLER

Easily mounts to wall for controlling each fan individually via an economic digital interface.



SY-1034-1 SINGLE YOKE CONTROL

Includes Fwd/Off/Rev switch and 0-10 speed pot to control fan speed. 100 Ft., 6-core shielded cable. One per fan required.



DY-1034-2 DOUBLE YOKE CONTROL

Includes Fwd/Off/Rev switch and 0-10 speed pot to control fan speed. Nema 4X. 2) 100 Ft., 6-core shielded cables. One per two fans required.



TY-1034-3 TRIPLE YOKE CONTROL

Includes Fwd/Off/Rev switch and 0-10 speed pot to control fan speed. 3) 100 Ft., 6-core shielded cables. One per three fans required.



UL-1067 ULTRALITE CONTROL

Easily mounts to wall for controlling each fan individually. Allows operation of the fan for cooling and destratification.

TRI-LITE EC SERIES CONTROLLERS



SY-1034-1 SINGLE YOKE CONTROL

Includes Fwd/Off/Rev switch and 0-10 speed pot to control fan speed. 100 Ft., 6-core shielded cable. One per fan required.



DY-1034-2 DOUBLE YOKE CONTROL

Includes Fwd/Off/Rev switch and 0-10 speed pot to control fan speed. Nema 4X. 2) 100 Ft., 6-core shielded cables. One per two fans required.



TY-1034-3 TRIPLE YOKE CONTROL

Includes Fwd/Off/Rev switch and 0-10 speed pot to control fan speed. 3) 100 Ft., 6-core shielded cables. One per three fans required.



UL-1067 ULTRALITE CONTROL

Easily mounts to wall for controlling each fan individually. Allows operation of the fan for cooling and destratification.




VLD-1069 VLD CONTROLLER

Easily mounts to wall for controlling each fan individually via an economic digital interface.

TOUCH 'N' GO PREMIER

7" Digital Touch Screen Multi-Fan Controller

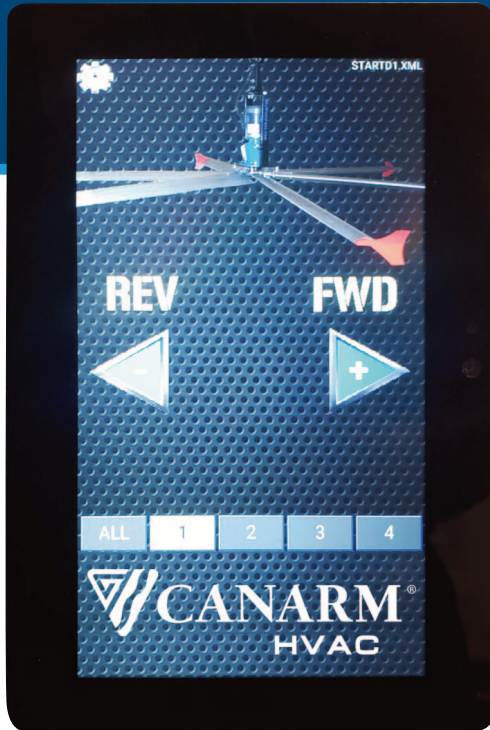


FEATURES

- Control multiple fans in groups or individually
- Operate your fans in either forward or reverse
- 0-100% speed control
- Fully digital interface
- Visual indicators of speed and direction
- Password lockout capability

PERFORMANCE SPECIFICATIONS


Power Supply	Language Protocol	Touchscreen Size	Enclosure Material	Luminance	Rating	Display Resolution	Connection	Max. Cable Length	Weight
External 12V (supplied)	0-10v signal/Canada	7"	Steel	380	IP30	272 x 480 pixels	4 Core Shielded Wire	1,640 Feet (500 meters)	0.5 lbs

DIMENSIONS

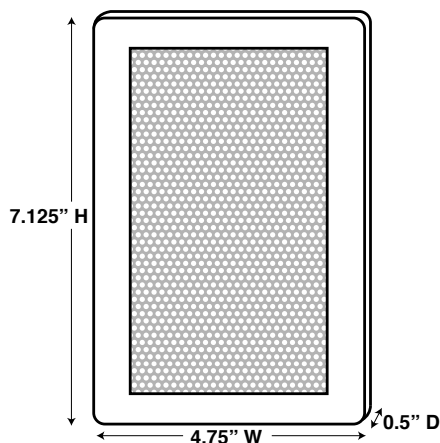

PARTS & FANS/CONTROL

- TGPC-1047-02 - Up to 2 geared and direct drive fans
- TGPC-1047-04 - Up to 4 geared and direct drive fans
- TGPC-1047-06 - Up to 6 geared and direct drive fans
- TGPC-1047-08 - Up to 8 geared and direct drive fans
- TGPC-1047-10 - Up to 10 geared and direct drive fans

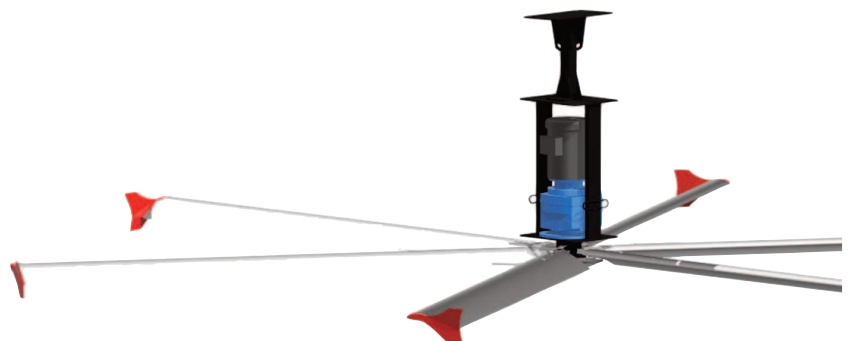

FOR USE WITH HVLS FANS