




Uptown Fire Pit Table

Installation Instructions for:

UPT-1242-IRO

UPT-1242-CGR

UPT-1242-BIR

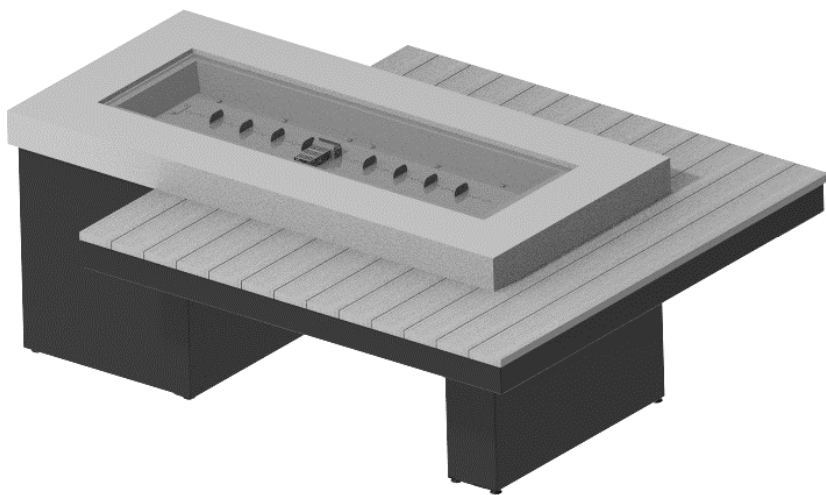

Contents

Required Tools.....	2
Placing and assembling the Table.....	3
CF-SPARKER Installation.....	6
Gas Connections.....	6
Thermocouple Installation.....	7
Electrode Installation.....	7
Locating Propane tank.....	8
Locating Natual Gas Line.....	9
Wood Care.....	9
Poly wood Care	10
Fire Media Installation.....	10
Product Registration	11
Service Parts	12

Required Tools



- **Utility Knife** - *To cut and remove packaging.*



- **Phillips Screwdriver** – *To attach support base to top.*



- **Leather Gloves** - *To protect hands from rough edges found on the coffee table.*




- **One (1) AAA Battery (not included)** - *Required for piezoelectric igniter installation.*




- Do not attempt to perform installation by yourself. This fire pit table is constructed of steel and heavy stone products. Have at least one other person help you.

Placing and Assembling the Fire Pit table


1. Remove all components from packaging.
2. Move the base sections to desired location and set into place spaced approximately 28 ½" from each other.
3. When locating your table, refer to the Crystal Fire® Plus manual and maintain clearance to combustibles.

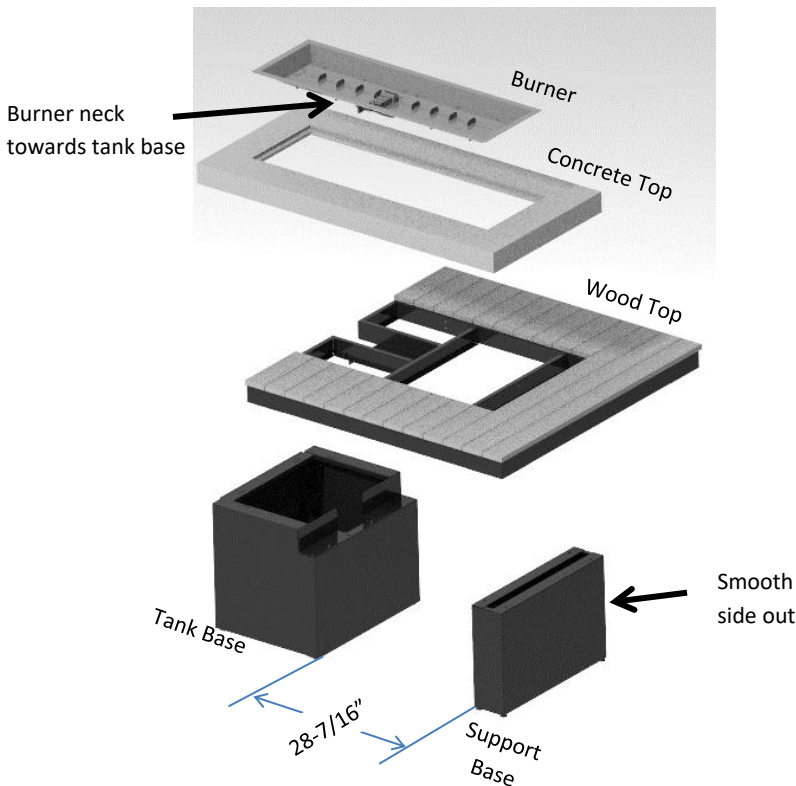

4. Place tank base in desired location, then adjust leveling legs on bottom to ensure tank door operates smoothly.
5. Use Phillips screwdriver and supplied bolts (6) to attach wood top to tank base.

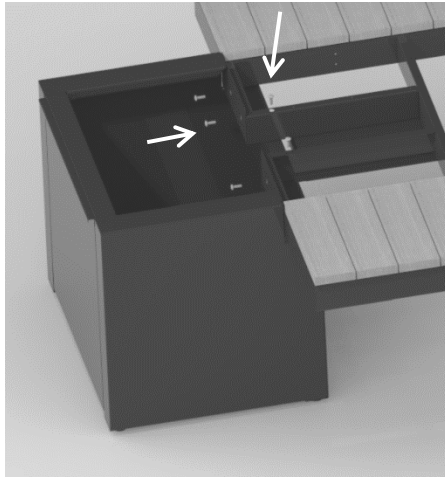


6. Using a Philips screwdriver and supplied bolts (4), attach the support base to the top as shown in the image below. Top may be needed to be lifted to help position support base.

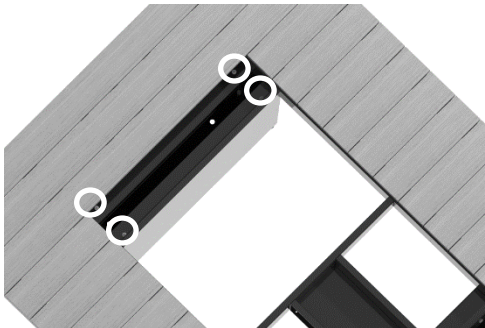

7. Align concrete top to be centered on tank base & overhanging rear to match sides.

DO NOT SLIDE SUPERCAST ON WOOD TOP

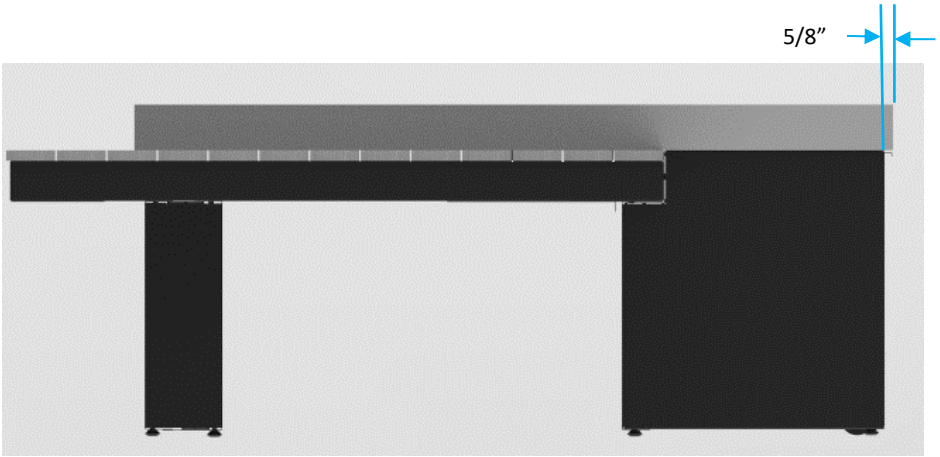



May have to adjust level legs to get Supercast top to sit flat

**If the table is relocated, remove Supercast top while moving.
Failure to do so may result in the wood frame warping.**

**Read and understand your Crystal Fire® Plus owner's manual
before installing burner or operating the device.**

CF-SPARKER Installation

- Remove CF-SPARKER cap and hex nut. Insert AAA battery (not included) with + end out.
- Install CF-SPARKER into control panel as shown below.
- Depress CF-SPARKER button to test your sparker.




Locate and orient sparker box on control panel as shown. Sparker box must be installed **before** burner valve.

Gas Connections

Read and understand your Crystal Fire Burner Owner's manual before beginning burner hookups or using the device.
Do not use Teflon tape or pipe dope on flare fittings.


See Crystal Fire Plus® instructions for burner installation.

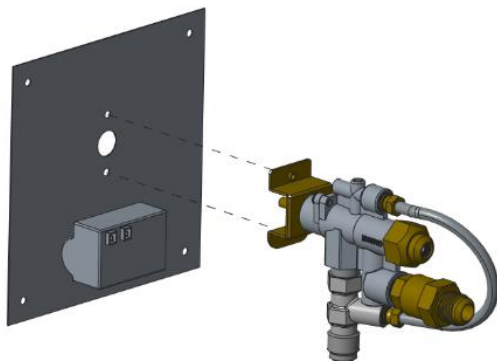

Attach burner valve to control panel with provided screws as shown below. Ensure sparker box is installed before this step.



Thermocouple Installation

- Refer to Crystal Fire® Plus instruction manual for detailed attachment of thermocouple.
- Attach thermocouple to burner valve as shown below.

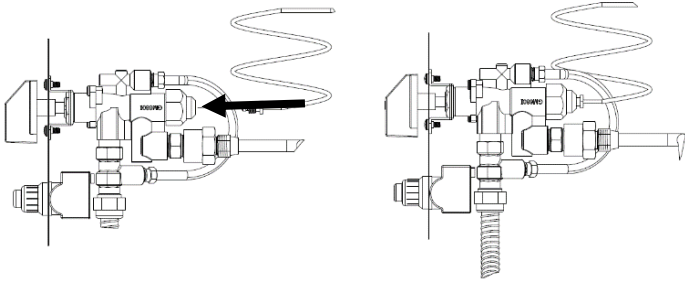

Electrode Installation


- Connect igniter and ground wire to sparker box. Both wires can connect to either connection point. The unit will operate in either configuration.
- Test system by pushing the button on the ignitor. Consult the troubleshooting section of the Crystal Fire® Plus Burner Owner's Manual, if the spark is weak, intermittent, or not present.

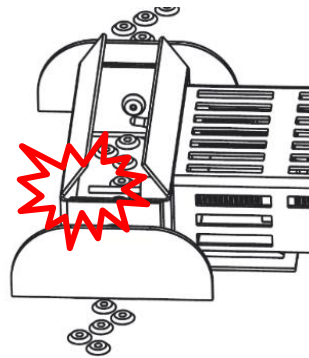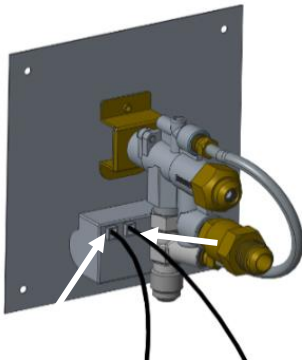


Locating your Tank

(If applicable)


- Tilt your propane tank into the slide out tank drawer.

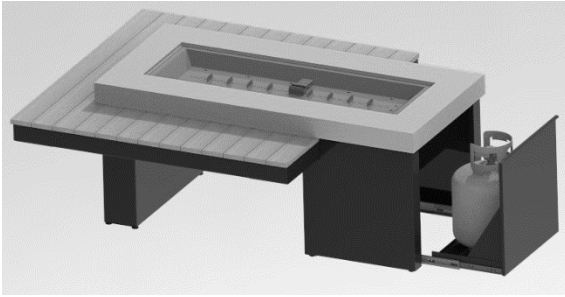

- With the propane tank and control valve in the OFF position, connect the Regulator Hose, included with the Crystal Fire® Plus burner, to your propane tank. Hand tighten connection, do not use tools to tighten this connection.

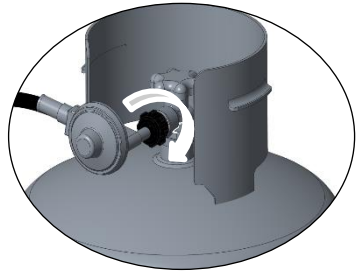

- Slide tank drawer in. Ensure that the Gas hose does not get pinched in the process of sliding the tank drawer.

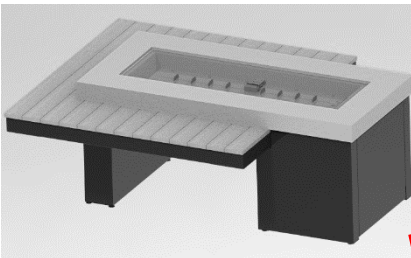


NOTE: Over time the bearings in the door glides may require re-greasing. Any spray lubricant, such as WD-40, may be used to lubricate drawer glides. Perform annually or on an as needed basis to maintain smooth operation.

Locating Natural Gas Line

(If applicable)

17-3/4 x 4

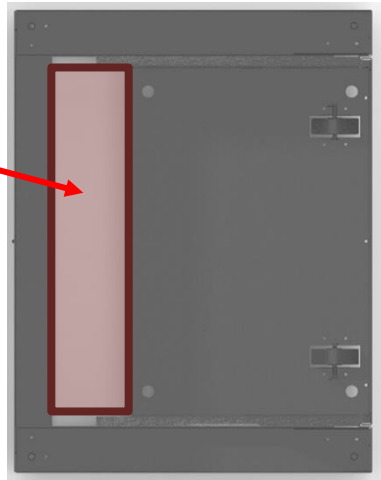

Top View of Base with Door

- Locate natural gas stub inside of the red outline to avoid clearance issues with the door for natural gas installations.

Iroko Wood Care

Annual maintenance: To maintain the natural wood top, it is recommended to clean with an exterior wood cleaner and apply oil (Cabot Australian Timber Oil, Natural color). Natural wood will darken over time, with proper maintenance. If not maintained, the wood may stain, or discoloration may appear. If you choose not to maintain your wood, it will gradually change color over time depending on exposure to the outdoor elements. During this aging process slight surface cracking may be expected as the wood is drying out. However, this is a purely natural outcome and should not be considered a structural defect.



Regular cleaning: As with all wood furniture, regular cleaning is essential to keep the wood free from pollen and dirt. When cleaning, do not pressure wash the wood, wipe with a damp cloth minding the direction of the wood grain. Cover or store indoors when not in use.

Repairing dents and scratches: Lightly sand the area with 200 grit sandpaper. Apply a small amount of water to the dent/scratch, cover with a cotton towel and apply more water to the towel so it is wet. Using an iron on medium high heat, place the iron on the towel above the dent/scratch for 15 to 30 seconds. Repeat as needed to raise the dent/scratch. Once the wood has dried, lightly sand with 200 grit sandpaper and apply oil as outlined in Annual maintenance. Not all dents/scratches will come out, but this will minimize their appearance.

Poly wood Care

General cleaning: To remove surface dust, just wash furniture with cold, clear water. Scrub boards with soap and water solution using a soft sponge or plastic-bristled brush.

Cosmetic repairs: Fill any small gouges or scratches with colored silicone sealants and smooth the area for an even finish.

Fire Media Installation

- Scatter all included glass beads, lava rock, or other approved fire media evenly across entire burner surface keeping it out of the guard on the burner. Consult the Crystal Fire® Plus manual for detailed instructions.

**DO NOT BURN WITHOUT GLASS OR OTHER APPROVED
DECORATIVE FIRE MEDIA**

DO NOT BURN WITH GLASS COVER INSTALLED

IMPORTANT

Please consult your Crystal Fire® Plus instruction manual for detailed instructions and important information related to connecting your linear burner, including safety information, proper tightening of connections and full burner installation and lighting instructions.

DO NOT ATTEMPT TO INSTALL CFP1242 BURNER WITHOUT FIRST CONSULTING THE MANUAL. IF YOU ARE UNSURE OF HOW TO COMPLETE THE STEPS OUTLINED, CONSULT A QUALIFIED TECHNICIAN

WARNING

After consulting the manual and following instructions, remember; before operating, all gas connections must be fully checked for leaks.



WARNING: This product can expose you to chemicals including Carbon Monoxide and Benzene which are known to the State of California to cause cancer or birth defects or reproductive harm. For more information, visit www.P65Warnings.ca.gov

Warranty: Fire pit tables are covered under a 1-year manufacturer's warranty. Please visit <https://www.outdoorrooms.com/product-registration> to register your product.

Thank you for purchasing an Outdoor GreatRoom Company product! This fire pit was made with pride in the USA.



Service Parts

- **Refer to Crystal Fire® Plus instruction manual for burner service parts**

Part	Part number
Supercast – Iroko & Birchwood	2554-1242-LIN
Supercast – Coastal Grey	2554-1242-NAT
Top Assembly - Iroko	UPTOWN-IRO-TOP
Top Assembly – Coastal Grey	UPTOWN-CGR-TOP
Top Assembly – Birchwood	UPTOWN-BIR-TOP
Tank Base Assembly (Includes door assembly)	UPT-BS-TNK-IRO
Small Pedestal Assembly	UPTOWN-BASE-IRO
Glass Burner Cover	1242GGC



9583 217th St. W. • Lakeville, MN 55044
Toll Free: 1-866-303-4028 • Sales@OutdoorRooms.com