



## DESCRIPTION

The DVUT 300 HB EC floor-mounted air handling units are intended for single-room ventilation of schools, offices and other public and commercial spaces.

These air handling units do not require a duct system and provide a simple yet efficient ventilation solution for newly built and renovated spaces.

Efficient supply and exhaust single-room ventilation with air flow up to 188 CFM.

## DESIGN

### ✓ Air dampers

Supply and exhaust dampers are closed automatically while the unit is off to prevent drafts.

### ✓ Air filtration

Supply air purification is provided by a MERV8 and a MERV14 panel filters (PM2.5 > 75 %). To meet more stringent air quality requirements, the unit can be upgraded with a MERV14 carbon filter and a HEPA filter (PM2.5 > 95 %) (purchased separately).

Exhaust air is purified by a MERV8 panel filter.

## MOTOR

The units feature high-performance electronically commutated (EC) external rotor motors with forward curved blades. These state-of-the-art units offer excellent energy efficiency. In addition to that, EC motors combine high performance and optimum control over the entire speed range. EC motors have an excellent power efficiency (up to 90 %).

## KEY FEATURES

- ✓ Efficient supply and exhaust ventilation of individual spaces.
- ✓ Modification with an enthalpy heat exchanger available.
- ✓ Low-energy EC fans.
- ✓ Low noise operation (1.6 Sones).
- ✓ Supply air purification by means of two built-in MERV8 and MERV14 filters with the option of carbon or HEPA filters.
- ✓ Simple installation.
- ✓ Contemporary design.

## BYPASS


The units are equipped with a summer bypass function.

## HEAT EXCHANGER

The DVUT units feature a counter-flow heat exchanger made of polystyrene.

The heat from the extract air is transferred to the supply air via the heat exchanger which greatly helps reduce ventilation heat losses. This can lead to formation of condensate that is collected in a special drain pan and discharged into the sewage system.

In warm weather, the unit can either be used in its summer bypass mode (fresh intake air is directly supplied to the room, bypassing the heat exchanger and not coming in contact with warm extract air) or, if air conditioning is being used, the extract air will cool the heat exchanger and bring fresh air at the same temperature as the air-conditioned air that is being extracted.

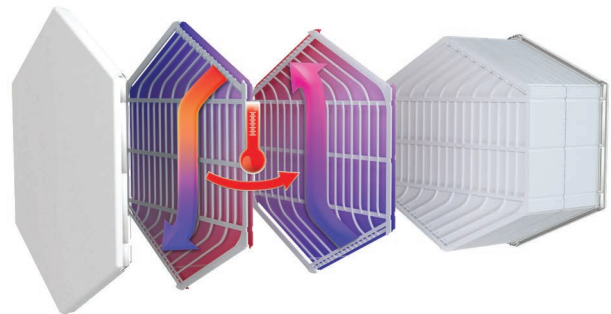

### CONTROL UNIT AND OPERATION

✓ **Freeze protection**


In units without an electric preheater the supply fan is shut down automatically, using the feedback from the exhaust air temperature sensor, to let the warm extract air thaw the heat exchanger. Then the supply fan turns on and the unit reverts to normal operation.

✓ **Control**

The units may have a built-in or remote control panel. There are three types of control panels available: A14, A17, A18.

### DIMENSIONS

Model	W	W1	W2	L	L1	H	H1	H2	D
DVUT 300 HB EC	24 <sup>7</sup> / <sub>16</sub>	9 <sup>1</sup> / <sub>16</sub>	7 <sup>11</sup> / <sub>16</sub>	18 <sup>1</sup> / <sub>2</sub>	20 <sup>1</sup> / <sub>2</sub>	69 <sup>11</sup> / <sub>16</sub>	58 <sup>1</sup> / <sub>8</sub>	11 <sup>9</sup> / <sub>16</sub>	7 <sup>7</sup> / <sub>8</sub>

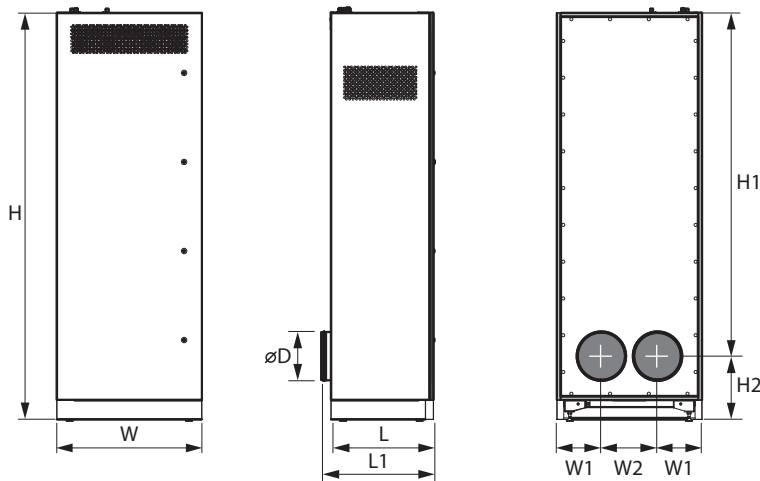



# DVUT 300 HB EC

PRODUCT  
SPECIFICATIONS

TECHNICAL  
DATA

## SINGLE-ROOM VENTILATION

### PERFORMANCE




Model	DVUT 300 HB EC
Voltage [V / 50 (60) Hz]	1~120
Maximum power consumption without an electric heater [W]	123
Maximum current consumption [A]	1.8
Maximum air flow [CFM (l/s)]	188 (89)
RPM [min <sup>-1</sup> ]	2150
Sound pressure level at 10 ft [Sones]	1.6
Transported air temperature [°F]	-13...+122
Casing material	painted steel
Insulation	1 9/16" mineral wool
Filter:	extract MERV8
	supply MERV8 and MERV14 (Option: MERV14 Carbon; HEPA Filter)
Connected air duct diameter [in]	7 7/8
Weight [lb]	304±3 %
Heat recovery efficiency [%]	from 82 to 97
Heat exchanger type	counter-flow
Heat exchanger material	polystyrene
SEC class	A

Tel: 888-640-0925  
513-348-3853  
Fax: 513-268-4597

Sales@ventsus.com  
VentsUS.com  
11013 Kenwood Road,  
Cincinnati, Ohio 45242



## DVUT 300 HB/HBE

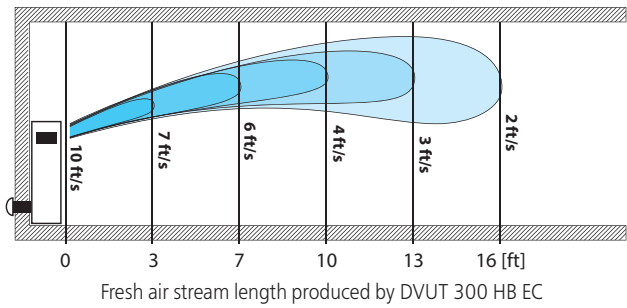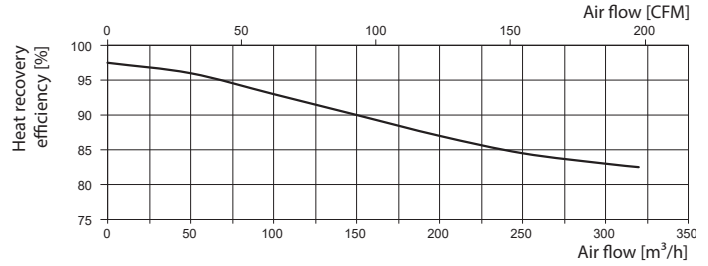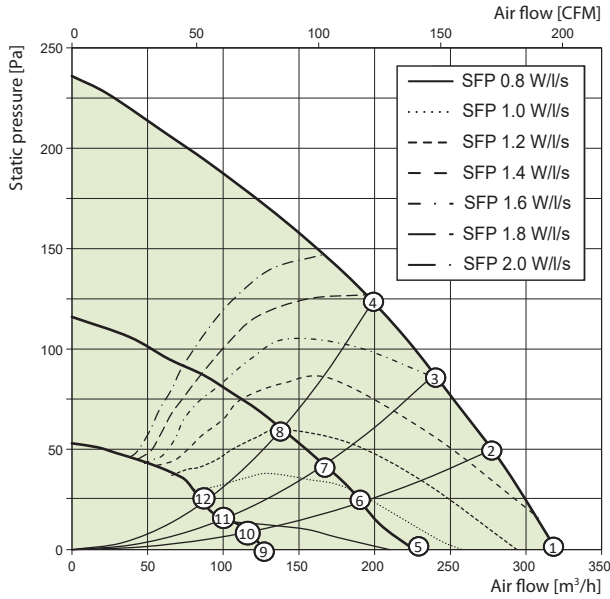

MODEL	QUANTITY	COMMENTS	PROJECT
			location:
			architect:
			engineer:
			contractor:
			submitted by:

Tel: 888-640-0925      Sales@ventsus.com  
 513-348-3853          VentsUS.com  
 Fax: 513-268-4597    11013 Kenwood Road,  
 Cincinnati, Ohio 45242