

Ion® X-ONEi+

Submersible All In One Pump With Built-In High Water Alarm




Pump Features

- Applications
 - Basement Sump
 - Septic Tank Effluent
 - Sewage Ejector
- Carbon ceramic mechanical seal
- Oil-filled motor with automatic reset thermal overload protection
- Upper and lower single-row ball-bearing construction
- Ion+® digital level control piggyback switch with alarm has no moving parts (standard)
- 3 year residential warranty

System Specifications

Typical Applications	• Basement sump • Sewage Ejector • Septic tank effluent
Maximum Capacity	Up to 80 GPM
Maximum Head	Up to 20'
Electrical Data	115 V, 1 Ø, 8.2 FLA, 60 Hz
Motor Data	½ HP, 3450 RPM
Intermittent Liquid Temperature	120° F
Recommended Minimum Basin Size	18" x 24"
Automatic Operation	i+: Ion+ (standard)
Materials of Construction	Cast iron & engineered thermoplastic
Power Cord	10' Standard
Discharge	2" with 1½" reducer
Solids	1½" to 2"

Pump Performance

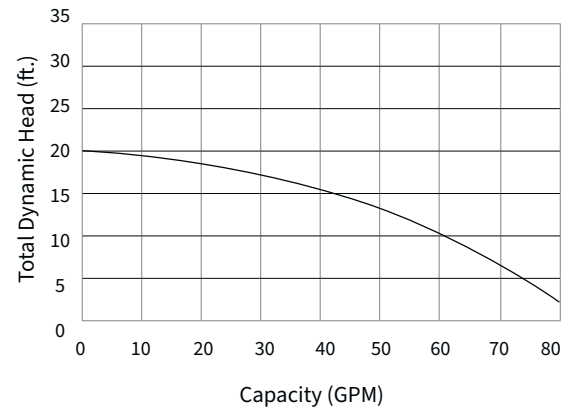

Pump Dimensions

