


XB - BELT DRIVE WALL FANS

Designed for commercial and medium duty industrial applications
Factories, Warehouses, Gymnasiums, Underground parking garages, etc.

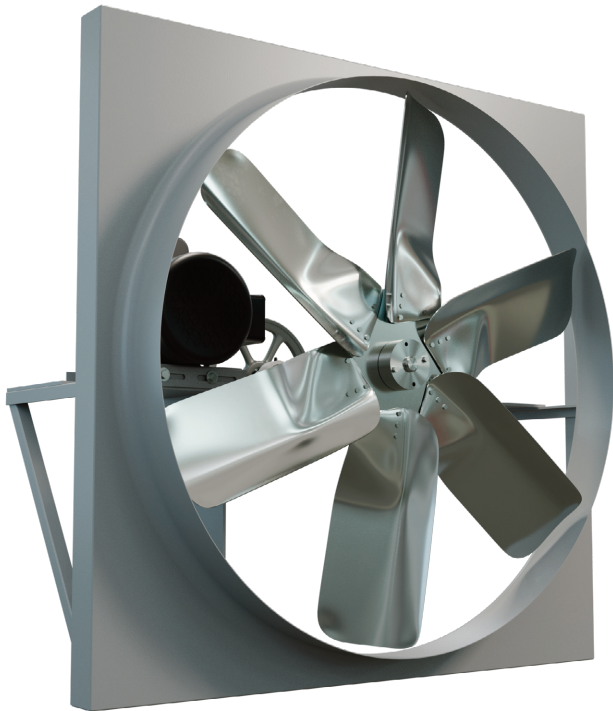

BACK VIEW

These fans are typically used for low pressure applications with little or no duct work.

The XB series is designed and constructed for efficient and economical operation at low speeds and low noise levels.

These fans are used for exhaust applications.
For supply applications, please see SXB supply fans.

FEATURES

- Heavy gauge steel fan panel with deep spun and flared venturi for maximum efficiency.
- Heavy gauge welded steel motor and bearing supports.
- Heavy duty cast iron pillow block bearings.
- TEFC motors are standard.



Non-stock, made-to-order products are non-returnable and cannot be cancelled.

DIMENSIONS

MODEL	BLADE DIAMETER	A X A SQUARE	B	C (BELT DRIVE MOTOR FRAME)	
				56 - 184	213 - 286
XB24	24"	29.625"	4.0"	18"	--
XB30	30"	35.625"	4.5"	18"	--
XB36	36"	41.625"	5.0"	18"	28"
XB42	42"	47.625"	5.0"	18"	28"
XB48	48"	53.625"	5.0"	18"	28"
XB54	54"	59.657"	5.5"	18"	28"
XB60	60"	67.657"	6.0"	18"	28"

OPTIONS



For fan complete with cabinet/guard and shutter, substitute "T" with CBS



For fan complete with front sleeve and shutter, substitute "T" with SLS



For fan with rear sleeve and back guard, substitute "T" with SLB

For a complete listing of all available options, see the options & accessories page.

