

Atmosphere Vortex® D-65 Destratification Fans



Models:

D-65 – Black

D-65 – White



Fine-Tune Your Thermal Comfort

Use these fans in your retail locations, commercial and manufacturing facilities to create uniform air temperatures from floor to ceiling for maximum thermal comfort – saving up to 35% in the heating season and up to 25% in the cooling season.

KEY FEATURES

Smart Design – The 3D-shaped fan blade design converts rotational energy loss into a air flow for straight air movement. Angle the fan along any vector for an easy-to-direct column of air. Speed is controllable.

Quiet Operation – Mixed flow impeller provides an ultra-quiet operation.

Applications – Ideal facilities will have ceiling heights from 15' to 75', e.g., grocery stores, warehouses, airports/hangers, arenas, gyms, theatres, hospitals, manufacturing facilities etc.


10-Year Warranty

Other Details

- Includes three types of UL-approved, fast-mounting hardware.
- ETL certified for US and Canada. Conforms to UL-507, CAN/CSA C22.2# 113.
- Operating temperature: -13°F (-25°C) to 140°F (60°C).
- Single-phase, permanent, split capacitor motor (variable speed with optional speed control).
- Motor is class F thermally protected.
- No lubrication required. Bearings are sealed.



Specifications						
Weight	Max RPM	Volts	Watts	Amps	Max CFM	dB(A)
15.62 lbs (7.1 kg)	2800	120	232	2.1	1082	54

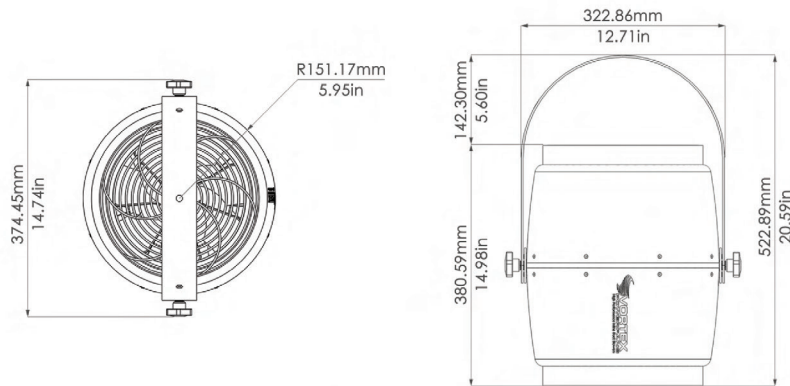

3-D Shaped Vanes



Easy-to-direct airflow



Quiet due to Mixed flow Impeller

