

SUBMITTAL DATA

VIR12HP230V1R32AH / VIR12HP230V1R32AO
12000 BTU/H Wall Mounted Heat Pump System

Job Name	Location		Date
Purchaser	Engineer		
Submitted to	For		
Unit Designation	Schedule No.		

			
YBE1FBF	VIR12HP230V1R32AH	VIR12HP230V1R32AO	XE71 (Optional)

GENERAL FEATURES

- AHRI Certificate: [214813257](#)
- High Efficiency DC Inverter Technology
- Compact and Quiet Design
- Auto-Clean Function on Indoor Unit
- Wireless Remote with LCD Display
- Wired Controller Options
- New R32 Refrigerant
- Composite Drain Pan
- Wi-Fi Included (Factory Installed)
- Low Ambient Cooling down to -20°F (Range -20°F to 122°F)
- Low Ambient Heating down to -22°F (Range -22°F to 86°F)
- Coil (Indoor and Outdoor) Copper Tube / Aluminum Fin
- Blue Colored Fin - 500 Hrs Salt Spray Tested

SPECIFICATIONS, FEATURES & FUNCTION SUMMARY


SYSTEM TYPE			HEAT PUMP	FEATURES & FUNCTIONS SUMMARY	
Outdoor Model			VIRI2HP230V1R32AO	Inverter Type	G20
Indoor Model			VIRI2HP230V1R32AH	Ultra Low Frequency Torque Control	Yes
SYSTEM PERFORMANCE				Power Factor Correction	Yes
Cooling Capacity	Min - Max	Btu/h	8,528 - 17,056	Basepan With Electric Heater	Yes
	Capacity @95°F	Btu/h	12,000	Indoor & Outdoor Fin Coating (Blue Fin)	Yes
Heating Capacity	Min - Max	Btu/h	7,691 - 15,695	Intelligent Defrosting	Yes
	Capacity @47°F	Btu/h	12,000	Intelligent Preheating	Yes
	Capacity @17°F	Btu/h	10,000	Low Voltage Startup	Yes
	Capacity @5°F	Btu/h	11,000	Memory/Power Failure Recovery	Yes
SEER2			24.5	Self Diagnosis	Yes
EER2			13.0	Wired Controller Interface	Yes
HSPF2			9.5	WiFi Included	Yes
COP @5°F			1.95	NEW! Easy Service Access	Yes
Cooling Temperature Range		*F	-20 - 122	Indoor Fan Type	Crossflow
Heating Temperature Range		*F	-22 - 86	Multi Fan Speeds	7 Speeds
Refrigerant Type			R32	Indoor Unit Display	Yes
INDOOR UNIT			VIRI2HP230V1R32AH	Auxiliary Electrical Heater	No
Air flow (Min - Max)		CFM	230 - 400	Ventilation (Outdoor Air)	No
Sound Pressure Level (Min - Max)		dB(A)	20 - 43	REMOTE CONTROLLER FUNCTIONS	
Dehumidification		pt/hr	2.96	NEW! Auto Clean	Yes
External Dimensions (W x H x D)		in	32-31/64 x 11-17/32 x 7-23/32	Auto Mode	Yes
Package Dimension (W x H x D)		in	34-29/64 x 14-3/8 x 10-35/64	Auto Fan	Yes
Net Weight		lbs	20.9	Auto Swing (Horizontal Auto Swing)	Yes
Gross Weight		lbs	25.4	Auto Swing - 180° (Vertical Auto Swing)	Yes
OUTDOOR UNIT			VIRI2HP230V1R32AO	Clock	Yes
Compressor Type		GREE G20 / SINGLE CYLINDER / 1 - STAGE INVERTER		Dry Mode	Yes
Sound Pressure Level		dB(A)	52	Dry Anti-Mildew (X-Fan) Mode	Yes
External Dimensions (W x H x D)		in	31-37/64 x 21-27/32 x 13-25/32	Energy Saving Mode	Yes
Package Dimension (W x H x D)		in	34-21/64 x 24-13/32 x 15-43/64	Dirty Filter Alert	Yes
Net Weight		lbs	67.3	Fan Speed Control	Yes
Gross Weight		lbs	72.8	I Feel Function	Yes
REFRIGERANT PIPING				Privacy Lock	Yes
Refrigerant Charge - R32		oz	28.2	Quiet Mode	Yes
Additional Charge		oz/ft	0.2	Room Temperature Display	Yes
Line Set Size (Liquid - Gas) - Flared Connections		in	1/4 - 1/2	Sleep Mode	Yes
Pre-Charge Length		ft	25	3 Sleep Mode Options	Yes
Pipe Length (Min - Max)		ft	10 - 66	Timer Mode	Yes
Max. Pipe Elevation		ft	40	Turbo Mode	Yes
ELECTRICAL				Display On/Off Control	Yes
Power Supply		208-230V / 1Ph / 60Hz (Powered by the Outdoor Unit)		Freeze Guard Mode	Yes
Voltage Range (Min - Max)		VAC	187 - 253	Power Failure Mode	Yes
Rated Current - Cooling		A	6.64	Humidity Control	Yes
Rated Current - Heating		A	6.41		
MCA		A	10		
MOCP		A	15		
Suggested Breaker Size		A	10		
Main Power Wire Size		AWG	Per Local Code		
Interconnecting Wire Size		AWG	14 / 4		

DIMENSIONS

INDOOR UNIT

Unit: inch


VIR12HP230V1R32AH	
DIMENSIONS	
W	32 31/64
H	11 17/32
D	7 23/32
W1	4 29/64
W2	21 11/32
W3	6 11/16

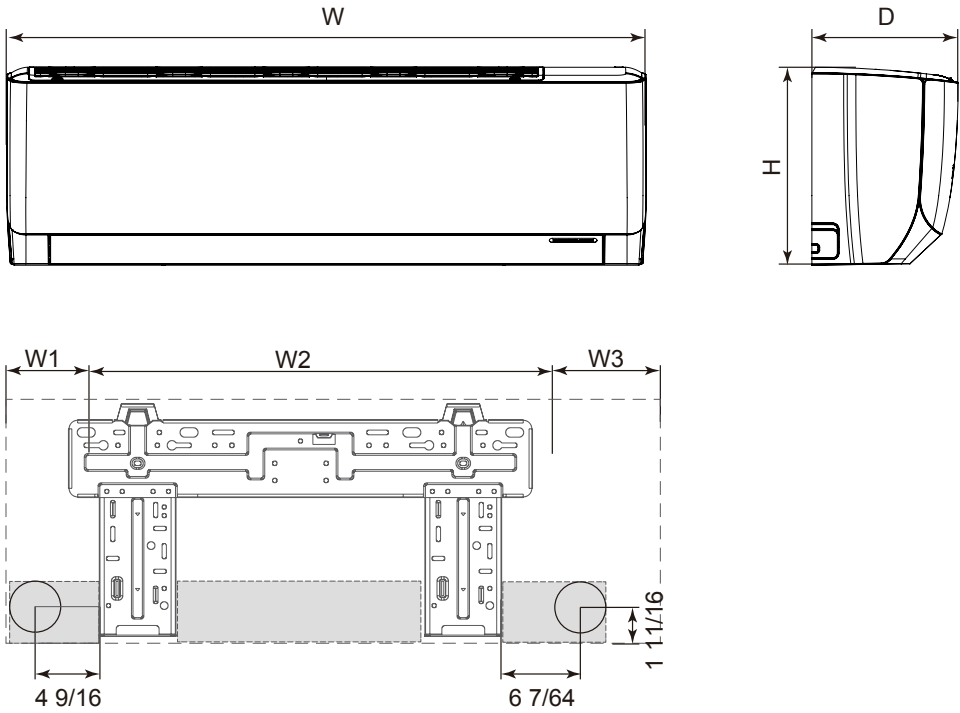

OUTDOOR UNIT

Unit: inch


VIR12HP230V1R32AO

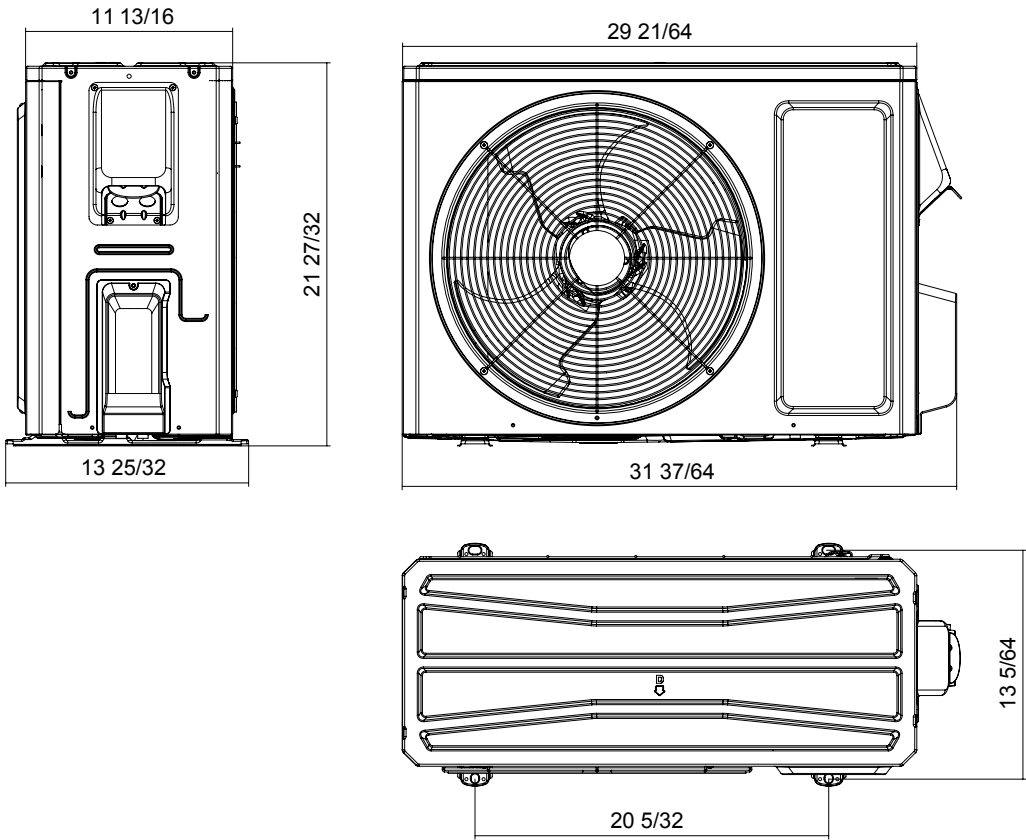

CLEARANCES



INDOOR UNIT

Minimum clearance

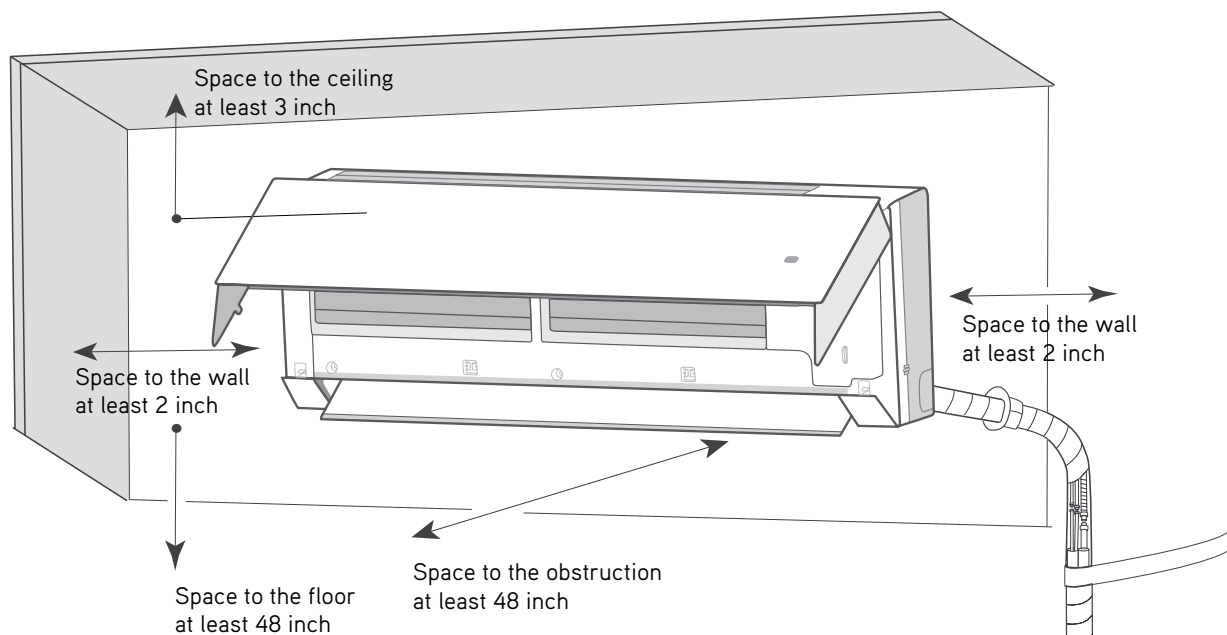

OUTDOOR UNIT

Minimum clearance

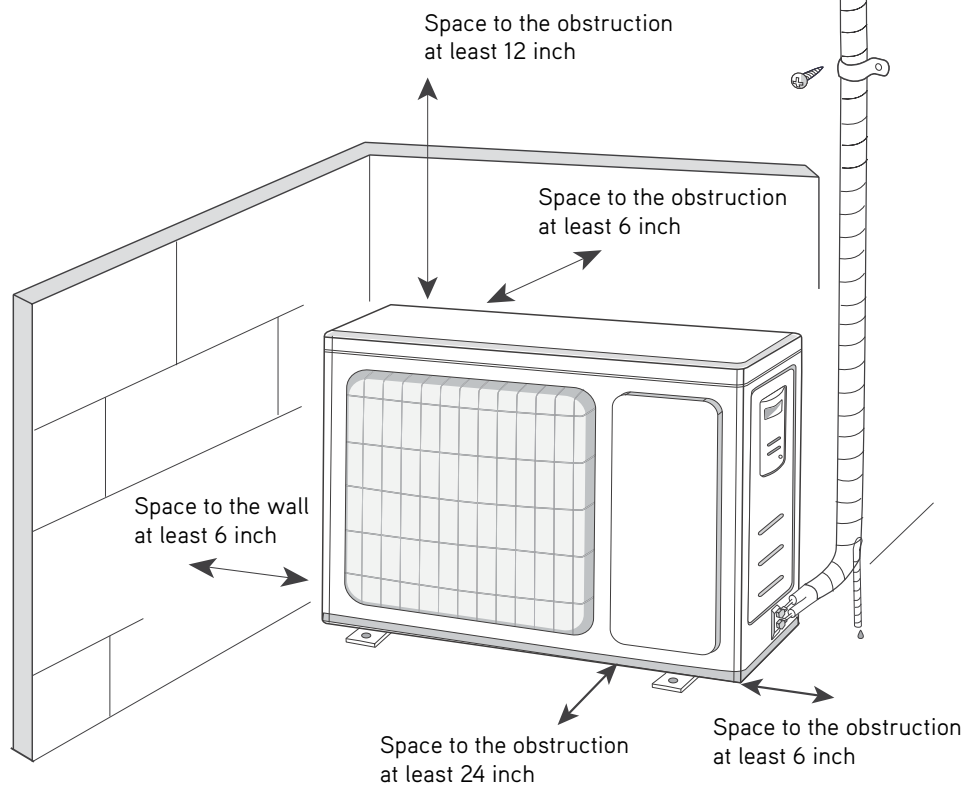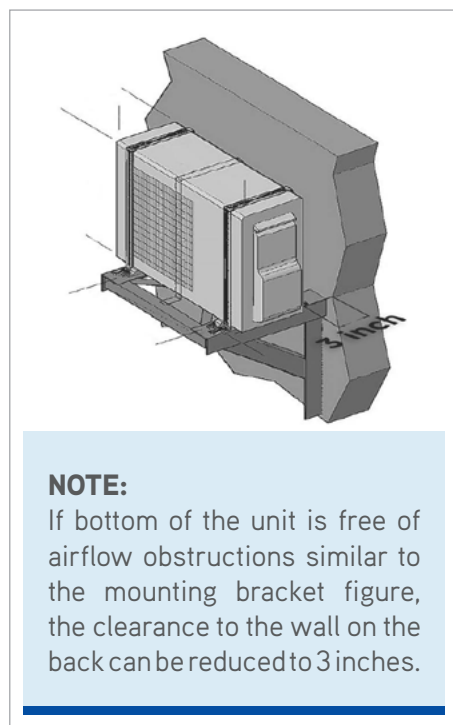

Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs without notice or without incurring obligations. All Rights reserved.

GREECOMFORT.COM/SYSTEM-DOCUMENTATION