


ACiQ[®]

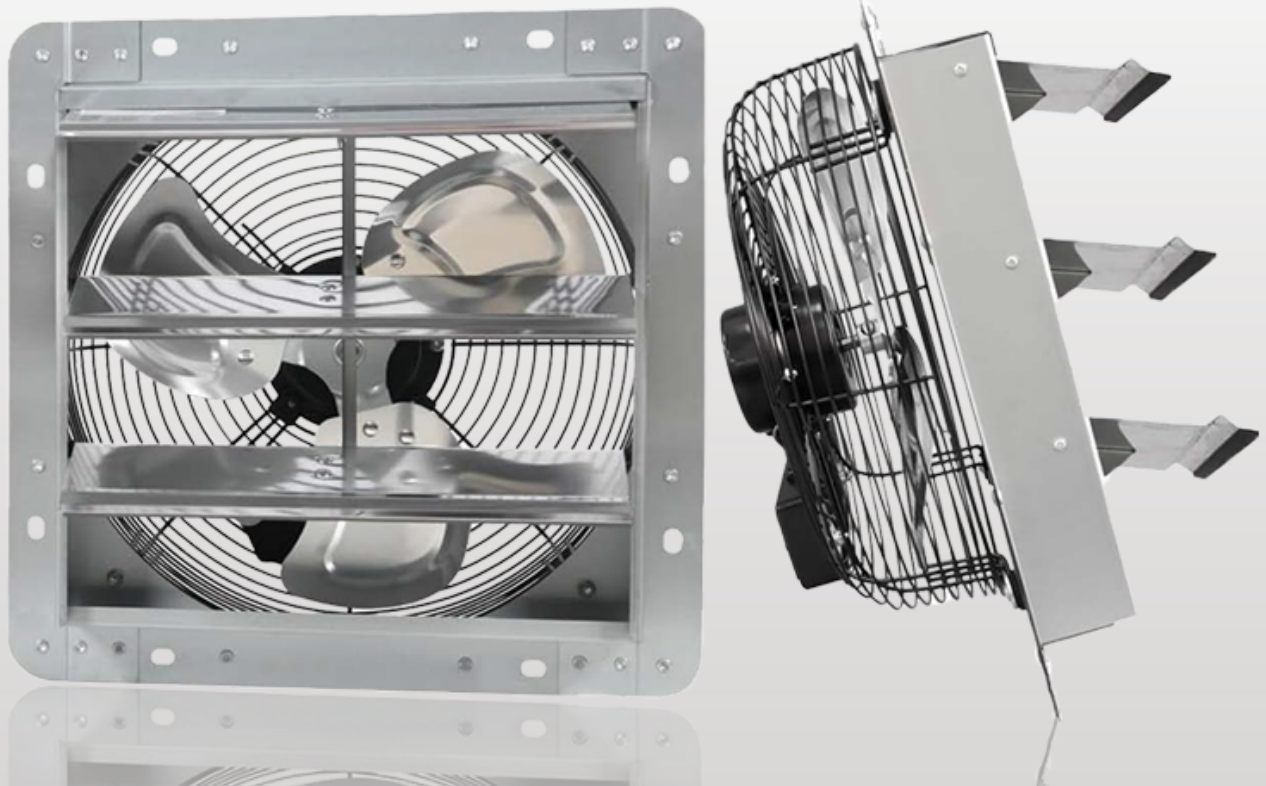

SMWE Shutter Ventilation Fan

Main features of SWE Louvered Ventilators

- **Multi-Purpose:** Louvered exhaust fans are great for removing heat, moisture, dust, and bad odors from any residential, commercial, industrial, or agricultural space. Perfect for use in home attics, workshops, welding rooms, factories, warehouses, barns, and greenhouses.
- **Corrosion Resistant:** Exhaust fans are made with high-grade aluminum louvers and blades that withstand moisture and heat, providing longevity to the fan and preventing corrosive rust from forming.
- Can be used with speed regulator.

Typical Features includes:



Get rid of floating dust




Remove unpleasant odors



Exhaust moisture




Remove hot, stale air

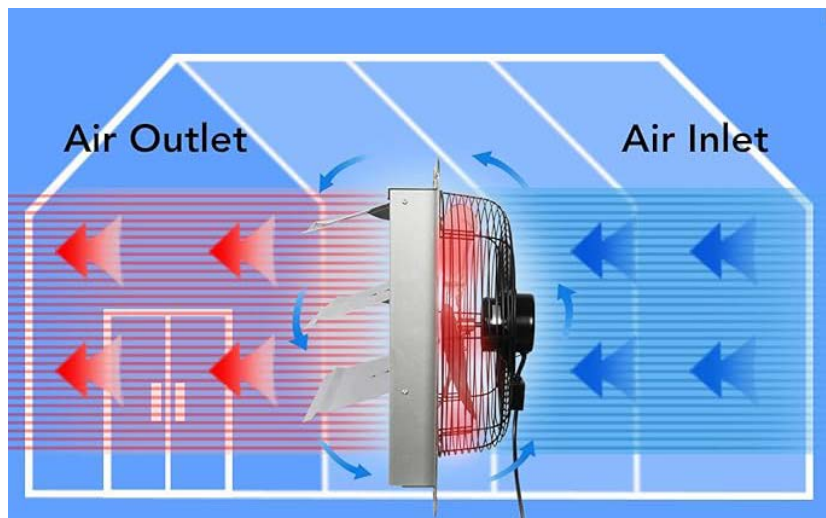

Dimension and Performance

Model	Voltage/Frequency	Speed (RPM)	Operating current (A)	Operating power (W)	Flow (CFM)
SWE10	120V/60HZ	1606	0.4	43	820
SWE12	120V/60HZ	1688	0.4	49	1700
SWE14	120V/60HZ	1665	0.6	74	2250
SWE16	120V/60HZ	1583	0.9	107	3100
SWE18	120V/60HZ	1618	1.2	140	4200
SWE20	120V/60HZ	1145	1.3	152	4000
SWE24	120V/60HZ	1140	1.5	181	5280
SWE30	120V/60HZ	870	1.8	201	7207
SWE36	120V/60HZ	830	2.2	240	9432

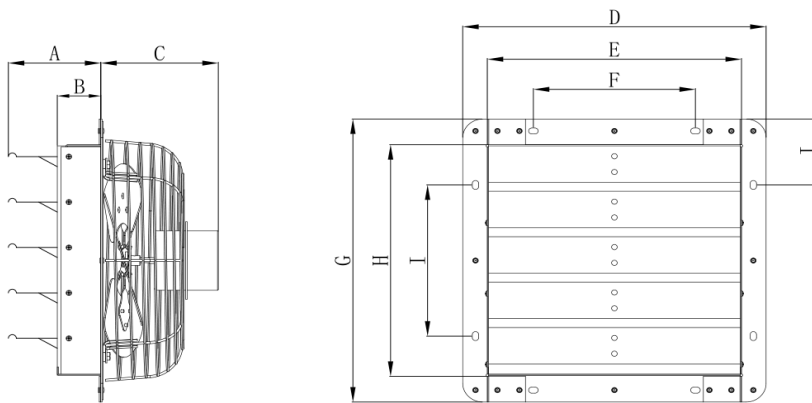

Model	A	B	C	D	E	F	G	H	I	J
SMWE10	4.5in(115mm)	1.9in(49mm)	5.0in(128mm)	12.8in(325mm)	10.6in(270mm)	6.8in(173mm)	12.8in(325mm)	10.3in(263mm)	6.8in(173mm)	2.9in(76mm)
SMWE12	5.5in(140mm)	2.1in(54mm)	5.2in(133mm)	14.9in(380mm)	12.4in(315mm)	7.9in(202mm)	14.9in(380mm)	12.0in(305mm)	7.9in(202mm)	3.5in(89mm)
SMWE14	5.5in(140mm)	2.1in(55mm)	5.7in(145mm)	17.1in(435mm)	13.9in(354mm)	9.1in(231mm)	17.1in(435mm)	13.8in(350mm)	9.1in(231mm)	4.0in(102mm)
SMWE16	5.6in(142mm)	2.4in(62mm)	5.7in(146mm)	18.8in(480mm)	16.1in(411mm)	11.8in(300mm)	18.8in(480mm)	15.9in(405mm)	11.8in(300mm)	3.5in(90mm)
SMWE18	6.2in(160mm)	2.5in(65mm)	6.1in(155mm)	20.9in(532mm)	18.3in(465mm)	13.9in(355mm)	20.9in(532mm)	17.9in(456mm)	13.9in(355mm)	3.4in(88mm)
SMWE20	5.8in(148mm)	2.7in(68mm)	9.1in(231mm)	22.9in(584mm)	20.1in(511mm)	15.9in(406mm)	22.9in(584mm)	20.1in(511mm)	15.9in(406mm)	3.4in(88mm)
SMWE24	5.8in(148mm)	2.7in(68mm)	9.1in(231mm)	26.9in(685mm)	24.2in(616mm)	20.0in(508mm)	26.9in(685mm)	24.3in(616mm)	20.0in(508mm)	3.4in(88mm)
SMWE30	6.7in(170mm)	3.1in(78mm)	11.4in(290mm)	32.9in(838mm)	30.1in(767mm)	25.9in(660mm)	32.9in(838mm)	30.1in(767mm)	25.9in(660mm)	3.4in(88mm)
SMWE36	6.7in(170mm)	3.1in(78mm)	11.4in(290mm)	38.9in(990mm)	36.3in(921mm)	32.0in(813mm)	38.9in(990mm)	36.1in(918mm)	32.0in(813mm)	3.4in(88mm)

*Specifications are subject to change without prior notice