



Indoor Comfort Products Brought to You  
by the Manufactured Home Experts!

## North-AC AccuCharge® MC-Coil Split Systems (SEER2)




Micro-Channel Condenser

**13.4 SEER2 split systems can only be installed  
in the Northern DOE Region after 12/31/2022.**



Micro-Channel Coil

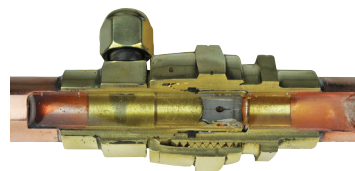

Cutaway of FitRight® Fitting



Coil Accessory Kit



Line Set with FitRight Fittings

**Robust Post and Jacket Design** has independent louvered panels that are easily removed for service and maintenance, while protecting the coil from yard debris and extreme weather.

**Micro-Channel Coils** minimize refrigerant charge and cost; while mounted on a rugged, composite drain pan with damage-preventing molded steps and drainage holes, in two competitive footprints.

**AccuCharge Systems** consist of pre-charged equipment and line sets with unique, quick-connect fittings; to significantly reduce the time, personnel, and skill-set needed to install.

**2023-M1 DOE Compliance** for new performance minimums and unique MH testing standards, exclusively designed and labelled for use in manufactured home applications.

**Dependable Warranty** handled directly by Style Crest's dedicated HVAC Team, offering the most competitive warranty coverage and service in the Manufactured Housing Industry.



[www.stylecrestinc.com](http://www.stylecrestinc.com) | 800.945.4440

# North-AC AccuCharge® MC-Coil Split Systems (SEER2)

Nominal Tons <sup>1</sup>	Style Crest Item #	AHRI Model #	Cooling Capacity	SEER2	EER2	R-410A Charge	MCA	MOP	Sound
2	RSA3QD4MIRN24	RSA3QD4MIRN24K	23 MBH	13.4	11.0	67 Oz	12.2	<b>20 A</b>	74 dB
2.5	RSA3QD4MIRN30	RSA3QD4MIRN30K	29 MBH	13.4	11.0	72 Oz	14.7	<b>25 A</b>	75 dB
3	RSA3QD4MISN36	RSA3QD4MISN36K	34.8 MBH	13.4	11.0	65 Oz	17.7	<b>30 A</b>	74 dB
3.5	RSA3QD4MISN42	RSA3QD4MISN42K	40 MBH	13.4	11.0	71 Oz	24.7	40 A	79 dB
4	RSA3QD4MISN48	RSA3QD4MISN48K	45.5 MBH	13.4	11.0	74 Oz	32.7	<b>40 A</b>	79 dB


1) Refer to AHRI listings for actual capacities and performance data.

Nom. Tons <sup>1</sup>	Style Crest Item #	Item Width	Item Depth	Item Height	Minimum Pad Size	Liquid Line ø	Suction Line ø	Ship Width	Ship Depth	Ship Height	Ship Weight	UPC/GTIN
2	RSA3QD4MIRN24	23 3/4"	23 3/4"	28 1/2"	24" x 24"	3/8"	3/4"	27 1/2"	27 1/2"	30 3/4"	115 lbs	663132448784
2.5	RSA3QD4MIRN30	23 3/4"	23 3/4"	36 1/2"	24" x 24"	3/8"	3/4"	27 1/2"	27 1/2"	38 3/4"	131 lbs	663132448760
3	RSA3QD4MISN36	23 3/4"	23 3/4"	36 1/2"	24" x 24"	3/8"	3/4" <sup>2</sup>	27 1/2"	27 1/2"	38 3/4"	133 lbs	663132448746
3.5	RSA3QD4MISN42	31 3/4"	31 3/4"	29 1/4"	32" x 32"	3/8"	7/8"	35 1/2"	35 1/2"	30 3/4"	174 lbs	663132448722
4	RSA3QD4MISN48	31 3/4"	31 3/4"	33 1/4"	32" x 32"	3/8"	7/8"	35 1/2"	35 1/2"	34 3/4"	179 lbs	663132448609

2) Line set vapor line increases to 7/8" over 24 ft equivalent length.


## Micro-Channel Indoor (Evaporator) A-Coil Matches with TXV

Nom. Tons <sup>1</sup>	Condenser Item #	Indoor Coil Item #	AHRI Cert. #	Coil Height	Min. Coil Box Ht.
2	RSA3QD4MIRN24	C84QAMX24U-B	209439710	18"	20"
2.5	RSA3QD4MIRN30	C84QAMX30U-B	209439711	18"	20"
3	RSA3QD4MISN36	C84QAMX36U-B	209439712	18"	20"
3.5	RSA3QD4MISN42	C84QAMX42U-B	209439713	18"	20"
4	RSA3QD4MISN48	C84QAMX48U-B	209439714	25"	26"

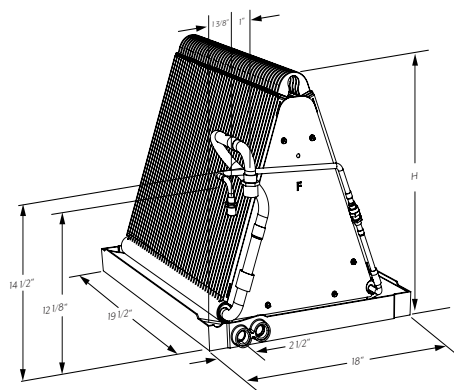

## AccuCharge R-410A Line Sets

Line Set Item #	Line Length	Liquid Line ø	Suction Line ø	Suction Insul.
4463Q1531	15 ft	3/8"	3/4"	3/8"
4463Q2031	20 ft	3/8"	3/4"	3/8"
4463Q2531	25 ft	3/8"	3/4"	3/8"
4463Q3031	30 ft	3/8"	3/4"	3/8"
4463Q4031	40 ft	3/8"	3/4"	3/8"
4463Q5031	50 ft	3/8"	3/4"	3/8"
4473Q1531	15 ft	3/8"	7/8"	3/8"
4473Q2031	20 ft	3/8"	7/8"	3/8"
4473Q2531	25 ft	3/8"	7/8"	3/8"
4473Q3031	30 ft	3/8"	7/8"	3/8"
4473Q4031	40 ft	3/8"	7/8"	3/8"
4473Q5031	50 ft	3/8"	7/8"	3/8"
4473Q7031	70 ft	3/8"	7/8"	3/8"

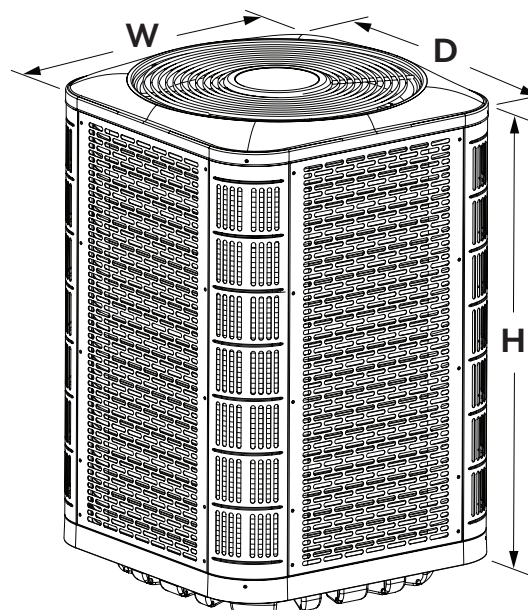

Note: A furnace blower upgrade and/or time delay relay-TDR may be required to achieve the published AHRI-rated performance.